INCH-POUND

MIL-C-3098/55D
10 April 1995
SUPERSEDING
MIL-C-3098/55C
23 June 1975

MILITARY SPECIFICATION SHEET


CRYSTAL UNIT, QUARTZ, CR-77/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-3098.

Pertinent characteristics: 17 MHz to 62 MHz; third overtone; noncontrolled; series.

Inches	mm
.002	0.05
.003	0.08
.008	0.20
.010	0.25
.015	0.38
.025	0.64
.030	0.76
.040	1.02
.150	3.81
.175	4.45
.183	4.65
.192	4.88
.238	6.05
.402	10.21
.435	11.05
.530	13.34

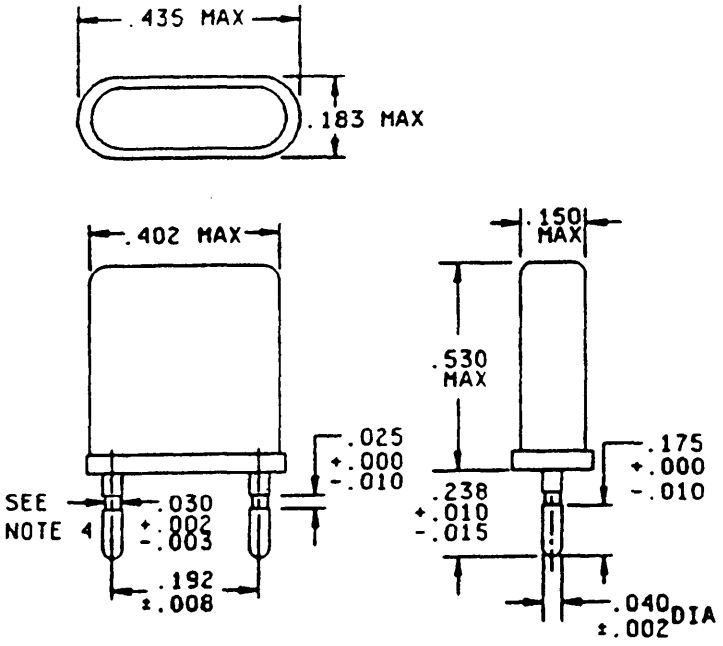

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be in accordance with MIL-C-3098.
4. The pin undercut may be omitted.

FIGURE 1. Crystal unit - CR-77/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Holder: HC-25/U (MIL-H-10056/11) or HC-42/U (MIL-H-10056/29) or HC-50/U (MIL-H-10056/37).

Dimensions, marking, and configuration: See figure 1.

Frequency range: 17.0 MHz to 62.0 MHz, inclusive.

Capacitance, shunt: 7 pF, maximum.

Frequency tolerances:

Primary operating temperature range: ±20 ppm.

Secondary operating temperature range: ±30 ppm.

Equivalent resistance: 40 ohms, maximum.

Mode of oscillation: Third overtone.

Drive Level, rated: 2.0 ± 0.4 mW.

Operating temperature ranges:

Primary: -40°C to +90°C, inclusive.

Secondary: -55°C to -40°C, and +90°C to 105°C, inclusive.

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Thermal shock:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration: MIL-STD-202, method 204, test condition A.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±5 ppm.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:34Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, MC, SH
Air Force - 17, 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5955-0680-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:34Z
Check the source to verify that this is the current version before use.