INCH-POUND
MIL-PRF-3098/56G
12 January 2005
SUPERSEDING
MIL-PRF-3098/56F
27 August 1997

PERFORMANCE SPECIFICATION SHEET


CRYSTAL UNIT, QUARTZ, CR85/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 0.8 MHz to 20 MHz; fundamental; noncontrolled; series resonance.

Inches	mm
.000	0.00
.002	0.05
.005	0.13
.008	0.20
.010	0.25
.015	0.38
.020	0.51
.025	0.64
.030	0.76
.035	0.89
.040	1.02
.050	1.27
.075	1.91
.141	3.58
.238	6.05
.317	8.05
.352	8.94
.486	12.34
.725	18.42
.757	19.23
.775	19.69

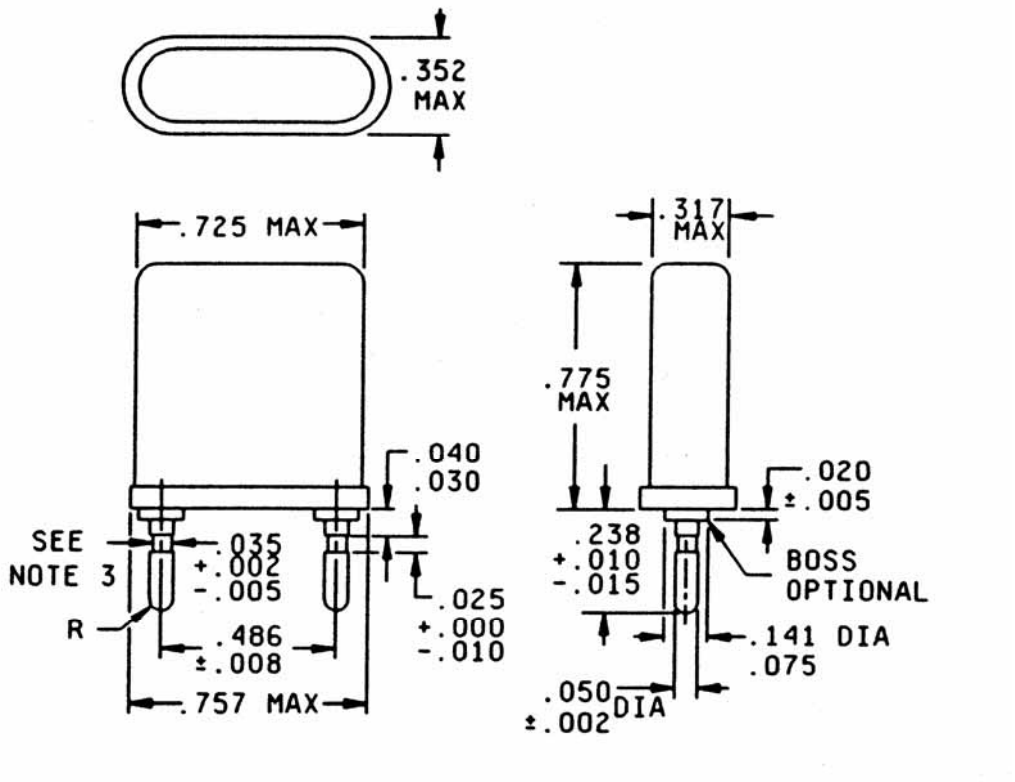

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking shall be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR85/U.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 0.8 MHz to 20 MHz, inclusive.

Capacitance, shunt: 7.0 pF, maximum.

Frequency tolerance:

Primary operating temperature range: ±20 parts per million (ppm).

Secondary operating temperature range: ±30 ppm.

Equivalent resistance: See table I.

TABLE I. Equivalent resistance.

Frequency range, inclusive	Maximum resistance
MHz	Ohms
0.80 to 0.85	520
0.85+ to 0.90	480
0.90+ to 1.00	440
1.00+ to 1.12	400
1.12+ to 1.25	380
1.25+ to 1.37	340
1.37+ to 1.50	300
1.50+ to 1.62	280
1.62+ to 1.75	250
1.75+ to 1.87	220
1.87+ to 2.00	190
2.00+ to 2.12	170
2.12+ to 2.25	150
2.25+ to 2.60	130
2.60+ to 3.00	90
3.00+ to 3.40	70
3.40+ to 3.75	52
3.75+ to 4.00	45
4.00+ to 5.00	37
5.00+ to 7.00	25
7.00+ to 10.00	20
10.00+ to 15.00	18
15.00+ to 20.00	15

Mode of oscillation: Fundamental.

Operating temperature range:

Primary operating temperature range: -40°C to +90°C, inclusive.

Secondary operating temperature range: -55°C to -40°C, and +90°C to +105°C, inclusive.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:34Z
Check the source to verify that this is the current version before use.

Drive level: 1.0 mW maximum.

Resonance: Series.

Capacitance, shunt: 7.0 pF maximum.

Shock (specified pulse):	0.8 MHz to 2.0 MHz	2.0+ MHz to 20.0 MHz
Frequency change permitted:	±10 ppm	±5 ppm
Equivalent resistance change permitted:	±15 percent.	±10 percent

Vibration: Method 201 of MIL-STD-202.	0.8 MHz to 2.0 MHz	2.0+ MHz to 20.0 MHz
Frequency change permitted:	±10 ppm	±5 ppm
Equivalent resistance change permitted:	±15 percent.	±10 percent

Thermal shock:	0.8 MHz to 2.0 MHz	2.0 MHz to 20.0 MHz
Frequency change permitted:	±10 ppm.	±5 ppm
Equivalent resistance change permitted:	±15 percent.	±10 percent

Aging:

Frequency change permitted: ±5 ppm.

* Reference documents. In addition to MIL-PRF-3098, this document references the following:

MIL-STD-202

* The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-0785)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:34Z
Check the source to verify that this is the current version before use.

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:34Z
Check the source to verify that this is the current version before use.