
MILITARY SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR-80/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the crystal unit described herein shall consist of this specification and the latest issue of MIL-C-3098.

Pertinent characteristics: 50 to 125 MHz; fifth overtone; noncontrolled; series.

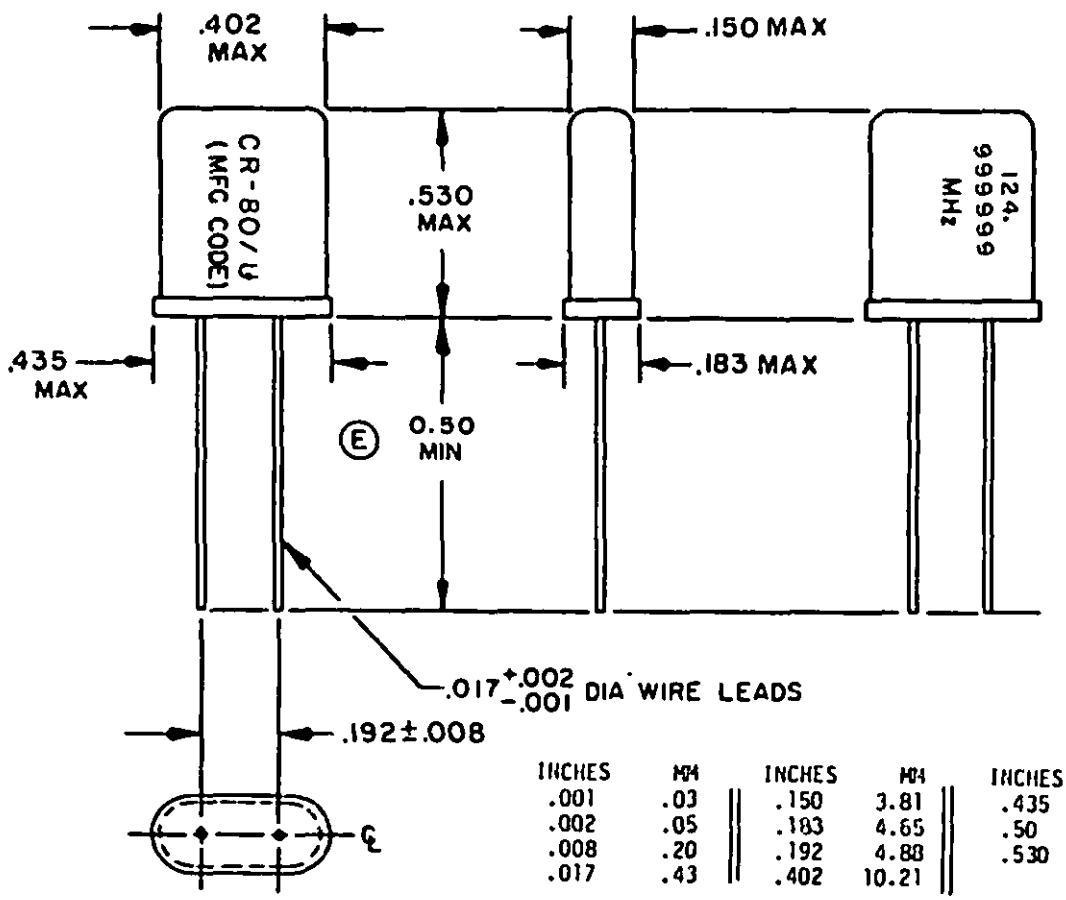

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.150	3.81	.435	11.05
.002	.05	.183	4.65	.50	12.7
.008	.20	.192	4.88	.530	13.46
.017	.43	.402	10.21		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. The type-designation, frequency, and code-designating characters shall be not less than .038 (.97 mm) in height and not less than .027 (.69 mm) in width.

FIGURE 1. Dimensions and configuration.

E denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:35Z
Check the source to verify that this is the current version before use.

TABLE I. Requirements.

Requirements	Specified value or condition
(E) Holder	HC-18/U or HC-43/U (MIL-H-10056/9)
Dimensions, marking, and configuration	See figure
Frequency range	50 to 125 MHz, inclusive
Capacitance, shunt	7 pF, maximum
Frequency tolerances:	
Primary operating temperature range	±20 PPM
Secondary operating temperature range	±30 PPM
Equivalent resistance	MHz / Ohms, maximum 50 to 90 / 50 90+ to 125 / 60
Mode of oscillation	Fifth mechanical overtone
Operating temperature ranges:	
Primary	-40°C to +90°C, inclusive
Secondary	-55°C to -40°C and +90°C to +105°C, inclusive
Government reference standard test set	TS-683/TSM or AN/TSM-15
Calibration values:	
Resistance	60 ohms
Resistor voltage drop	0.35 volt
Drive level, rated	2.0 ±0.4 mW
Shock:	
Frequency change permitted	±5 PPM
Equivalent resistance change permitted	±10 percent
Vibration: 1/	
Frequency change permitted	±5 PPM
Equivalent resistance change permitted	±10 percent
Thermal shock:	
Frequency change permitted	±5 PPM
Equivalent resistance change permitted	±10 percent
Aging:	
Frequency change permitted	±5 PPM

1/ Method 204 of MIL-STD-202, test condition A.

NOTE: NATO preferred type NXT53.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI, AR, SM
Navy - SH
Air Force - 11, 99
DLA - ES

Users activities:
Navy - AS, CG, MC, OS
Air Force - 17, 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5955-0623-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:35Z
Check the source to verify that this is the current version before use.