MIL-A-37234
20 January 1977
SUPERSEDING
MIL-G-0036587A (DM)
27 October 1970
MIL-L-36951 (DSA-DM)
21 February 1973

MILITARY SPECIFICATION

APPARATUS, ANAEROBIC CULTURE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a complete anaerobic culture apparatus suitable for isolation and cultivation of anaerobic microorganism.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-585 - Boxes, Wood, Wirebound.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-676 - Boxes, Setup, Paperboard.

Beneficial comments (recommendations, addtions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center, ATTN: Directorate of Medical Materiel, Code ATT, 2800 South 20th Street, Philadelphia, PA 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6640

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-L-10547 - Liners, Case, and Sheet, Overwrap, Water-vaporproof or Waterproof, Flexible.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-171 - Finishing of Metal and Wood Surfaces.

FEDERAL

FED-STD-66 - Steel, Chemical Composition and Hardenability.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. The material shall be as specified herein.

3.2 Design and construction. The complete Anaerobic Culture Apparatus shall consist of the following items (see fig. 1 and para. 6.3):

(a) Lid assembly
(b) Jar
(c) Generator, carbon dioxide-hydrogen
(d) Indicator, anaerobic

3.2.1 Lid assembly. The lid assembly shall consist of a lid, a gasket, a clamp with thumb screw, a catalyst reaction chamber, and a single charge catalyst packet (3.2.1.4).

3.2.1.1 Lid. The lid shall be fabricated from polycarbonate. The lid shall have an annular groove to accept the sealing gasket (3.2.1.2), a central boss on the inside surface having a female blind thread to mate with the male thread of the reaction chamber (3.2.1.3). The external surface of the lid shall be furnished with a spherical depression at the center for aligning the thumb screw and clamp (3.2.1.5) when securing the lid (3.2.1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

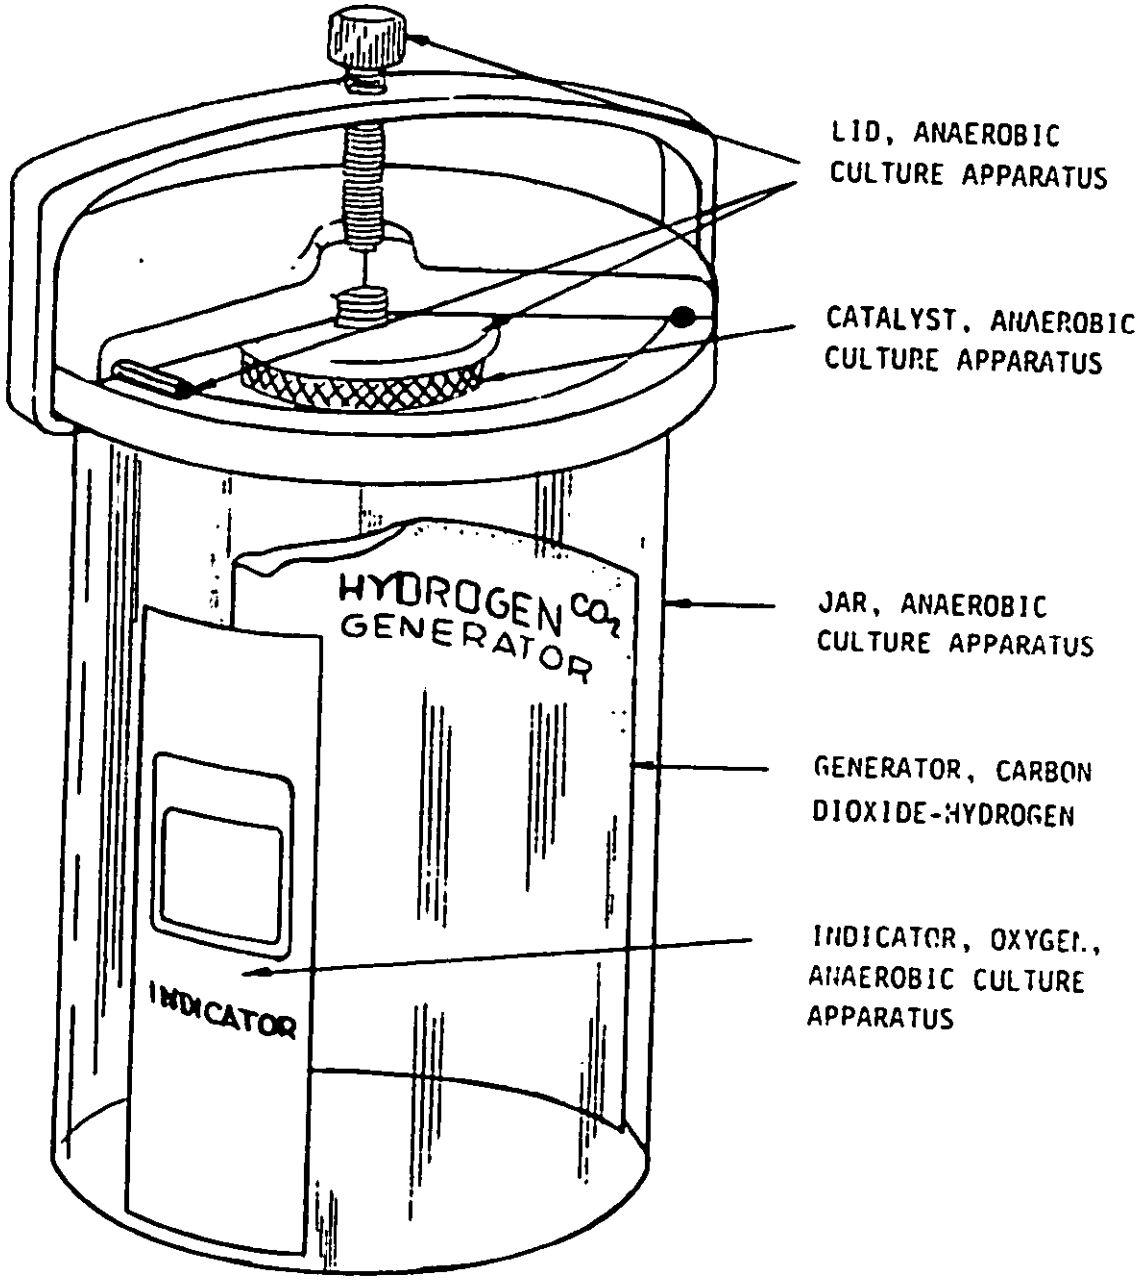


FIGURE 1. Anaerobic culture apparatus

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

3.2.1.2 Sealing gasket. The sealing gasket shall be a one piece molded O-ring having a nominal gasket material diameter of 1/4 inch. The gasket shall be molded from chloroprene or nitrile rubber having a durometer hardness of 40 to 45.

3.2.1.3 Catalyst reaction chamber. The catalyst reaction chamber shall be constructed from corrosion resistant metals. The chamber shall consist of a cap with hollow center stud with male thread to mate with the female thread provided on the lid (3.2.1.1) and a double catalyst container, one symmetrically mounted within the other and permanently secured at the joint between the top and bottom section. The internal diameter of the stud shall be as large as practicable to facilitate loading catalyst pellets, without reducing the wall thickness below the minimum required for strength and durability. The double catalyst container shall be constructed from AISI 304 corrosion resisting steel mesh in accordance with FED-STD-66. Wire mesh for the inner container shall be of 200-mesh screen size and the outer chamber of 30 mesh size. As a minimum, the threaded stud shall engage two full threads with the female thread in the lid. The catalyst reaction chamber shall be supplied with one charge of catalyst (3.2.1.4).

3.2.1.4 Catalyst. The catalyst shall consist of alumina pellets coated with 0.5 percent palladium. The pellets shall be of appropriate dimensions to facilitate loading of the reaction chamber (3.2.1.3). Pellets contained in each charge shall be adequate to cause effective anaerobiosis in a self contained anaerobic system. The catalyst charge shall be suitable for use at room temperature and shall require no heat to activate the oxygen and hydrogen to form water in the anaerobic system. The catalyst shall be capable of repeated use until incapable of activating the hydrogen and oxygen. The catalyst shall maintain an anaerobic atmosphere when tested as specified in 4.5.8. Each charge shall be sealed in a packet constructed from plastic material, suitable to protect the contents against deterioration until opened for use.

3.2.1.5 Clamp assembly. The clamp assembly shall consist of the clamp and a knurled thumb screw. The clamp shall be fabricated of polycarbonate. The clamp shall be a "C" type clamp large enough to clear the maximum diameter of the lid (3.2.1.1) and clamp beneath the flange of the jar. The clamp shall have a centrally tapped hole to accept the thumb screw. The tapped hole shall be located as to provide vertical alignment with the centrally located depression on the external surface of the lid.

3.2.1.5.1 Thumb screw. The thumb screw shall be a knurled head type and shall be fabricated from corrosion resistant metal or aluminum alloy. The length of the thread and the dimensions of the knurled head shall be such that the lid can be easily positioned and sealed on the jar flange or removed therefrom, by hand, without the need for tools. The tip end of the threaded shank shall be spherical and smooth so as not to abrade the plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

3.2.1.6 Finish. The clamp and lid shall have a smooth finish on all surfaces. All flash shall be removed and all edges rounded. The aluminum thumb screw shall have a clear or red anodized finish. The cover and threaded stud of the reaction chamber shall have a black finish per MIL-STD-171.

3.2.1.7 Material degradation. The complete lid assembly shall be autoclavable without change in shape and shall exhibit no material degradation when tested as specified in 4.5.1.

3.2.1.8 Gasket deflection. The lid containing the fully seated gasket shall not deflect more than 0.06 inch when tested as specified in 4.5.2.

3.2.1.9 Leakage test. The lid assembly shall be capable of forming a leakproof seal with the flange of the jar when tested as specified in 4.5.3.

3.2.1.10 Identification marking. The lid shall be permanently and legibly marked with the manufacturer's name and registered trademark.

3.3 Jar construction. The jar shall be fabricated of transparent polycarbonate and shall be so constructed as to be suitable for use with the lid assembly, carbon dioxide-hydrogen generator and indicator specified herein. The jar shall have an open top. The open end shall have a flange which extends completely around the outside circumference. The flange shall be integral with the jar and shall have a smooth flat top surface to cause an effective seal when mated with the O-Ring gasket of the lid assembly 3.2.1."

3.3.1 Dimensions. The jar shall have the following dimensions in inches:

Height	9 ± 1/32
Outside diameter directly below flange	5 1/8 + 0, - 1/32
Outside diameter of flange	6 ± 1/32
Thickness of flange	0.375 ± 0.005
Thickness of walls and bottom	0.187 ± 0.010

3.3.1.1 Draft angle. Jars may have a draft angle sufficient to effect an efficient molding operation.

3.3.2 Resistance to vacuum. The jar shall show no visible indication of collapse and there shall be no leakage when tested as specified in 4.5.4.

3.3.3 Resistance to pressure. The jar shall show no visible indication of expansion, it shall not burst, and there shall be no leakage when tested as specified in 4.5.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

3.4 Generator, carbon dioxide-hydrogen. The generator shall consist of a flexible laminated plastic-aluminum foil envelope containing a hydrogen (H_2) producing tablet and a carbon dioxide (CO_2) producing tablet, and a filter paper separator to control the activation of the tablets. Each generator envelope shall be a single charge and the envelope shall protect the contents from deterioration until opened for use. The generator shall be designed to provide preformed chambers and connecting channels to hold ten milliliters (ml) of water, for activation, and the tablets. When tested as specified in 4.5.6, the mixture shall produce an anaerobic atmosphere for the duration of the incubation cycle as evidence of good growth of anaerobic microorganisms and no growth of strict aerobic microorganisms. The mixture shall not leak or bubble over into the anaerobic jar. The size and shape of the generator shall not diminish the petri-dish culture capacity of the jar component.

3.4.1 Hydrogen producing tablet. The hydrogen producing tablet shall consist of a mixture of commercial grade powdered sodium borohydride and commercial grade cobalt chloride and shall be compressed into a tablet of suitable size for use in the generator envelope. The tablets shall have a nominal weight of 0.8 gram, except that for each lot the tablets shall be uniform to $\pm$ 0.1 gram from the average, and shall be readily activated in the presence of moisture to produce hydrogen gas. The controlled generation of hydrogen gas (H_2) shall be such as to produce an anaerobic atmosphere.

3.4.2 Carbon dioxide producing tablet. The carbon dioxide producing tablet shall consist of a mixture of commercial grade powdered citric acid and commercial grade sodium bicarbonate and shall be compressed into a tablet of suitable size for use in the generator envelope. The tablet shall have a nominal weight of 2.9 gram except that for each lot the tablets shall be uniform to $\pm$ 0.1 gram from the average. When in contact with moisture the tablets shall be activated to cause generation of sufficient CO_2 gas to provide an adequate CO_2 pressure and effect maximum growth characteristics.

3.4.3 Filter paper separator. The water introduced into the generator shall flow to a holding chamber and shall come into contact with the filter paper separator. The filter paper shall act as a wick and shall be designed to transmit the water at a controlled rate to activate the hydrogen tablet first and cause rapid generation of hydrogen gas to effect combination with the oxygen in the jar to form water. Moisture shall continue to be transmitted to the carbon dioxide tablet. The carbon dioxide gas released from this reaction shall be at a slower rate than the hydrogen so as to avoid interference with the hydrogen-oxygen combination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

3.4.4 Identification marking. Each envelope containing carbon dioxide and hydrogen producing chemicals shall be clearly and permanently marked with the following information:

(a) Lot or control number
(b) Item name
(c) Name and address of the manufacturer

3.4.5 Direction for use. Directions for use of the generator shall be furnished and shall be securely affixed on one face of each generator envelope. Instructions shall include preparation for use, activation of the charge and appropriate precautions, prominently indicated, to be taken by the operator, notably, the care to be observed in the handling of the hydrogen gas.

3.5 Indicator anaerobic. Each indicator shall consist of a cotton pad approximately 5/8 inch wide by 2 inches long saturated with a liquid having the property of changing its color in the presence of an anaerobic atmosphere, and when withdrawn shall resume its original color. The saturated pad shall be sealed in a plastic-aluminum foil laminate overwrap 1-3/8 ± 1/8 inches wide by 4-1/2 ± 1/8 inches long. The indicator shall change color when tested as specified in 4.5.7.

3.5.1 Identification marking. Each envelope containing anaerobic indicator shall be clearly and permanently marked with the following information.

(a) Lot or control number
(b) Item name
(c) Name and address of the manufacturer

3.6 Expiration dating period. The expiration dating period shall be 24 months for the hydrogen/carbon dioxide generator and 8 months for the anaerobic indicator.

3.6.1 Delivery. Not less than 20 months of the expiration dating period for the hydrogen/carbon dioxide generator, and not less than 7 months of the expiration dating period for the anaerobic indicator, shall remain at the time of delivery to the Government.

3.7 Workmanship. Workmanship shall be first class throughout. All components shall be free from defects which detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, and auditory, investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the materials may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and table I. The unit of product for sampling purposes shall be one anaerobic culture apparatus.

TABLE I. Sampling for examination.

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	1.0
Minor defects	II	2.5
For dimensional examination	S-2	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and table II. The inspection level shall be S-2 and the acceptance number shall be zero. The unit of product for sampling purposes shall be one item as shown in 6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

TABLE II. Sampling for tests.

Component	Characteristic	Requirement	Test procedure
Lid assembly	Material degradation	3.2.1.7	4.5.1
Lid with gasket	Deflection test	3.2.1.8	4.5.2
Lid assy. and jar	Leakage test	3.2.1.9	4.5.3
Lid assy. and jar	Resistance to vacuum	3.3.2	4.5.4
Lid assy. and jar	Resistance to pressure	3.3.3	4.5.5
Generator	Hydrogen and Carbon Dioxide generation	3.4	4.5.6
Indicator	Change of color	3.5	4.5.7
Catalyst	Formation of water	3.2.1.4	4.5.8

4.3 Examination. The anerobic culture apparatus shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the classification of defects listed in table III. Examination shall not be restricted to the classified possible defects listed below.

TABLE III. Classification of defects.

Categories	Defects
Major	
101	Component missing.
102	Component parts not free of sharp edges or corners.
103	Lid not free of warpage.
104	Thumb screw not vertical in clamp. Finish not as specified.
105	Lid not easily attached or removed from the anaerobic jar by hand.
106	Sealing gasket ("O" ring) not secure or evenly placed in groove.
107	Depression not centrally located on external surface.
108	The mesh containers of the reaction chamber damaged.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

Categories	Defects (Continued)
Major	
109	Thread on thumb screw damaged.
110	Component parts not free of cracks, voids or blemishes.
111	Jar not free of cracks, chips, crazing, bubbles, straie or blisters.
112	Jar flange not smooth on "O" ring mating surface.
113	Generator or indicator envelope not free of delamination, crushing, holes, tears, cracks or other damage.
114	Catalyst pellets not of appropriate size to facilitate loading in reaction chamber.
115	Packet containing catalyst charge, not free of holes or tears.
116	Packets not completely sealed.
117	Catalyst charge containing more than 10 percent fragmented pellets.
118	Marking incomplete, illegible or missing.
Minor	
201	Tip end of thumb screw not smooth.
202	Jar not free of scratches and scuff marks.
203	Jar not free of haze and light distortion.
204	Generator not free of folds, irregular or jagged edges.

4.3.2 Dimensional examination. The component parts shall be examined for defects in dimensions. Any dimensions not within the tolerances specified herein shall be classified as a defect.

4.4 Packaging inspection. The inspection of the unit package, packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and marking requirements of MIL-STD-129.

4.5 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.5.1 Material degradation test. The lid assembly shall be autoclaved at 250° Fahrenheit (°F) and 15 pounds per square inch (psi) for ten minutes. After cooling to room temperature, the lid assembly components shall be examined for change in shape or material degradation.

4.5.2 Gasket deflection test. The lid with the gasket fully seated shall be placed with the gasket down on a rigid, flat surface. The height of the lid from the flat surface shall be measured. A ten pound load shall be applied to the thumb screw tip socket. The height of the lid shall again be measured with the load in place and the difference in loaded and unloaded heights computed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

4.5.3 Leakage test. Place an activated hydrogen-carbon dioxide generator into an anaerobic apparatus jar and immediately secure a lid assembly to the jar. After standing one hour, there shall be no leakage of gas as evidenced by immersing the anaerobic apparatus upright into water and examining for gas bubbles escaping from the gasket area.

4.5.4 Resistance to vacuum. For purposes of this test, and the test specified in 4.5.5, a lid shall be modified by drilling a hole for attaching an air fitting. A vacuum pump shall be attached to the fitting by suitable means. The modified lid shall be clamped onto an anaerobic jar. No sealing compound shall be used on the seal or jar flange. Turn on the vacuum pump and evacuate the jar to a pressure of 730 millimeters (mm) of mercury (Hg) below the ambient pressure. This pressure shall be maintained for a period of thirty minutes. At the end of the thirty minute period the jar shall be examined for fractures and visible signs of deformation at anytime during test.

4.5.5 Resistance to pressure. The modified lid (4.5.4) shall be clamped onto an anaerobic jar. No sealing compound shall be used on the seal or jar flange. Attach a positive pressure pump to the lid fitting by suitable means. Turn the pump on and increase the internal pressure of the jar to 620 millimeters of mercury (mm Hg) above the ambient pressure. This pressure shall be maintained for a period of thirty minutes. At the end of the thirty minute period the jar shall be examined for fractures and visible signs of deformation. If necessary, to maintain pressure, additional clamps may be used for securing lid to jar. Caution shall be exercised in performing this test. The jar assembly shall be placed in protective chamber or similar device to prevent injury should jar fracture or lid assembly blow off.

4.5.6 Performance tests.

4.5.6.1 Culture cycle. An anaerobic system shall be set up using the component items listed in paragraph 3.2 and a culture cycle test performed as follows:

Procedure:

1. Place the following cultures in the anaerobic jar.

   a. 2 Petri dish plate cultures of soybean casein digest agar with blood, seeded with a strict anaerobic microorganisms (Cl. Novyi).*

   b. 2 Petri dish plate cultures of soybean casein digest agar with blood, seeded with a strict aerobic microorganism (Sarcina lutea).*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

2. Activate the hydrogen generator by adding 10 ml. of water into the generator envelope.

3. Place the lid in position and turn the knurled clamp screw until hand tight.

4. Incubate the closed anaerobic jar at 35° C for 48 hours. Note that the indicator decolorizes as anaerobiosis is attained within the jar.

5. At the end of the incubation period removed the lid and examine plate cultures for growth and lack of growth respectively.

* Agar plates shall be seeded from 24 to 48 hours with Fluid Thioglycollate medium cultures of Cl. novyi ATCC 9690, and Sarcina lutea ATCC 9341.

4.5.7 Indicator, Anaerobic. The indicator shall be considered satisfactory when it changes color during the culture cycle test specified in 4.5.6.1. Such a color change indicates an anaerobic atmosphere and the successful operation of the generator.

4.5.8 Catalyst. The reaction chamber as shown in figure 1 including the palladium charge indicated in 3.2.1.4, shall be tested with the other system components as specified in 4.5.6.1 of this specification. Obtaining an anaerobic condition indicates a successful operation of the catalyst.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. One jar; or one lid assembly; or one box containing ten catalysts; or one package containing one hundred generators; or one package containing one hundred indicators as specified, constitutes one unit of issue.

5.1.2 Level A.

5.1.2.1 Unit packaging.

5.1.2.1.1 Jar. Each jar shall be packaged in a box of appropriate size constructed in accordance with PPP-B-636, type CF, class domestic. Box shall be designed with suitable interior fittings or shall contain sufficient cushioning material to insure against shifting of or damage to contents. Closure of box shall be as specified in the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

5.1.2.1.2 Lid assembly. Each lid assembly shall be packaged in a box of appropriate size constructed in accordance with PPP-B-636, type CF, class domestic. Box shall be designed with suitable interior fittings or shall contain sufficient cushioning material to insure against shifting of, or damage to contents. The catalyst of the lid assembly shall be packaged in sealed plastic. Closure of box shall be as specified in the appendix of PPP-B-636.

5.1.2.1.3 Catalyst. Each unit (ten catalysts) shall be packaged in a box of appropriate size constructed in accordance with PPP-B-566, PPP-B-676 or PPP-B-636, type CF, class domestic. Closure of box shall be as specified in the appendix of the applicable box specification.

5.1.2.1.4 Generator. Each unit (one hundred generators) shall be packaged as specified in 5.1.2.1.3.

5.1.2.1.5 Indicator. Each unit (one hundred indicators) shall be packaged as specified in 5.1.2.1.3.

5.1.2.2 Intermediate packaging. The number of units specified in table IV, shall be packaged in a box constructed in accordance with PPP-B-636, type CF, class domestic. Closure of box shall be as specified in the appendix of PPP-B-636.

5.1.3 Level C. Units shall be packaged in a manner that will afford adequate protection against corrosion, deterioration and physical damage during shipment from supply source to the first receiving activity.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. The number of units as specified in table IV, shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather resistant, grade V3c. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.1.1 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraph of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard box shall be waterproof as specified in the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. The number of units as specified in table IV, shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type, PPP-B-621, class 1; or PPP-B-636, type CF, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

TABLE IV. Packaging quantities.

Item	Intermediate package	Exterior container
Jar	Not required	6 units
Lid assembly	12 units	48 units
Catalyst	12 units	96 units
Generator	Not required	12 units
Indicator	10 units	20 units

5.2.3 Level C. The packaged units shall be packed in shipping containers in a manner that will afford adequate protection against damage during direct shipment from supply source to the first receiving activity. These packs shall conform to the applicable carrier rules and regulations.

5.3 Marking. Each unit package, intermediate package, and exterior container shall be marked as specified in MIL-STD-129. Type II shelf life markings shall be shown as specified in MIL-STD-129 on the containers containing the generators and indicators. See para 3.6 for expiration dating period. In addition, the containers containing the indicators shall be marked with the legends:

"STORE BETWEEN 2° - 8° C. (35° - 46° F.)"

AND

"DO NOT PERMIT FREEZE"

NOTE: The unrefrigerated shipping time for the indicators shall be not more than 288 hours (12 days).

6. NOTES

6.1 Intended use. The item covered by this specification is a self-contained anaerobic system whose intended use in a laboratory is to support the growth of fastidious anaerobic organisms which sometimes fail to grow, or grow poorly in the absence of carbon dioxide.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) National stock number of the item.
(c) Selection of applicable levels of packing and packaging.

6.3 This specification covers the following individual items which are components of the complete self contained ANAEROBIC CULTURE APPARATUS, appearing in the Federal Supply Catalog.

National Stock No.	Item Identification
6640-00-926-7655	JAR, ANAEROBIC CULTURE APPARATUS
6640-00-001-6670	LID, ANAEROBIC CULTURE APPARATUS
6640-00-933-8739	CATALYST, ANAEROBIC CULTURE APPARATUS (replacement charge)
6640-00-935-6863	GENERATOR, CARBON DIOXIDE-HYDROGEN
6640-00-145-1150	INDICATOR, OXYGEN

6.4 Lid assembly material. Lexan thermoplastic which has been found to be satisfactory is manufactured by the General Electric Company, Plastic Avenue, Pittsfield, MA 01201.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
DLA-DM

Project No. 6640-0945

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-A-37234 APPARATUS, ANAEROBIC CULTURE

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:15Z
Check the source to verify that this is the current version before use.