MILITARY SPECIFICATION

DRESSES, WOMAN'S,
Cotton-Polyester, Static Resistant, Pleated Front

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and six sizes of a short sleeve surgical, operating, pleated front, static resistant, cotton-polyester, woman's dress.

1.2 Classification. The dresses shall be furnished in the following six sizes, as specified (see 6.2):

SIZES					
26-28	30-32	34-36	38-40	42-44	46-48

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

DDD-L-20	Label; For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-B-676	Box Setup

Military

MIL-F-10884	Fasteners, Snap
MIL-T-43548	Thread, Polyester, Cotton-Covered
MIL-T-43624	Thread, Polyester, Spun

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-TEST METHOD STD NO. 191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL FIRE CODES

(Application for copies should be addressed to the National Fire Protection Association, International (NFPA), 470 Atlantic Avenue, Boston, Mass. 02110)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Materials and components. The materials and components shall conform to the applicable specifications and standards as listed or required herein.

3.1.1 Fabric.

3.1.1.1 Dress. The dresses shall be fabricated from a fabric having a composition of a nominal 65 percent polyester, 34 percent combed cotton, one percent austenitic type, corrosion-resistant, stainless steel fibers having a diameter of 8 microns. The fabric shall conform to Table I when inspected as specified in 4.3.1 through 4.3.1.3, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE I
COTTON-POLYESTER DRESS FABRIC PROPERTIES

CHARACTERISTICS	REQUIREMENTS
Weave	Plain
Ply of yarn:	
Warp	Single
Filling	Single
Yarns per inch, minimum:	
Warp	70
Filling	50
Breaking strength, pounds minimum:	
Warp	90
Filling	90
Ounces per square yard, minimum	4.8
Nonfibrous materials, percent maximum	2.0
pH	5.0 to 9.0
Shrinkage, percent maximum:	
Warp	3.0
Filling	3.0
Anti-Static properties, maximum:	
Surface resistivity, ohms per unit square	1×10^{11}
OR	
Static decay, seconds	0.5

3.1.1.1.1 Color. The color of the dress fabric shall be a vat dyed Grayish Green shade. When inspected as specified in 4.3.1.2, the color of the cloth shall approximately match the color of the standard shade (see 6.3). The use of dyes or substances containing elementary sulfur or compounds capable of oxidation to sulfuric acid is prohibited. The dyed and finished fabric shall show not more than a slight trace of labile sulfur when inspected as specified in 4.3.1.

3.1.1.1.2 Colorfastness. When inspected as specified in 4.3.1, the dyed and finished fabric shall show colorfastness to light, laundering, persipiration and dry crocking equal to or better than the standard sample.

3.1.1.2 Pockets, yokes, half belts, tie cords, facings, flap, tunnel and snap fastener reinforcing patch. The pockets, yokes, half belts, tie cords, facings, flap, tunnel and snap fastener reinforcing patch shall be fabricated from the cotton-polyester-metallic fabric, 3.1.1.1 through 3.1.1.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

3.1.2 Thread. All the sewing operations shall be performed with the cotton-covered, polyester thread conforming to MIL-T-43548, Ticket Number 70 and Ticket Number 50, 2 ply; or the spun polyester thread conforming to MIL-T-43624, Class 1 or 2, Ticket Number 70, 2 or 3 ply or Ticket Number 40, 3 ply and Ticket Number 50, 3 ply (see Table II). When spun polyester thread is used, the Ticket Number 40, 3 ply and Ticket Number 50, 3 ply may be substituted for the Ticket Number 50, 2 ply; and the Ticket Number 70, 2 or 3 ply may be substituted for the Ticket Number 70, 2 ply (see Table II). The color of the thread shall approximately match the color of the fabric, 3.1.1.1.1., when inspected as specified in 4.3.1.2.

3.1.3 Snap fasteners. The snap fasteners shall conform to MIL-F-10884, Style 3, except that the snap fasteners shall be fabricated from 300 series stainless steel.

3.1.4 Tape.

3.1.4.1 Bias binding. The bias binding tape shall be fabricated from the dress fabric, 3.1.1.1 through 3.1.1.1.2, cut on a 45 degree bias, 1-1/2 inches wide.

3.1.4.2 Scissors holding. The scissors holding tape for holding two scissors shall be of a strength and construction suitable for the intended purpose. The scissors holding tape shall be undyed, untreated and fabricated from cotton. The width of the tape shall be 1/2 to 5/8 inch. The length of the tape shall conform to the patterns (see right front pattern A certificate of quality shall be submitted for this item (see Table IV).

3.2 Design. The dress shall have bungalow type sleeves, a yoke in the neck area to give a stitched-down collar effect with "V" front, round neckline, two pleats on each side of the front held in position by stitched-down half-belts, and two patch pockets with a concealed two scissors holder in the right pocket. The back shall have an overlapping snap fastener closure with two snap fasteners located at the neck area and one snap fastener in the center of the opening, and a tie cord on each side in the back waist area. The dress shall conform in appearance to Figure 1.

3.3 Construction.

3.3.1 Cutting. The dresses shall be cut in strict accordance with the patterns furnished by the Government (see 6.4) which show seam allowance, size, shape, and placement of the pockets, scissors holding tape, snap fasteners, tunnel and tunnel openings, directional lines for cutting, and notches or markings for the proper assembly of all the parts. The Government patterns shall not be altered in any manner and shall be used for making the working patterns. The working patterns shall be identical to the Government furnished patterns. The component parts shall be cut from the same ply of the lay. The flap, tunnel, tie cords, facings and snap fastener patches may be cut from the ends. The tie cords may also be prefabricated fron one continuous piece of the dress cloth and then cut to the proper length as required by the patterns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

3.3.2 Shade and size marking, Except for those parts cut from the ends (see 3.3.1), all the component parts of the dress shall be marked or ticketed by any commercial method to insure a uniform shade throughout the dress and for the proper assembly of the dresses. No metal fastening device or sewn-on ticket shall be used. The shade and size markings may be accomplished by the use of an ink pad numbering machine, rubber stamp, or pencil, provided the markings do not show through the outerside of the dresses and are not deleterious to the cloth. The markings placed on the seam allowance shall not be visible on the outerside of the dresses. The adhesive type shade and size marking tickets may be used for the shade and size markings, provided they conform to 3.3.2.1. The assembled dress shall not contain any shade or size marking ticket nor any marking that was used for locating the position for attaching of any component.

3.3.2.1 Adhesive shade and size marking tickets. The adhesive shade and size marking tickets shall be fabricated from paper and shall contain a thermo-activated type adhesive on one side. The adhesive shall not discolor or damage the cloth and the adhesive mass shall not adhere to the cloth, upon removal of the ticket. The heat used to attach the thermo-activated adhesive tickets shall not stiffen, scorch, or damage the cloth in any manner.

3.3.3 Replacement of defective components and cut parts. Care shall be exercised during the spreading, cutting and manufacturing processes to assure that any component and cut part containing any material defect or damage that is classified in this specification as a defect shall be replaced with a non-defective and properly matched component or cut part, as applicable.

3.3.4 Seams and stitching. All the seams and stitching used in the fabrication of the dresses shall conform to Table II. The seam and stitch types shall conform to FED-STD-751. When two or more seam or stitch types are specified for the same part of the operation, the contractor may select one of them for the operation. The minimum and maximum number of stitches for each operation shall conform to Table II. When Stitch Type 401 is used, the looper thread shall be on the innerside of the garment. The two rows of stitching attaching the facing to the innerside of the end of each sleeve opening shall be 5/16 to 3/8 inch apart. The sleeve facings and the bias binding tape shall be uniform in width, smooth and flat. The bight of all the overedge stitching shall be 3/16 to 7/16 inch from the edge of the coth. The two rows of stitching attaching the sides and bottom of the pockets to the fronts shall be 3/16 to 1/4 inch apart. The outer row of the stitching shall be 1/16 inch from the edge. The seam allowances shall be maintained so that no runoff or open seam shall occur. All seams shall start and finish uniformly. No seam or component shall be twisted, puckered or pleated and no part of the dress shall be caught in an unrelated operation or seam. All the thread ends shall be trimmed to a maximum length of 1/4 inch. Except for the ends of the bias binding tape and tie cords, no cut or raw edge shall be visible on the interior or exterior of the dress.

Source: https://assist.dla.mil -- Downloaded: 202640-21T10:11Z
Check the source to verify that this is the current version before use.

3.3.4.1 Sewing. Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching, in any row, shall be maintained within a tolerance of the plus or minus 1/32 inch. The same tolerance for spacing and parallelism shall be applicable for the double row of stitches. The ends of the Stitch Type 301 stitching that are not caught in other seams or stitching shall be backstitched, by overlapping on themselves, a minimum of 1/2 inch. Each thread break, skip, and run-off shall be overstitched not less than 1/2 inch. Skipped stitches or thread breaks on Stitch Type 401 stitching may be repaired using Stitch Type 301. The thread tension shall be maintained so that there shall not be any loose or tight stitching and the lock shall be embedded in the materials sewn together.

3.3.5 Manufacturing operation requirements. The dresses shall be manufactured in accordance with the operation requirements specified in Table II. The supplier is not required to follow the exact sequence of operations listed, unless otherwise specified. Any additional basting or holding stitches used to facilitate the fabrication of the dresses are permissable provided the thread does not show on the surface of the assembled dress.

Source: https://assist.dla.mil -- Downloaded: 202640-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Attach scissors holding tape to the right front.					
	a. Position the scissors holding tape on the right front as indicated by the patterns. The length of the tape shall conform to the patterns.					
	b. Bartack the tape to the right front. The bartacks shall be centered and located 1/4 inch from each end. The middle bartack shall be located in the center of the tape within 1/8 inch. Each bartack shall be 3/8 inch long.	Bartack		21 per bartack	50/2	50/2
2.	Hem pockets.					
	a. Turn the top of the pocket down with the raw edge turned under and stitch to the pocket 1/16 to 1/8 inch from the edge of the hem. The width of the hem shall be 1 ± 1/8 inch.	301	EFb-1	8 to 12	50/2	50/2
3.	Set pockets.					
	a. Turn under the raw edges of the sides and bottom of the pockets for the amount specified by the patterns and stitch to the front with double needle stitching (see 3.3.4).	301	LSd-2	8 to 12	70/2	70/2
	b. Each attached pocket shall be 6-1/4 ± 1/4 inches wide and 6-1/4 ± 1/4 inches long.					
	c. Bartack the upper left and right side corners of each pocket with 1/2 inch long vertical bartack. The bartacks shall be located between the double rows of stitching.	Bartack		28 per bartack	50/2	50/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
4.	Form pleats and attach the half belts.					
	a. Form the two pleats for the amount indicated by the patterns.					
	b. Fold under the raw edges of the half belts, except for the straight end which shall be caught in the side seams and stitch to fronts in the position specified by the patterns with one row of stitching 1/16 to 1/8 inch from the folded edge.	301	LSd-1	8 to 12	50/2	50/2
5.	Attach the front yoke to the front.					
	a. Superimpose the yokes on the surface of the front so that the top cut edge of the yoke coincides with the neck cut edge and that the left top folded yoke edge overlaps the right top folded yoke edge (side edges folded to form the "V",) Join together with one row of stitching 1/8 to 3/16 inch from the edge.	301	SSa-1	8 to 12	50/2	50/2
	b. The center point of the "V" shall be centered on the front within 1/4 inch.					
	c. Fold under the unattached edges of the yoke for the amount specified by the patterns and attach to the front with one row of stitching 1/16 to 1/8 inch from the folded edge. Also attach the folded edges at the "V" portion (see operation 5a).	301	LSd-1	8 to 12	50/2	50/2
6.	Form the tie cord.					
	a. Fold under both sides and overlap one edge and stitch through all the plies. The stitching shall be approximately in the center of the cord. The width of the assembled tie cord shall be 9/16 ± 1/16 inch. The length shall be as specified by the patterns.	301	EFj-1	8 to 12	50/2	50/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
7.	Tunnel entrances left and right backs.					
	a. The tunnel entrances shall be straight vertical buttonholes, barred at each end. The stitching shall be securely caught in the fabric. The opening shall be 7/8 ± 1/8 inch. The edges of the buttonholes shall not be ragged.	Button-hole		60 - 64 per button-hole including bars	50/2	50/2
8.	Tunnel and tie cords.					
	a. Fold under the top and bottom edges of the tunnel for the amount specified in the patterns and attach across the entire left and right backs, in the position specified in the patterns, with one row of stitching 1/16 to 1/8 inch from the folded top and bottom edges. The sides shall not be stitched down (see operation 15a).	401	LSd-1	8 to 12	50/2	70/2
	b. The width of the attached tunnel shall be 1-3/4 ± 1/8 inches.					
	c. Insert the tie cord into the tunnel until one end is flush with the side edge of the back that is to be joined to the front. Center the tie cord in the tunnel and bartack the tunnel, back, and the cord together with 1/2 inch long vertical bartack centered and 3/8 ± 1/8 inch from the side edge.	Bartack		28 per Bartack	50/2	50/2
9.	Attach the back yokes to the left and right backs and to the flap.					
	a. Superimpose the yokes on the surface of the backs and flap at the top. The cut edges shall coincide and join together with one row of stitches 1/8 to 3/16 inch from the edge.	301	SSa-1	8 to 12	50/2	50/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
9.	(continued)					
	b. Fold under the unattached bottom edges of the yokes for the amount specified by the patterns and attach to the backs and flap with one row of stitching 1/16 to 1/8 inch from the folded edge.	301	LSd-1	8 to 12	50/2	50/2
	c. The sides of the yokes shall not be turned under or stitched down (see operations 10a, 11b, 12a, 13a and 15a).					
10.	Hem the flap.					
	a. Overedge stitch the bottom of the flap.	503 504 or 505	EFd-1	8 to 12	70/2	70/2
	b. Turn the right side of the back flap down with the raw edge turned under and stitch to the flap 1/16 to 1/8 inch from the edge of the hem. The width of the hem shall be 1/2 ± 1/16 inch. This also includes the side of the yoke at the top of the flap.	301	EFb-1	8 to 12	50/2	50/2
11.	Hem the right back.					
	a. Turn the side which is to contain the female snap fasteners (left side) down with the raw edge turned under and stitch to the back 1/16 to 1/8 inch from the edge for the distance specified in the patterns. This also includes the side of the yoke at the top of the right back.	301	EFb-1	8 to 12	50/2	50/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
12	Join the left and right backs, flap and snap fastener reinforcing patch.					
	a. Join the left and right back sections together and as indicated by the patterns catch the flap in the same seam and stitching. In addition, the snap fastener reinforcing patch and the sides of the yoke at the top of the left and right backs should also be caught in the same seam and stitching.	512 515 516 517 518 or 519	SSa-2 SSa-2	8 to 12 8 to 12	50/2 50/2 (chain) and 70/2 (overedge)	50/2 70/2
	b. Utilizing the selvage of the cloth, fold a triangular piece of cloth, 3-1/2 inches on the straight side by 2-1/2 inches on each angular side. The cut edges shall be caught in the operation 12a seam. The apex of the patch shall be of sufficient size and in the proper location to properly reinforce the male snap fastener.					
	c. The flap at 1-1/4 ± 1/8 inch from the bottom of the flap, shall be attached to the right back section with one row of horizontal stitching.	301	LSa-1	8 to 12	50/2	50/2
	d. Bartack the attachment of the bottom of the flap with 1/2 inch long horizontal bartacks located approximately 1/4 inch from each side. The bartacks shall be either on the horizontal row of stitching or just below.	Bartack		28 per bartack	50/2	50/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
13.	Join the left and right backs to the front at the shoulders and sleeve extensions.					
	a. Join the backs to the front at the shoulders and sleeve extensions. Also catch the sides of the yokes at the top of the backs and front in this seam.	512 515 516 517 518 or 519	SSa-2 SSa-2	8 to 12 8 to 12	50/2 50/2 (chain) and 70/2 overedge)	50/2 70/2
14.	Face each sleeve opening.					
	a. Fold the ends of the sleeves under for the amount designated by the patterns and each side of the facing 1/4 to 3/8 inch and attach to the inside of the sleeve opening with stitching as specified in 3.3.4. The width of the attached facing shall be 1/2 ± 1/16 inch.	301	SSc-2	8 to 12	50/2	50/2
15.	Join the left and right backs to front at the sides and sleeves.					
	a. Join the backs to the front at the sides and sleeves. Also catch the half belts, tunnel and tie cords.	512 515 516 517 518 Or 519	SSa-2 SSa-2	8 to 12 8 to 12	50/2 50/2 (chain) and 70/2 overedge)	50/2 70/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE II (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
16.	Bind the neck area.					
	a. Fold under each side of the bias binding tape for 3/8 ± 1/16 inch. Fold in half and insert the cut edges in the neck area between the folded tape. Attach the top of the yokes, backs, flap and front with one row of stitching 1/16 to 1/8 inch from the bottom side of the folded bias binding tape. The ends of the tape shall be flush with the sides of the flap and back within 1/16 inch.	301	BSc-1	8 to 12	50/2	50/2
	b. Bartack the ends of the tape with 1/2 inch long vertical bartacks. Each bartack shall be located 3/16 ± 1/16 inch from the top of the tape and close to the side of the flap and back.	Bartack		28 per bartack	50/2	50/2
17.	Hem the bottom of the dress.					
	a. Fold under the bottom of the dress with the raw edges turned under to form a hem 1-3/4 to 2 inches wide. The stitching shall be 1/16 to 1/8 inch from the edge.	301	EFb-1	8 to 12	50/2	50/2
18.	Attach the snap fasteners.					
	a. Attach the three sockets with the pronged ring on the right side of the back opening in the position indicated by the patterns.					
	b. Attach the three studs with the eyelets on the flap on the left side of the back opening in such a manner that they shall align and mate with the sockets without causing any distortion, twisting or puckering of the backs. The snap fastener patch shall also be caught between the stud and eyelet located in the approximate center of the flap (single thickness of the cloth) (see operation 12b).					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE II (Cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
19.	Attach the labels.					
	a. Position the identification label on the innerside of the back flap. Attach the label on all four sides. If desired, the top edge of the identification label may be caught in the neck bias binding tape seam, the left side in the flap hem seam and the right side in the joining seam of the left back and flap. Attach the bottom of the label.	301	LSbj-1	8 to 12	50/2	50/2
	b. Position the washing information label just below the identification label and attach on all four sides. If desired, the top edge of the washing information label may be caught in the bottom seam of the identification label. Attach the remaining three sides.	301	LSbj-1	8 to 12	50/2	50/2
20.	Trim all thread ends and remove all thread scraps and foreign matter.					
21.	Mate all three snap fasteners and fold each dress to an approximate size of 10 by 11 inches without creating any wrinkles or creases.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

3.4 Dimensions. The dresses after assembly shall conform to the dimensions for the different sizes specified in Table III when measured as specified in 4.3.5. The variation in length between the left and right sleeve dimensions shall not exceed 1/4 inch in any dress.

TABLE III
DRESS DIMENSION IN INCHES

LOCATION	SIZE						TOLERANCE
	26-28	30-32	34-36	38-40	42-44	46-48	
BUST	18	20	22	24	26	28	± 1/2
WAIST	15	17	19	21	23	25	± 1/2
HIPS	19	21	23	25	27	29	± 1/2
LENGTH	39-1/2	40	41	42-1/2	42-1/2	42-1/2	± 1/2
SWEEP	48	52	56	60	62-1/2	67	± 1

3.5 Labels.

3.5.1 Identification. The identification label shall conform to DDD-L-20, Type I, Class 1, Launderable Label. The size of the label shall be adequate to contain the following information:

DRESS WOMAN'S, COTTON-POLYESTER, STATIC RESISTANT
MIL-D-37206
SIZE
CONTRACT OR ORDER NUMBER
NSN
WOOL OR FIBER PRODUCTS ACT INFORMATION

3.5.1.1 Alternate identification. An alternate identification label fabricated from cotton coutil or poplin cloth having a greige weight of 2.11 yards per pound (45 inch width) may be used in lieu of the label specified in 3.5.1. The printing medium and printing shall conform to DDD-L-20, Type I, Class 1, Launderable Label. The label shall contain the same information as specified in 3.5.1.

3.5.2 Washing information. The washing information label shall conform to DDD-L-20, Type I, Class 3, Launderable Label. The label shall contain the following information:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

1. For machine washing. Use wash and wear cycle or durable press cycle. Wash with moderately hot water (140°F), using soap or mild detergent.

2. For hand washing. Wash in moderately hot water as described above. DO NOT WRING OR TWIST.

3. Dry in tumble dryer at medium setting.
Remove immediately at end of drying.
Shape and hang.

4. To drip dry, remove from water before last spin cycle.
Shape and hang.

5. If touching up is required, iron at a moderate heat setting.

DO NOT REMOVE THIS LABEL

3.5.3 Washing instructions. A lightweight, white paper washing instruction label with legible and durable black characters shall be placed on top of the folded dress prior to packaging. The paper label shall be visible and capable of being read through the polyethylene film bag (see 5.1.3). The size of the letters and numerals shall be 10 point minimum in capitals. The size of the paper instruction label shall be at the option of the supplier. The label shall contain the following information:

WASHING INSTRUCTIONS

OPERATION	LEVEL (INCHES)	TEMPERATURE °F	TIME MINUTES	SUPPLIES PER 100 POUNDS OF GARMENTS
1. Flush	12	Cold	3	none
2. Suds	6	140	10	sodium metasilicate sodium tripolyphosphate (STPP) 0.5 pounds nonionic detergent 1.0 pounds (1 pint) brightener (whites only) 1.0 ounce
After 10 minutes at 140°F raise to 160°F for 10 minutes.				
3. Rinse	10	150	3	
4. Bleach (white only)	10	150	5	1% sodium hypochlorite 2.0 quarts (rinse colors instead)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

WASHING INSTRUCTIONS (cont'd)

OPERATION	LEVEL (INCHES)	TEMPERATURE °F	TIME MINUTES	SUPPLIERS PER 100 POUNDS OF GARMENTS
5. Rinse	10	135	3	
6. Rinse	10	120	3	
7 Rinse	10	105	3	
8. Sour	6	Cold	5	ammonium silicofluoride 1 ounce

Notes: A. Wash Polyester-Cotton only with Polyester-Cotton
B. Wash whites separately, be sure wheel is clean
C. Load wheel only to 2/3 its rated capacity

3.6 Workmanship. The dresses shall not contain any spot, stain, hole, abraded area, tear, cut, mend, patch, scorch, or needle chew. The snap fasteners shall be clinched without distortion, damage, splitting or cutting of the cloth. The metal components shall not be malformed, misaligned, fractured, broken, or distorted nor contain any corrosion, scale, pit, dent, crack, burr, sliver, or sharp edge. The dresses shall conform to the quality of grade established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material and component inspection. In accordance with 4.1, the materials and components shall be inspected and tested in accordance with all the requirements of the referenced specification and standards, unless otherwise excluded amended, modified, or qualified in this specification or purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

4.1.2 Certificate of quality. When certificates of quality are submitted in accordance with Table IV, they shall contain verifiable actual test and inspection data. The Government reserves the right to inspect and test the components to verify the validity of the certification.

4.1.3 Inspection. Inspection, as used in this specification, is defined as both examination (an investigation without the use of special laboratory apparatus or procedures such as visual) and testing (a determination by technical means of the physical and chemical properties) of the item.

4.2 Quality conformance inspection. The sampling and inspection shall conform to MIL-STD-105 except where otherwise indicated hereinafter. The quality conformance inspection shall consist of the tests and examinations specified in Table IV.

4.2.1 Sampling.

4.2.1.1 Inspection lot.

4.2.1.1.1 Dress fabric. An inspection lot size shall be expressed in units of one linear yard of the dress fabric and shall consist of all the dress fabric received by the dress manufacturer at one time. The sample unit for inspection shall be two linear yards.

4.2.1.1.2 Alternate identification label fabric. An inspection lot size shall be expressed in units of one linear yard of the alternate identification label fabric and shall consist of all the alternate identification label fabric received by the dress manufacturer at one time. The sample unit for inspection, shall be one linear yard.

4.2.1.1.3 Scissors holding tape. An inspection lot size shall be expressed in units of one linear yard of the scissors holding tape and shall consist of all the scissors holding tape received by the dress manufacturer at one time. The sample unit for inspection shall be one linear yard.

4.2.1.1.4 Dresses. An inspection lot size shall be expressed in units of one dress made essentially under the same conditions and from the same material and components. The sample unit for inspection shall be one dress.

4.2.1.1.5 Preparation for delivery. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing dresses of one size, fully prepared for delivery from essentially the same materials and components. The sample unit for inspection shall be one shipping container, containing dresses of one size, fully prepared for delivery with the exception that it need not be sealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

4.2.1.2 Sampling for tests and examinations of the dress and alternate identification label fabrics, scissors holding tape, dresses and preparation for delivery. The sample size, acceptance criteria, tests and examinations required for the dress and alternate identification label fabrics, scissors holding tape, dresses, or the preparation for delivery, as applicable, shall be as specified in Table IV.

TABLE IV
SAMPLE SIZE, ACCEPTANCE CRITERIA, TESTS AND EXAMINATIONS REQUIRED FOR THE DRESS AND ALTERNATE IDENTIFICATION LABEL FABRICS, SCISSORS HOLDING TAPE, DRESSES, AND PREPARATION FOR DELIVERY

ITEM	INSPECTION	PARAGRAPH REQUIREMENT	PARAGRAPH METHOD	SAMPE SIZE	ACCEPTANCE CRITERIA	
Dress Fabric 1/	Polyester Identification	3.1.1.1	4.3.1.1	2/	2/	3/
	Cotton Identification	3.1.1.1	4.3.1	2/	2/	3/
	Stainless Steel Identification	3.1.1.1	4.3.1.1	2/	2/	3/
	Percent Polyester	3.1.1.1	4.3.1.1	2/	2/	3/
	Percent Cotton	3.1.1.1	4.3.1.1	2/	2/	3/
	Percent Stainless Steel Fiber	3.1.1.1	4.3.1.1	2/	2/	3/
	Diameter of Stainless Steel Fiber	3.1.1.1	4.3.1.1	2/	2/	3/
	Weave	3.1.1.1	4.3.1.1	2/	2/	3/
	Ply of Yarn	3.1.1.1	4.3.1.1	2/	2/	3/
	Yarns per Inch	3.1.1.1	4.3.1	2/	2/	
	Breaking Strength	3.1.1.1	4.3.1	2/	2/	
	Weight	3.1.1.1	4.3.1	2/	2/	
	Non Fibrous Materials	3.1.1.1	4.3.1	2/	2/	
	pH	3.1.1.1	4.3.1	2/	2/	
	Shrinkage	3.1.1.1	4.3.1	2/	2/	
	Anti-Static Properties	3.1.1.1	4.3.1.3	2/	2/	
	Color	3.1.1.1.1	4.3.1.2	2/	2/	3/
	Kind of Dye	3.1.1.1.1	4.3.1.1	2/	2/	3/
	Labile Sulfur	3.1.1.1.1	4.3.1	2/	2/	3/

Source: https://assist.dla.mil -- Downloaded: 202610-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE IV (cont'd)

ITEM	INSPECTION	PARAGRAPH REQUIREMENT	PARAGRAPH METHOD	SAMPLE SIZE	ACCEPTANCE CRITERIA
Dress Fabric 1/ (cont'd)	Colorfastness to:				
	Light	3.1.1.1.2	4.3.1	2/	2/
	Laundering	3.1.1.1.2	4.3.1	2/	2/
	Perspiration	3.1.1.1.2	4.3.1	2/	2/
	Dry Crocking	3.1.1.1.2	4.3.1	2/	2/
Alternate Identification Fabric 1/	Cotton Identification	3.5.1.1	4.3.2	2/	2/ 3/
	Weight	3.5.1.1	4.3.2	2/	2/ 3/
	Kind of Fabric	3.5.1.1	4.3.2.1	2/	2/ 3/
Scissors Holding Tape 1/	Material	3.1.5	4.3.3	2/	2/ 3/
	Breaking Strength	3.1.5	4.3.3	2/	2/ 3/
	Construction	3.1.5	4.3.3	2/	2/ 3/
Dresses	Visual Examination	3.3 through 3.3.5 and 3.5 through 3.6	4.3.4.1	Inspection level II	An acceptable quality level of 2.5 defects per 100 units for major defects and 10.0 defects per 100 units for total (major plus minor) defects.
	Dimensional Check	3.4	4.3.4.1	Inspection level S-3	An acceptable quality level of 4.0 defects per 100 units.
	Preparation for Delivery	Section 5	4.3.4.2	Inspection level S-2	An acceptable quality level of 2.5 defects per 100 units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

1/ The inspection of the dress and alternate identification label fabrics and the scissors holding tape, as applicable, shall be conducted either at the contractor's or subcontractor's plant.

2/ The sampling for the testing of the dress or alternate identification label fabrics and the scissors holding tape shall be in accordance with 4.2.1.1.1 through 4.2.1.1.3, as applicable, and as follows:

LOT SIZE (Yards)	SAMPLE SIZE
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The samples shall be taken from the beginning of each roll. The lot shall be unacceptable if one or more sample units fail to meet any of the requirements specified in Table IV. Each sample unit taken for inspection shall be used to determine all the characteristics of the dress or alternate identification label fabric and the scissors holding tape, as applicable, specified in Table IV.

3/ A certificate of quality shall be submitted and will be acceptable for the stated requirement (see 4.1.2).

4.3 Inspection methods.

4.3.1 Dress fabric. The dress fabric characteristics shall be determined in accordance with the inspection methods of FED-STD-191 specified in Table V and 4.3.1.1 through 4.3.1.3.

TABLE V
DRESS FABRIC PROPERTIES

Characteristics	FED-STD-191 Method
Cotton Identification	1200
Yarns per Inch	5050
Breaking Strength	5100
Weight	5041
Nonfibrous Materials	2611
pH	2811
Shrinkage	5552
Labile sulfur	2020
Colorfastness to:	
Laundering (3 cycles)	5610 1/
Light	5660
Perspiration	5680
Dry crocking	5651

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

1/ The staining of the cotton fiber only on the color transfer cloth shall be evaluated. The test specimen shall be dried after each laundering.

4.3.1.1 Polyester and stainless steel fiber identification, fiber content, weave, ply of yarn and kind of dye. The identification of the polyester and stainless steel fiber, fiber content, weave, ply of yarn and the kind of dye shall be determined by any standard commercial method.

4.3.1.2 Color matching. The color of the dress fabric and the thread shall be compared to the approved shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin.

4.3.1.3 Anti-static properties. The anti-static properties of the dress fabric shall be determined in accordance with NFPA-56A.

4.3.2 Alternate identification label fabric. The characteristics of the alternate identification label fabric shall be determined in accordance with the inspection methods of FED-STD-191 specified in Table VI and 4.3.2.1.

TABLE VI
ALTERNATE IDENTIFICATION LABEL FABRIC PROPERTIES

Characteristic	FED-STD-191 Method
Cotton Identification	1200
Weight	5041

4.3.2.1 Kind of alternate identification label fabric. The kind of fabric used for the alternate identification label shall be determined by any standard commercial method.

4.3.3 Scissors holding tape. The scissors holding tape characteristics shall be determined in accordance with the inspection methods of FED-STD-191 specified in Table VII.

TABLE VII
SCISSORS HOLDING TAPE PROPERTIES

Characteristic	FED-STD-191 Method
Cotton Identification	1200
Breaking Strength (Full Width)	5102
Weight	5040
Total Ends	5050
Picks per Inch	5050

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

4.3.4 Visual examination.

4.3.4.1 Dresses. Each dress selected as a sample unit from the lot shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. The classification and list of defects, Tables VIII and IX, as applicable, shall be used to classify and enumerate the defects found.

TABLE VIII
CLASSIFICATION OF DEFECTS FOR THE VISUAL EXAMINATION
OF THE ASSEMBLED DRESSES

DEFECT	MAJOR	MINOR
GENERAL		
a. Any hole, scissors or knife cut, tear, mend, burn, or weakening defect such as smash, multiple float, loose slub, needle chew, or abraded area	X	
b. Any portion of the dress stiffened or scorched by any process of manufacturing	X	
c. Any missing or broken yarn, thin place, misweave, woven in waste, loose yarn, snagged thread, area of no dye penetration, or dye streak on the exterior of the dress	1/	
SNAP FASTENERS 2/		
a. Any surface rough or containing any nick, burr, sharp edge, dent or sliver	X	
b. Any surface unclean or contains embedded foreign matter		X
c. Any malformed, misaligned, corroded, fractured, broken, chipped, bent or distorted	X	
d. Any missing, loose, improperly finished, or improperly clinched resulting in cutting of the cloth	X	
e. Any mismated, misplaced causing distortion, twisting or puckering of the backs		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE VIII (cont'd)

DEFECT	MAJOR	MINOR
SHADED PARTS		
a. Any part shaded or any shade bar		X
b. Color of any fibrous component not as specified or not uniform		X
CLEANNESS		
a. Three or more thread ends not trimmed to a maximum length of 1/4 inch or three or more thread scraps not removed.		X
b. Any unsighly slub, spot, or stain; any discoloration of the cloth caused by the removal of any shade and size marking ticket; any shade and size marking ticket, excluding the metal fastening or sewn-on kind, not removed; any shade and size marking identification stamping visible on the outerside of the dress, or any shade and size marking adhesive mass adhering to the cloth		X
c. Any metal fastening device or sewn-on shade and size marking ticket attached to the dress	X	
d. Any marking used for locating the position for attaching of any component visible on the top or underside of the dress		X
COMPONENTS AND ASSEMBLY		
a. Any component not as specified or any defect of component or defect of assembly, not herein classified	1/	
b. Any component, component part, or required operation omitted, or any operation improperly performed, not herein classified	1/	
c. Any component part not cut in accordance with the patterns (see 3.3.1), not herein classified		
d. Any dimension not as specified, not herein classified	1/	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE VII (cont'd)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING		
a. Accuracy of seaming:		
1. Any seam, hem, or attachment of any component twisted, puckered, or pleated; any part of the dress or of any component caught in an unrelated operation or stitching; any seam edge not properly forced out or containing any folds		X
2. Ends of stitching that are not caught in other seams or stitching:		
(a) Any not securely backstitched	X	
(b) Any secure but backstitched for a distance less than 1/2 inch or the backstitching is not overlapped on itself		X
3. Thread breaks:		
(a) Any not securely overstitched	X	
(b) Any secure but overstitched for a distance less than 1/2 inch		X
b. Gage of stitching 3/:		
1. Any stitching irregular, unevenly or not gaged as specified, or not uniform		X
c. Open seams 4/:		
1. Other than on any hem:		
(a) Any more than 1/8 inch but not more than 1/4 inch		X
(b) Any more than 1/4 inch	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE VII (cont'd)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING (Continued)		
2. On any hem:		
(a) Any more than 1/4 inch but not more than 1/2 inch		X
(b) Any more than 1/2 inch	X	
d. Raw edges 5/:		
1. Outerside of the dress:		
(a) Any more than 1/4 inch but not more than 1/2 inch		X
(b) Any more than 1/2 inch	X	
2. Innerside of the dress:		
(a) Any more than 1/2 inch but not more than one inch		X
(b) Any more than one inch	X	
e. Seam and stitch type:		
1. Not specified seam or stitch	1/	
2. Any looper thread on the outerside of any dress seam, when Stitch Type 401 is used	X	
f. Stitch tension:		
1. Any loose stitching 6/	1/	
2. Any tight stitching resulting in breakage of the stitches when normal pull is applied 7/	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE VII (cont'd)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING (Continued)		
g. Stitches per inch 8/:		
1. Stitches more or less than specified:		
(a) Dress (excluding labels):		
(1) One or 2		X
(2) More than 2	X	
(b) Labels:		
(1) One to 3		X
(2) More than 3	X	
h. Bartacks:		
1. Any missing, loose, misplaced, or not serving the intended purpose	X	
2. Length of any not as specified	1/	
3. Any not located as specified	1/	
i. Buttonholes (tunnel entrances):		
1. Any omitted or uncut	X	
2. Any misplaced, not specified kind or any end not barred	1/	
3. Incomplete stitching, stitching not securely caught in fabric causing stitching to pull away, ragged edge, one or more broken stitches or two or more skipped stitches in any buttonhole	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE VII (cont'd)

DEFECT	MAJOR	MINOR
DETAILED DEFECTS APPLICABLE TO SPECIFIC PARTS OF THE DRESS		
FACING		
a. Any short, tight, or twisted causing puckering or twisting to the neck area or to any sleeve opening	X	
BACK OPENING		
a. Backs uneven at the top when all the snap fasteners are mated and snapped closed:		
1. More than 1/8 inch but not more than 1/4 inch		X
2. More than 1/4 inch	X	
b. Flap:		
1. Short, tight or twisted causing puckering or twisting to any back		X
POCKETS		
a. Any pocket out of horizontal or vertical alignment:		
1. More than 3/8 inch but not more than 1/2 inch		X
2. More than 1/2 inch	X	
b. Any not of uniform size and shape		X
c. The width or length of any pocket less than 6 inches or more than 6-1/2 inches		X
HALF BELTS AND PLEATS		
a. Any half belts or pleat missing, or misplaced	1/	
b. Belts not on same plane by more than 1/4 inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE VII (cont'd)

DEFECT	MAJOR	MINOR
LABELS		
a. Identification:		
1. Size missing, incorrect, or illegible	X	
2. Other than the size information, incomplete, incorrect, or illegible		X
3. Not located as specified		X
4. Stitching omitted on one or more edges		X
b. Washing information:		
1. Any washing information missing, incorrect, incomplete or illegible	X	
2. Stitching omitted on one or more edges		X
c. Washing instructions:		
1. Any washing instructions missing, incorrect, incomplete or illegible	X	
2. Size of markings less than 10 points		X

1/ The defect shall be classified and scored as a major defect, when it seriously affects the serviceability or appearance, otherwise it shall be classified and scored as a minor defect.

2/ Each snap fastener shall be checked for proper function and attachment by snapping closed and unsnapping each snap fastener at least three times.

3/ The gage of stitching defect shall be scored only when the condition exists for more than 2 inches on any row of stitching.

4/ A seam shall be classified and scored as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-off occur. On double stitched seams, a seam shall be classified and scored as open when either one or both sides of the seam contain any of the aforementioned for a single stitched seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

5/ Any edge that should be turned under and is not, but is securely caught in the stitching, shall be classified and scored as a raw edge. Any raw edge, that is not securely caught in the stitching shall be classified and scored as an open seam.

6/ A seam shall be classified and scored as loose when the top and bobbin threads are on the same surface.

7/ Puckering is evidence of tight tension or gathering of the material. When puckering is evident and is not caused by the gathering of the material, the stitching shall be inspected for tight tension and breaking of stitches by exerting normal pull in the lengthwise direction of the stitching, by pulling the material taut to straighten out the seam. Puckering due to the gathering of the material shall be classified and scored as an accuracy of the seaming defect.

8/ The stitches per inch defect shall be scored only when the condition exists for more than 3 inches on any row of stitching.

TABLE IX

LIST OF DEFECTS FOR THE DIMENSIONS OF THE ASSEMBLED DRESSES

ASSEMBLED MEASUREMENT	DEFECT
Measure the bust, waist, hips, length, and sweep.	Any measurement deviating from the measurements specified in 3.4 and Table III and applicable tolerance shall be enumerated as a dimensional defect.
Equal length	
Sleeves	The variation in length between the left and right sleeve shall be enumerated as a dimensional defect when it exceeds 1/4 inch.

4.3.4.2 Preparation for delivery. Each of the fully prepared shipping containers, containing dresses of one size, selected as a sample unit from the lot, shall be visually examined to determine that the packaging, packing, and marking conform to this specification. The lists of defects, Table X, shall be used to enumerate the defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

TABLE X

LIST OF DEFECTS FOR PREPARATION FOR DELIVERY

ITEM	DEFECT
Exterior and interior markings	Missing, incorrect, incomplete, or illegible; size, location, sequence, or method of application not as specified; size shown on any interior or exterior container not the same; information on the washing instruction paper label in the polyethylene bag not readable through the film or no label in the polyethylene bag.
Materials	Any non-conforming component; any component or component part missing, damaged, or otherwise defective.
Workmanship	Inadequate application of the components such as incomplete closure of any interior or exterior container, container flap, or loose strapping; bulging or distortion of any container; any polyethylene bag damaged, any vent hole missing, or any open or non-continuous heat sealed seam.
Exterior and interior weight or content	Gross or net weight exceeds the requirements; number per container more or less than specified; more than one size dress in the same container; any portion of the dress caught in any heat sealed seam; any dress distorted, deformed, or bent; any not individually packaged within the polyethylene bag.

4.3.5 Procedure for measuring. The dress to be measured shall be laid flat, without tension, on a smooth, flat surface so that any wrinkles or creases shall not affect the measurement. The measurement shall be made with the use of a yardstick, metal tape or by the use of any suitable measuring device. The measurements shall be made as follows:

a. The bust dimension shall be taken at the base of the armholes, from side seam to side seam.

b. The waist measurement shall be taken at a point of the smallest curvature, approximately across the center of the half belts from side fold to side fold.

c. The hips shall be measured at a point approximately 9 inches down from where the waist dimension was taken, from side fold to side fold.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

d. The length shall be determined on the back of the garment at the center of the back from the top of the neck to the bottom of the dress.

e. The sweep dimension shall be taken along the entire bottom edge of the dress.

f. The sleeve dimension measurement shall be taken from the armhole to the bottom of the sleeve along the inseam.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One packaging containing twelve dresses, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table XI shall be packaged in each unit, intermediate and exterior container, as applicable, for the required level of protection specified in the procurement document.

TABLE XI

PACKAGING QUANTITIES

Unit package	Intermediate package	Exterior container
1 unit	Not required	6 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Each dress shall be neatly folded to an appropriate dimension of 11 inches in length and 10 inches in width. The size label shall be clearly visible in front so as to permit ready identification. Each folded dress shall be inserted in a snug fitting, clear polyethylene bag having a minimum thickness of 0.00125 inch. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape and the closure shall be effected by heat sealing or by means of a tuck or reverse flap. Twelve dresses of the same size, individually packaged in polyethylene bags, shall be packaged in a snug fitting box constructed in accordance with PPP-B-636, class domestic or PPP-B-676 except that commercial colors are acceptable. The box closure shall be secured to prevent spilling of contents under normal handling.

Source: https://assist.dla.mil -- Downloaded: 202610-21T10:11Z
Check the source to verify that this is the current version before use.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-636 class weather-resistant. The exterior container shall also conform to the special requirements as specified in PPP-B-636. Closure, strapping and waterproofing shall be as specified in the appendix of the box specification.

NOTE: Strapping will not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage or redistribution.

5.2.2 Level B.

5.2.2.1 Exterior continer. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-636, class domestic. The exterior container shall also conform to the special requirements as specified in PPP-B-636. Closure shall conform to method I or II as specified in the box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit package. Each unit package shall be marked in accordance with MIL-STD-129. Contract or purchase order number, size, and name of contractor shall be shown. When the contractor is not the manufacturer, the name of the manufacturer shall also be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

NOTE: The National Stock Number shall be shown in lieu of the Federal Stock Number wherever specified in MIL-STD-129. Marking shall not be required on polyethylene bags.

5.3.3 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The static resistant, cotton-polyester, woman's dresses covered by this specification are intended for use by the female surgical personnel of the Medical Services.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number, and date of this specification.

b. Size and quantity desired (see 1.2).

c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Standard sample for shade and colorfastness. The standard sample for shade and colorfastness will be furnished by the contracting officer.

6.4 Patterns. The patterns for the dresses will be furnished by the contracting officer to the contractor for use in cutting working patterns (see 3.3.1). The pattern parts shall consist of the following:

NOMENCLATURE	CUT PARTS
Front	1
Front yokes	2
Half belts	2
Patch pockets	2
Back left	1
Back right	1
Back yoke left	1
Back yoke right	1
Back flap	1
Back flap yoke	1
Tie cords	2
Tunnel	2

6.5 Commercial information. This specification does not include all types, classes, styles or sizes of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the items, which are normally procured to meet military requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

6.6 Catalog information. This specification is intended to cover the following items appearing in the Federal Supply Catalog:

NATIONAL STOCK NO.	ITEM IDENTIFICATION
6532-00-149-0464	DRESS, WOMAN'S Cotton-Polyester, Static Resistant, Pleated Front, 26-28, 12's
6532-00-149-0465	DRESS, WOMAN'S Cotton-Polyester, Static Resistant, Pleated Front, 30-32, 12's
6532-00-149-0466	DRESS, WOMAN'S Cotton-Polyester, Static Resistant, Pleated Front, 34-36, 12's
6532-00-149-0467	DRESS, WOMAN'S, Cotton-Polyester, Static Resistant, Pleated Front, 38-40, 12's
6532-00-149-0472	DRESS, WOMAN'S, Cotton-Polyester, Static Resistant, Pleated Front, 42-44, 12's
6532-00-149-0473	DRESS, WOMAN'S Cotton-Polyester, Static Resistant, Pleated Front, 46-48, 12's

Custodians:
Army - MD
Navy - MS
Air Force - 03


Preparing activity:
Defense Supply Agency - DM

Project No. 6532-1099


Review activities:
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.
is

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

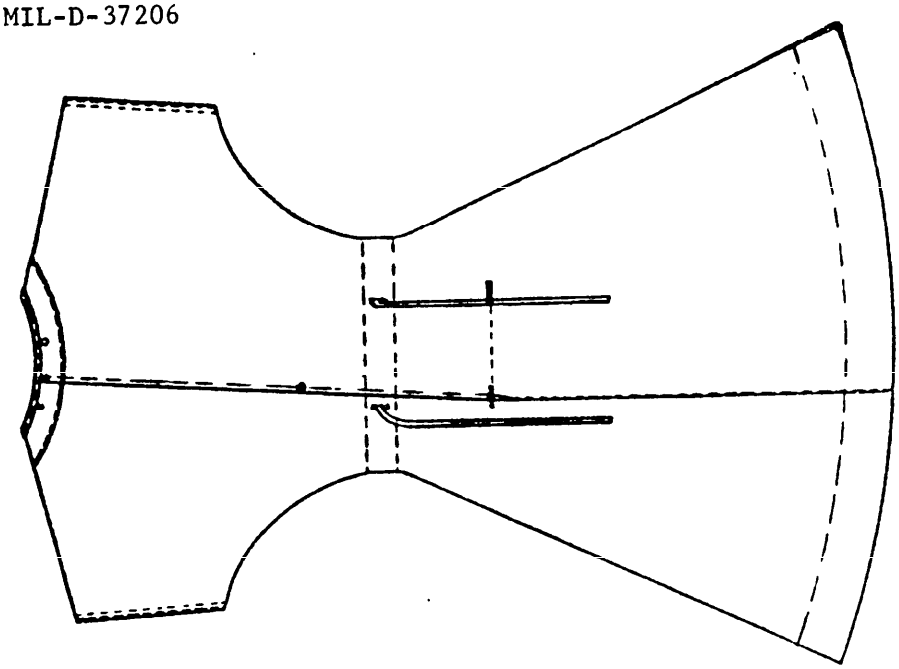

BACK

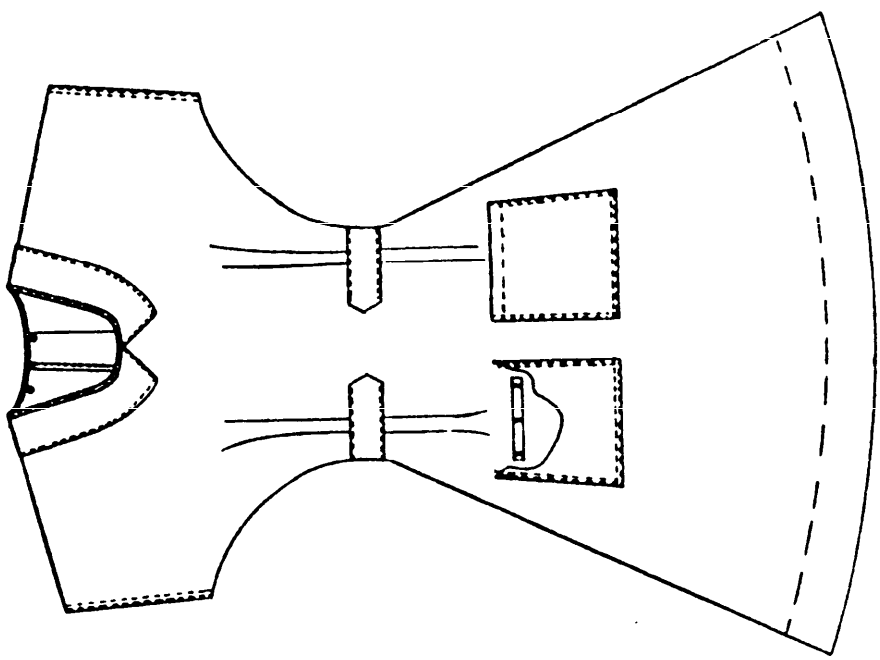

FRONT

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-DTL-37206

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.

FOLD

Defense Personnel Support Center
2800 South 20th Street
Philadelphia, PA 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Defense Personnel Support Center
ATTN: DPSC-ATT
2800 South 20th Street
Philadelphia, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:11Z
Check the source to verify that this is the current version before use.