
MILITARY SPECIFICATION SHEET

BATTERY, RECHARGEABLE, SEALED NICKEL CADMIUM BB-516/U

This specification sheet is approved for use by the Electronics Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the sealed nickel cadmium rechargeable battery type described herein shall consist of this document and the latest issue in effect of Specification MIL-B-49436(ER).

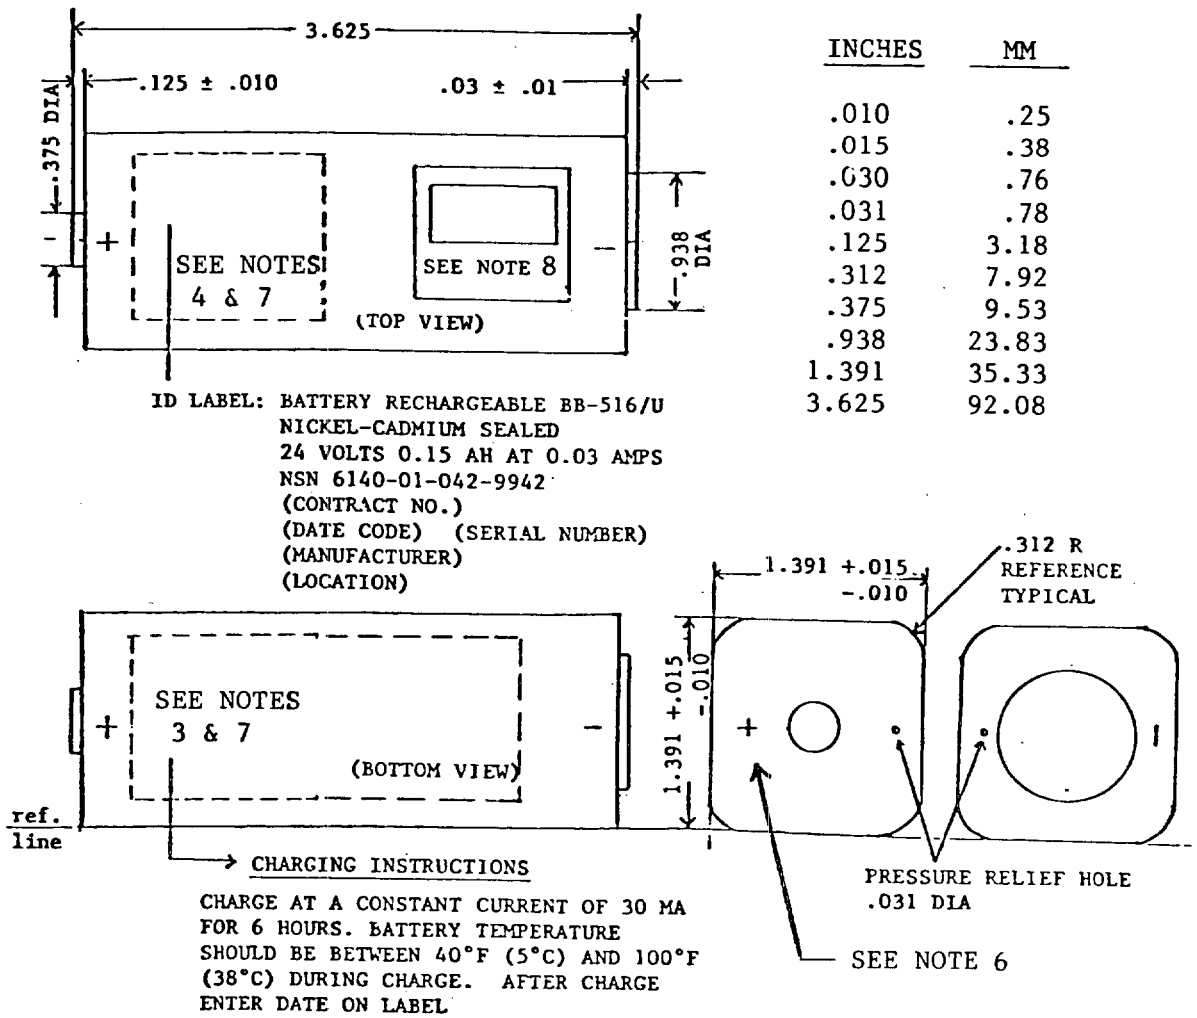

INCHES	MM
.010	.25
.015	.38
.030	.76
.031	.78
.125	3.18
.312	7.92
.375	9.53
.938	23.83
1.391	35.33
3.625	92.08

FIGURE 1. BB-516/U BATTERY DIMENSIONS AND LABELS

FSC-1640

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Rated capacity (C_5):	.15 AH
Voltage (Nominal):	24 Volts
Weight (Maximum):	.25 Kg (.55 lbs)
Terminals:	2 each MIL-N-46025 Nickel, flat surface
Number and type of cells:	20 sealed "1/3 A" size cells or equal in series
Charge rate for testing and on battery (C/5 for 6 hrs):	.03 amps

Discharge Rates	5 Second Voltage(V)	Final Voltage(V)	Current (Amps)
C/5	-	20	.03
C_5	-	20	.15
5 C_5	22	20	.75
10 C_5	-	20	1.50

Test	Discharge Rate	Capacity Requirement(AH)
Full Capacity Discharge	C_5	.13
Cycle Life, 224 cycles	C_5	.10
Overcharge, 24 hours	C_5	.13
High Rate Discharge	5 C_5	.11
Low Temperature Discharge at -30°C (-22°F)	C_5	.05
Retention of Charge 7 days at 51°C (124°F)	C_5	.065
Pulse Discharge 1.5 amps, 5 seconds on, 25 seconds off, continuously to 20 volts	10 C_5	.10
Vibration	C/5	.15

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

DRAWINGS AND SPECIFICATION NOTES

1. Except as noted, all values are minimum.
2. All charges and discharges shall be performed on fully assembled batteries through the terminals.
3. Charging instructions shall be provided on a label which will be attached to side of the battery opposite ID label.
4. Identification label shall include complete label information required in specification. It shall be located as shown on drawing and surface shall be designated as top of battery. If necessary, adjacent side may contain continuation of label content.
5. Dimensions are in inches and unless otherwise specified decimal tolerances are ± 0.031 in.
6. Symbol + on this surface; - on opposite end.
7. Labels may be an integral part of the container providing marking is permanent and clear or labels shall be separate, made of KOH resistant, non-metallic, material with permanent and clear marking.
8. Writeable charge history label.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Mounting screws for connector. Not applicable

Terminal markings. The positive terminal marking may be painted red. The negative terminal may be painted black.

Terminal. The two terminals shall be low resistance flat contacts of nickel per MIL-N-46025.

Electrical leakage. Not applicable

Immersion. Not applicable

CUSTODIAN:
ARMY-ER
REVIEWER:
ARMY - CR, AV, GL

PREPARING ACTIVITY:
ARMY-ER
(PROJECT 6140-A557-6)

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 — 605-034/4144

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:06Z
Check the source to verify that this is the current version before use.