INCH-POUND


MIL-DTL-62011/1
w/AMENDMENT 1
25 October 2018
SUPERSEDING
MIL-DTL-62011/1
27 July 2009

DETAIL SPECIFICATION SHEET

PUMP, FUEL, ELECTRICALLY-OPERATED: 24-VOLT DC, IN-TANK TYPE, TOP-MOUNTED CONNECTOR, TYPE I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-62011.

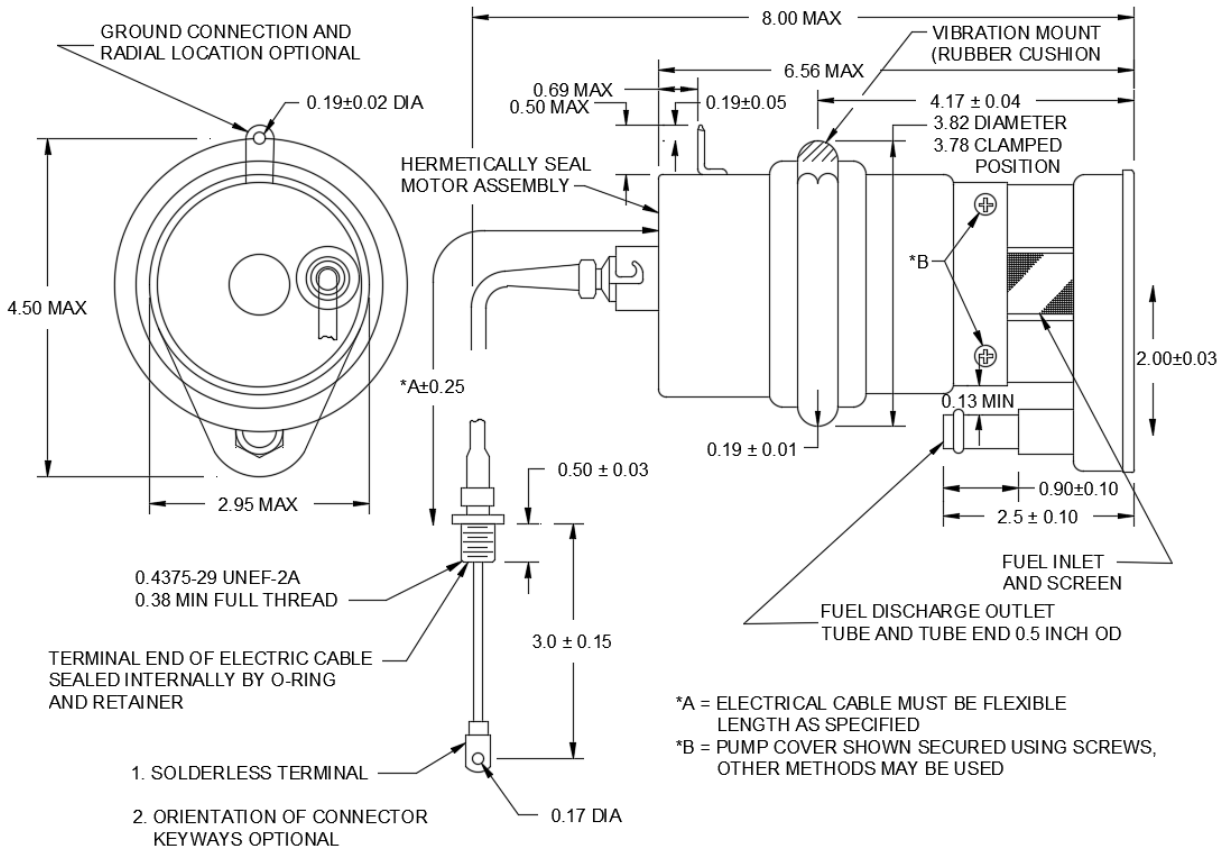

See notes at end of figure.

FIGURE 1. Fuel pump, top-mounted, envelope dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:09Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.13	3.3	2.00	50.8
.17	4.3	2.5	64.0
.19	4.8	2.95	74.9
.25	6.4	3.0	76.0
.38	9.7	3.78	96.0
.4375	11.113	3.82	97.0
.50	12.7	4.17	105.9
.69	17.5	4.50	114.3
.90	22.9	6.56	166.6
		8.00	203.2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 1. Fuel pump, top-mounted, envelope dimensions - Continued.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Pump: The pump shall be an electrically-operated 27.5-volt dc in-tank type pump conforming to the envelope dimensions on figure 1. The following details shall apply:

a. The pump shall be designed to be mounted vertically within a fuel tank.

b. The pump cover shall be secured to the pump assembly using positive means (e.g., rivets, staked pins, or screws) at a minimum of two places (see figure 1). The specific method and location is optional.

c. The inlet area of the pump shall be covered by a screen of either wire fabric industrial grade Monel or stainless steel 18 x 18 mesh with 0.017-inch (.43 mm) diameter wire (see figure 1).

Electrical connector: The pump shall be provided with a top-mounted connector. The electric cable connection shall be mounted along the top surface of the motor housing and parallel to the longitudinal axis of the pump.

Shielded electric cable: A flexible shielded cable, as defined on figure 1, of a specified length may be provided. The cable shall incorporate a grounding connection for the shielding braid. An independent ground connection shall be used.

Finish. External steel components shall be finished as specified in table I. All plating's shall be capable of meeting a minimum of 96 hours salt spray test in accordance with MIL-STD-202 Test Condition A, Method 101. The pump shall show no evidence of red corrosion after 96 hours of salt spray. Fluid passages and internal components shall not be subject to the plating thickness requirement. Fluid passages may have bare areas provided they are protected with a light film of oil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:09Z
Check the source to verify that this is the current version before use.


Openings shall be supplied with a removable plugs or covers to prevent contamination.

TABLE I. Material and finish identification codes (steel).

PIN code material/plating finish	Plating Finish
Blank	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2.
H	Zinc/Aluminum in accordance with ASTM F1136/F1136M, grade 3, NC. 1/
J	Zinc-nickel in accordance with SAE-AMS2417, type 1. 2/
N	Nickel in accordance with SAE-AMS-QQ-N-290, class 2, grade B
P	Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class 1.
R	Zinc plating in accordance with ASTM B633; type VI, Fe/Zn 5. 1/

1/ Hexavalent chromium free.
2/ The zinc-nickel alloy plate shall contain 12% to 16% nickel. The coating thickness shall be 315 micro-inches (8 micrometers) minimum.
3/ These finishes have a chromate conversion coating which includes hexavalent chromium and are not recommended.

The Part or Identifying Number (PIN) consists of the letters M, the basic specification number, specification sheet number, a dash, the cable length, and finish.

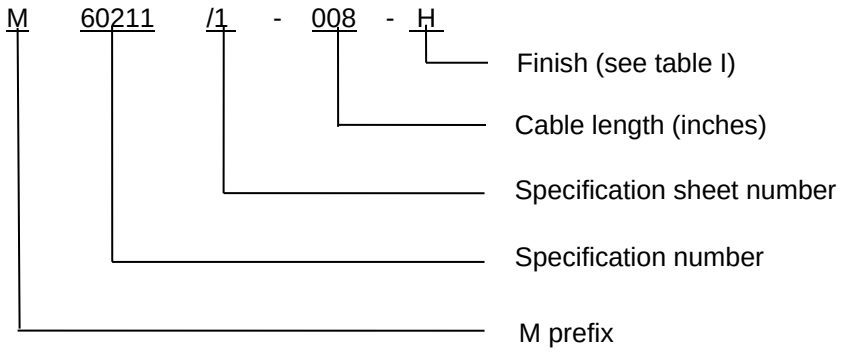

PIN example: M62011/1-008-H

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:09Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-62011, this document references the following:

MIL-DTL-16232
MIL-STD-202
ASTM B633
ASTM F1136/F1136M
SAE-AMS2417
SAE-AMS-QQ-P-416
SAE-AMS-C-81562
SAE-AMS-QQ-N-290

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - MC
DLA - CC

Preparing activity:
DLA - CC

(Project 2910-2018-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:09Z
Check the source to verify that this is the current version before use.