
METRIC
MIL-PRF-55681/10D
24 March 2024
SUPERSEDING
MIL-PRF-55681/10C
12 December 2006

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, CHIP, MULTIPLE LAYER, FIXED, CERAMIC DIELECTRIC, ESTABLISHED RELIABILITY AND NON-ESTABLISHED RELIABILITY, STYLE CDR34, METRIC

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-55681.

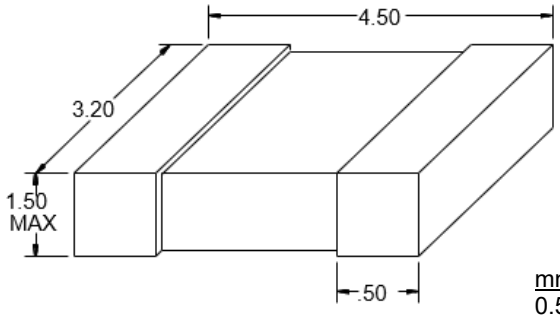

mm	Inches
0.50	.020
1.50	.059
3.20	.125
4.50	.176

NOTES:
1. Dimensions are in millimeters.
2. Unless otherwise specified, tolerance is ± 0.25 mm (.010 inch).
3. Dimensions and tolerances are for bare chips. For solder coated terminations add 0.60 mm (.023 inch) to the positive length tolerance and 0.30 mm (.012 inch) to the positive width and thickness tolerance.
4. Inch equivalents are given for general information only.

FIGURE 1. Style CDR34 capacitors.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Capacitance value: See table I.

Capacitance tolerance: F = ± 1 percent; J = ± 5 percent; K = ± 10 percent; M = ± 20 percent. See table I.

Rated voltage: See table I.

Operating temperature range: -55°C to +125°C.

Product level designator: Non-established Reliability - C; Established Reliability - M, P, R, and S.

Marking: In accordance with MIL-PRF-55681.

TABLE I. Style CDR34 capacitor characteristics.

Part or Identifying Number (PIN) 1/	Capacitance pF	Capacitance tolerance	Rated temperature and voltage-temperature limits	Rated voltage V_{dc}
CDR34BP222B - - -	2,200	F, J, K	BP	100
CDR34BP242B - - -	2,400	F, J, K	BP	100
CDR34BP272B - - -	2,700	F, J, K	BP	100
CDR34BP302B - - -	3,000	F, J, K	BP	100
CDR34BP332B - - -	3,300	F, J, K	BP	100
CDR34BP362B - - -	3,600	F, J, K	BP	100
CDR34BP392B - - -	3,900	F, J, K	BP	100
CDR34BP432B - - -	4,300	F, J, K	BP	100
CDR34BP472B - - -	4,700	F, J, K	BP	100
CDR34BP512A - - -	5,100	F, J, K	BP	50
CDR34BP562A - - -	5,600	F, J, K	BP	50
CDR34BP622A - - -	6,200	F, J, K	BP	50
CDR34BP682A - - -	6,800	F, J, K	BP	50
CDR34BP752A - - -	7,500	F, J, K	BP	50
CDR34BP822A - - -	8,200	F, J, K	BP	50
CDR34BP912A - - -	9,100	F, J, K	BP	50
CDR34BP103A - - -	10,000	F, J, K	BP	50
CDR34BX273B - - -	27,000	K, M	BX	100
CDR34BX333B - - -	33,000	K, M	BX	100
CDR34BX393B - - -	39,000	K, M	BX	100
CDR34BX473B - - -	47,000	K, M	BX	100
CDR34BX563B - - -	56,000	K, M	BX	100
CDR34BX104A - - -	100,000	K, M	BX	50
CDR34BX124A - - -	120,000	K, M	BX	50
CDR34BX154A - - -	150,000	K, M	BX	50
CDR34BX184A - - -	180,000	K, M	BX	50

1/ The complete PIN will include additional symbols to indicate capacitance tolerance, termination, and product level.

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Navy - AS, MC
Air Force - 19

Preparing activity:
DLA - CC

(Project 5910-2025-017)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:55Z
Check the source to verify that this is the current version before use.