INCH-POUND


MIL-C-55681/2B
24 July 1990
SUPERSEDING
MIL-C-55681/2A
21 March 1972

MILITARY SPECIFICATION SHEET

CAPACITORS, CHIP, MULTIPLE LAYER, FIXED, UNENCAPSULATED, CERAMIC DIELECTRIC, ESTABLISHED RELIABILITY, STYLE CDR05

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-55681.

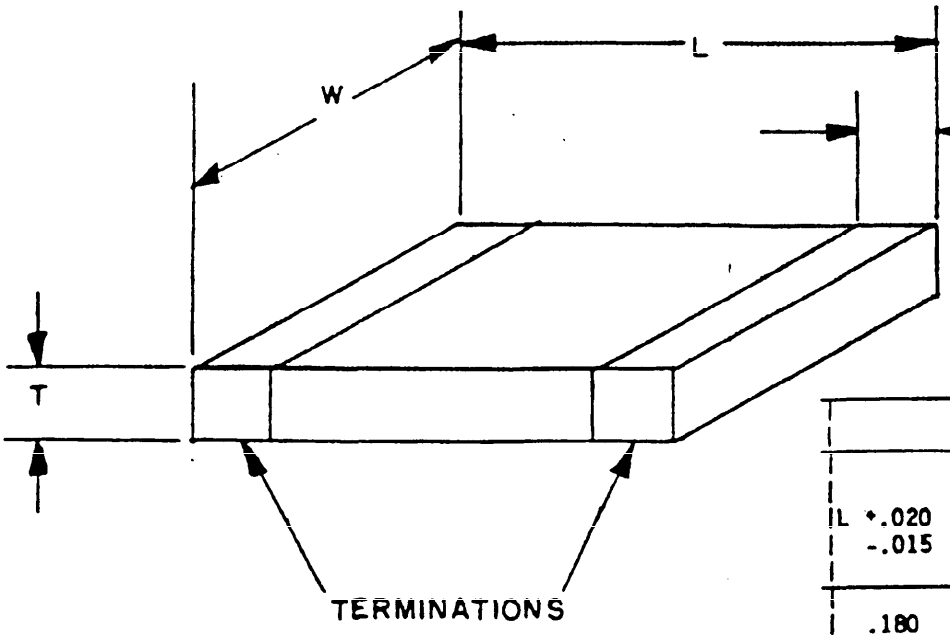

Inches	mm
.010	0.25
.015	0.38
.020	0.51
.080	2.03
.180	4.57
.250	6.35

Dimensions			
		T	
L +.020 -.015	W +.020 -.015	Min	Max
.180	.250	.020	.080

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
(B) 3. Dimensions and tolerances are for bare chips. For solder coated terminations, add .025 inch (0.64 mm) to the positive length tolerance and .015 inch (0.38 mm) to the positive width and thickness tolerance.

FIGURE 1. Styles CDR05 capacitors.

(B) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20260-22T23:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Case type: Multi-layer, unencapsulated, monolithic.

Capacitance value: See table I.

Capacitance tolerance: See table I.

Operating temperature range: -55°C to +125°C.

Marking: Full marking in accordance with MIL-C-55681.

TABLE I. CDR05 capacitor characteristics.

Type designation 1/	Capacitance	Capacitance tolerance	Rated temperature and voltage temperature limits	Rated voltage
	pF			volts, dc
CDR05BP392B	3,900	J, K	BP	100
CDR05BP472B	4,700	J, K	BP	"
CDR05BP562B	5,600	J, K	BP	"
CDR05BX683B	68,000	K, M	BX	"
CDR05BX823BK	82,000	K	BX	"
CDR05BX104B	100,000	K, M	BX	"
CDR05BX124BK	120,000	K	BX	"
CDR05BX154B	150,000	K, M	BX	"
CDR05BX224A	220,000	K, M	BX	50
CDR05BX274AK	270,000	K	BX	"
CDR05BX334A	330,000	K, M	BX	"

1/ Complete type designation shall include additional symbols to indicate capacitance tolerance (as required), termination finish, and failure rate level.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Navy - MC, SH
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1703)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:54Z
Check the source to verify that this is the current version before use.