NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-22885/82B(EC)
5 FEBRUARY 1990
SUPERSEDING
MIL-S-22885/82A(EC)
22 February 1979


PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED,

LENS ASSEMBLIES FOR, .665 SQ AND .916 LG X .665 WIDE

This specification sheet is prepared for use by Naval Electronics Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

Ⓑ The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-22885.

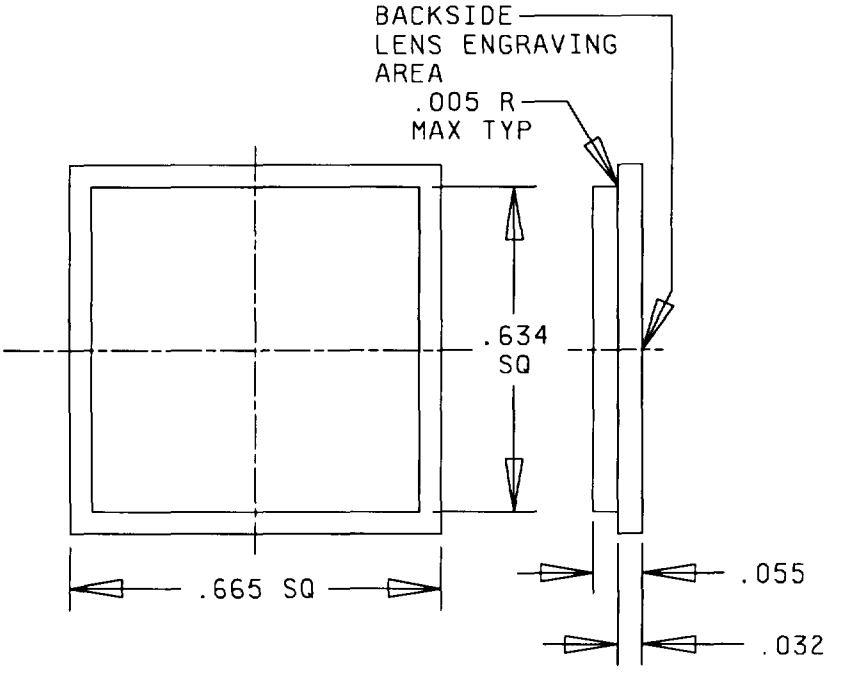

Inches	mm
.005	0.13
.032	0.81
.055	1.40
.634	16.10
.665	16.89


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm).

FIGURE 1. Front lens plate, type 1.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

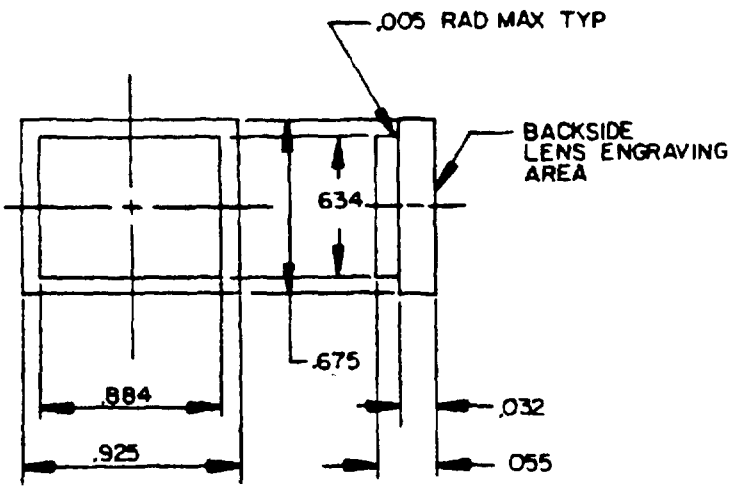


Inches	mm
.005	0.13
.032	0.81
.055	1.40
.634	16.10
.675	17.15
.884	22.45
.925	23.50


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 2. Front lens plate, type 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

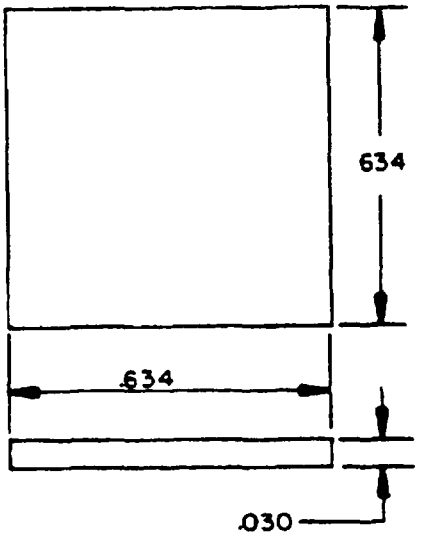


STYLE 1

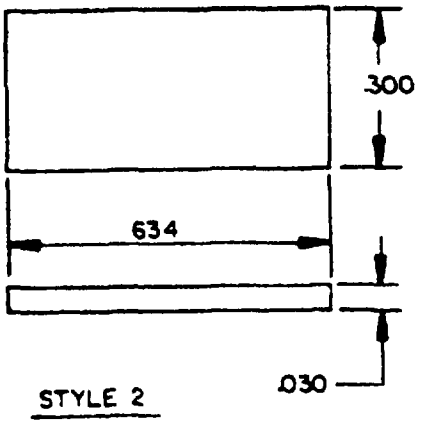


STYLE 2

Inches	mm
.030	0.76
.300	7.62
.634	16.10

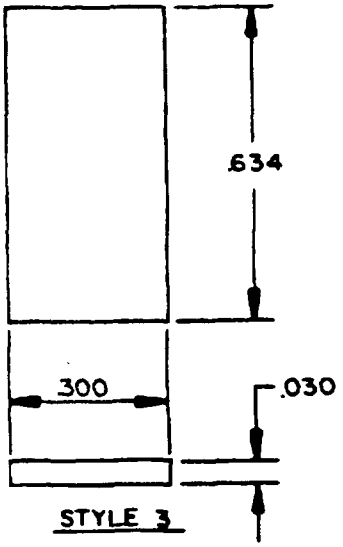

STYLE 3

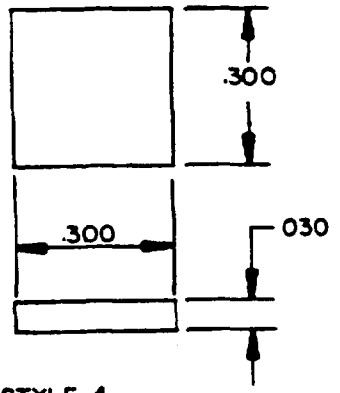


STYLE 4

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. For clarification of style see table I.
5. For part number and color see table II.

FIGURE 3. Display screen, spacer or color filter, type 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

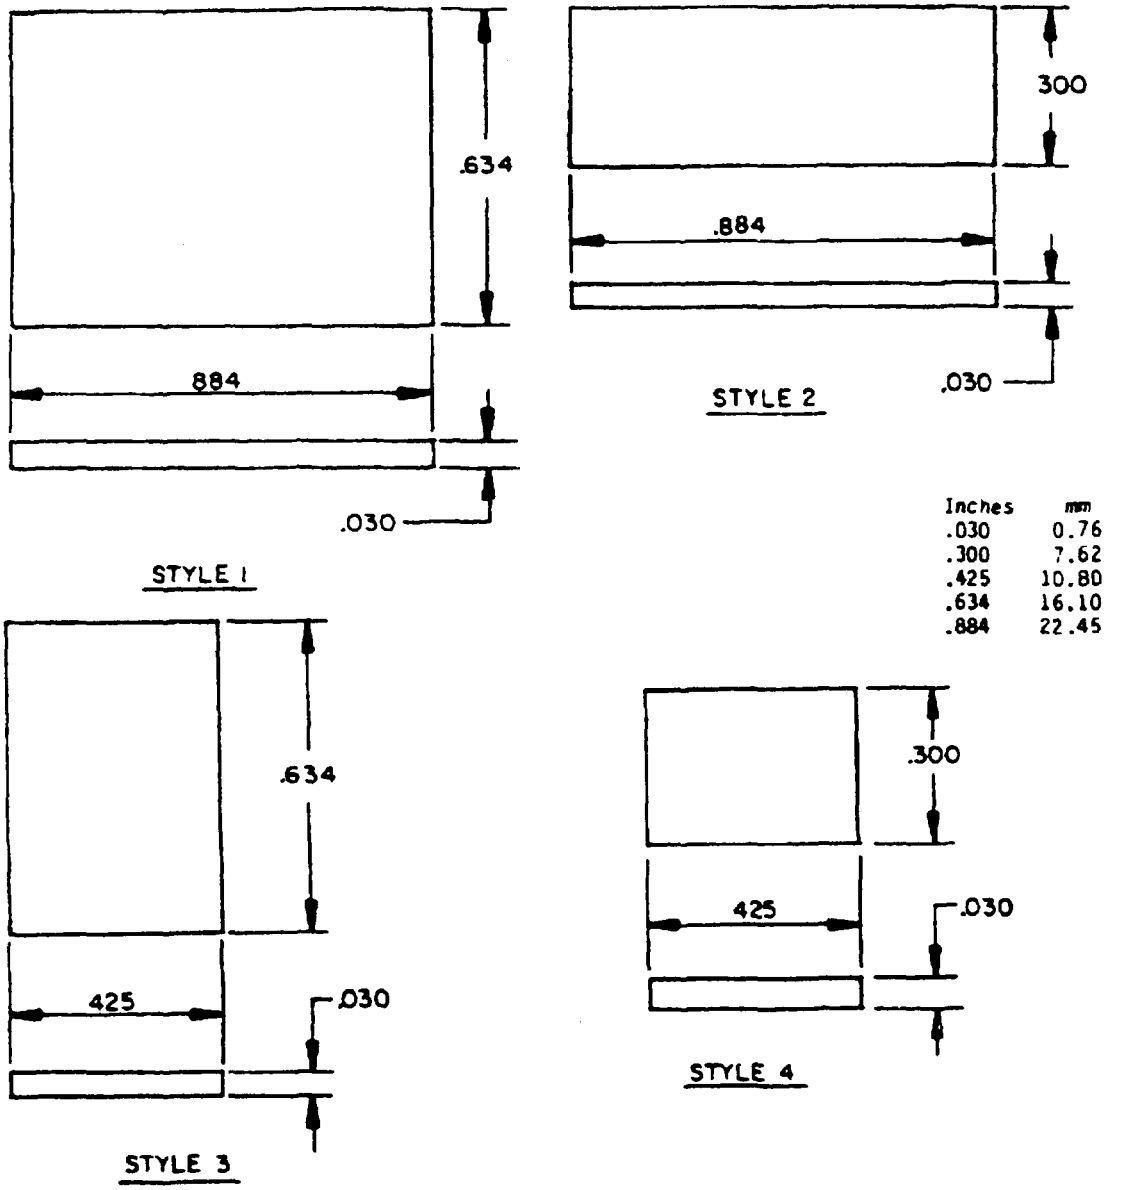


Inches	mm
.030	0.76
.300	7.62
.425	10.80
.634	16.10
.884	22.45

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. For clarification of style see table I.
5. For part number and color see table II.

FIGURE 4. Display screen, spacer or color filter, type 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

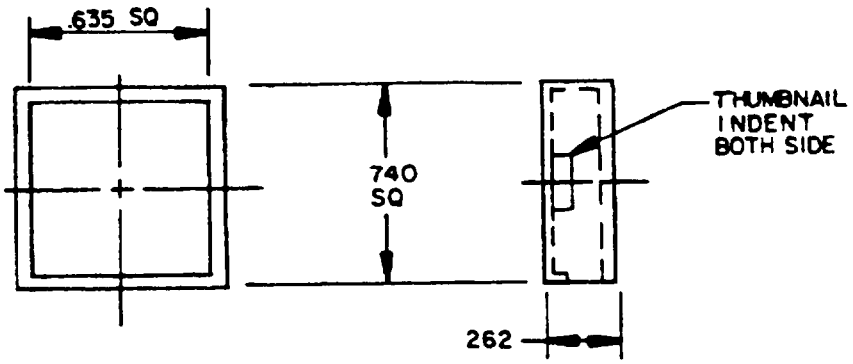


Inches	mm
.262	6.65
.635	16.13
.740	18.80

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. The design configuration is optional within the envelope dimensions known

(B) FIGURE 5. Lens retainer (type 1 unit).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

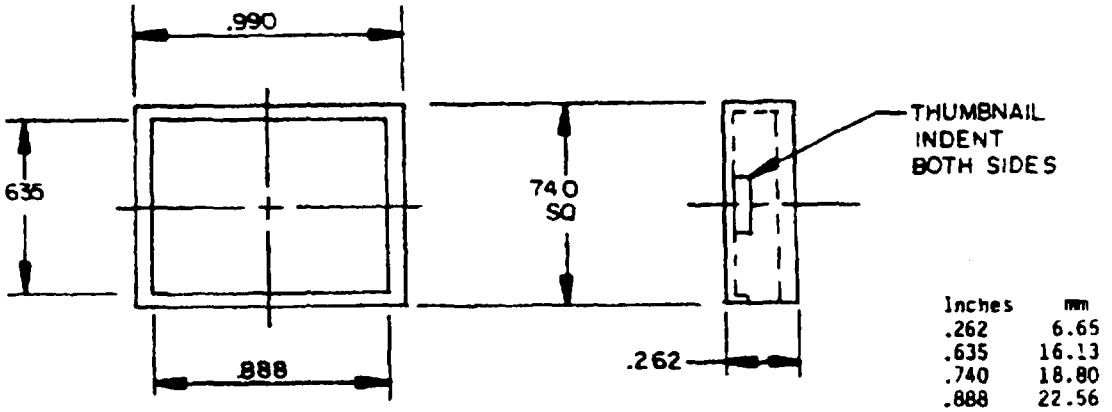


Inches	mm
.262	6.65
.635	16.13
.740	18.80
.888	22.56
.990	25.15

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. The design configuration is optional within the envelope dimensions known.

Ⓑ FIGURE 6. Lens retainer (type 2 unit).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

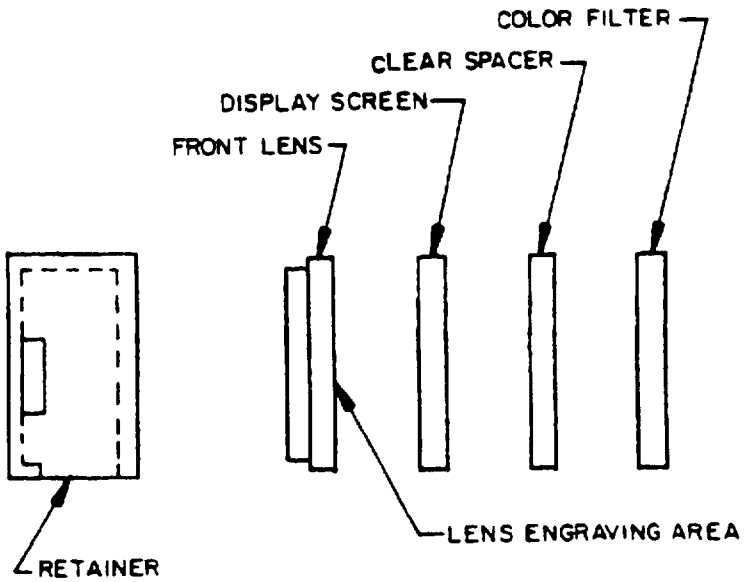

(B) FIGURE 7. Assembly diagram.

TABLE I. Lens configuration.

CODE	DISPLAY AND STYLE NUMBER ARRANGEMENT (LENS ASSY PER FIGURE 7)	
A	FULL	1
B	HORIZONAL SPLIT	2 / 2
C	VERTICAL SPLIT	3 | 3
D	3-WAY SPLIT	4 | 4 / 2
E	3-WAY SPLIT	2 / 4 | 4
F	4-WAY SPLIT	4 | 4 / 4 | 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Intended use As lens for 4-lamp illuminated push switches, MIL-S-22885/80 and MIL-S-22885/74.

Dimensions and configurations See figures 1 through 7 and tables.

Lens assemblies

Code A consists of:
1 - Retainer
1 - Front lens plate
1 - Display screen
1 - Spacer
1 - Color filter

Codes B and C consist of:
1 - Retainer
1 - Display screens
1 - Spacers
1 - Color filters

Codes D and E consist of.
1 - Retainer
1 - Front lens plate
1 - Display screens
1 - Spacers
1 - Color filters

Code F consists of
1 - Retainer
1 - Front lens plate
1 - Display screens
1 - Spacers
1 - Color filters

Characteristics. Lens shall appear white in the unlighted condition In the lighted condition it shall appear in a color determined by the color filter.

Front lens material. High temperature heat resistance thermoplastic. When thermal shock test is performed in accordance with MIL-S-22885, the maximum temperature (nonoperating) shall be 71°C.

Display screen and color filter material: Silicone rubber shall be in accordance with ZZ-R-765.

Spacer material: Silicone rubber shall be in accordance with ZZ-R-765 or high temperature heat resistance thermoplastic.

Color. Color filters shall be in accordance with MIL-S-22885.

Qualification inspection Required as part of the 4-lamp illuminated push switch, M22885/80 or M22885/74.

Part number: M22885/82-(dash number from table II).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. Dash numbers.

Dash number	Lens code (see table I)	Style number (see table I)	Color	Description
Type 1				
-01	All	---	Clear	Front lens plate
-02	A	1	White	Display screen
-03	B, C, D, or E	2 or 3	White	Display screen
-04	A	1	Clear	Spacer
-05	B, C, D, or E	2 or 3	Clear	Spacer
-06	A	1	Blue	Color filter
-07	A	1	Green	Color filter
-08	A	1	Red	Color filter
-09	A	1	White	Color filter
-10	A	1	Yellow	Color filter
-11 1/	A	1	Violet	Color filter
-12	B, C, D, or E	2 or 3	Blue	Color filter
-13	B, C, D, or E	2 or 3	Green	Color filter
-14	B, C, D, or E	2 or 3	Red	Color filter
-15	B, C, D, or E	2 or 3	White	Color filter
-16	B, C, D, or E	2 or 3	Yellow	Color filter
-17 1/	B, C, D, or E	2 or 3	Violet	Color filter
-43	D, E, or F	4	White	Display screen
-44	D, E, or F	4	Clear	Spacer
-45	D, E, or F	4	Blue	Color filter
-46	D, E, or F	4	Green	Color filter
-47	D, E, or F	4	Red	Color filter
-48	D, E, or F	4	White	Color filter
-49	D, E, or F	4	Yellow	Color filter
-50	All	---	---	Retainer
Type 2				
-18	All	---	Clear	Front lens plate
-19	A	1	White	Display screen
-20	B, D, or E	2	White	Display screen
-21	C	3	White	Display screen
-22	A	1	Clear	Spacer
-23	B, D, or E	2	Clear	Spacer
-24	C	3	Clear	Spacer

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. Dash numbers - Continued.

Dash number	Lens code (see table I)	Style number (see table I)	Color	Description
		Type 2		
-25	A	1	Blue	Color filter
-26	A	1	Green	Color filter
-27	A	1	Red	Color filter
-28	A	1	White	Color filter
-29	A	1	Yellow	Color filter
-30 1/	A	1	Violet	Color filter
-31	B, D, or E	2	Blue	Color filter
-32	B, D, or E	2	Green	Color filter
-33	B, D, or E	2	Red	Color filter
-34	B, D, or E	2	White	Color filter
-35	B, D, or E	2	Yellow	Color filter
-36 1/	B, D, or E	2	Violet	Color filter
-37	C	3	Blue	Color filter
-38	C	3	Green	Color filter
-39	C	3	Red	Color filter
-40	C	3	White	Color filter
-41	C	3	Yellow	Color filter
-42 1/	C	3	Violet	Color filter
-51	D, E, or F	4	White	Display screen
-52	D, E, or F	4	Clear	Spacer
-53	D, E, or F	4	Blue	Color filter
-54	D, E, or F	4	Green	Color filter
-55	D, E, or F	4	Red	Color filter
-56	D, E, or F	4	White	Color filter
-57	D, E, or F	4	Yellow	Color filter
-58	All	---	---	Retainer

1/ Inactive for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Preparing activity.
Navy - EC

Agent:
DLA - ES

(Project 5930-N674)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.