INCH-POUND
MIL-PRF-22885/82D
22 April 2022
SUPERSEDING
MIL-PRF-22885/82C
1 March 2001


PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED,

LENS ASSEMBLIES FOR, .665 SQ AND .916 LG x .665 WIDE

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the indicator lights described herein shall consist of this specification sheet and MIL-PRF-22885.

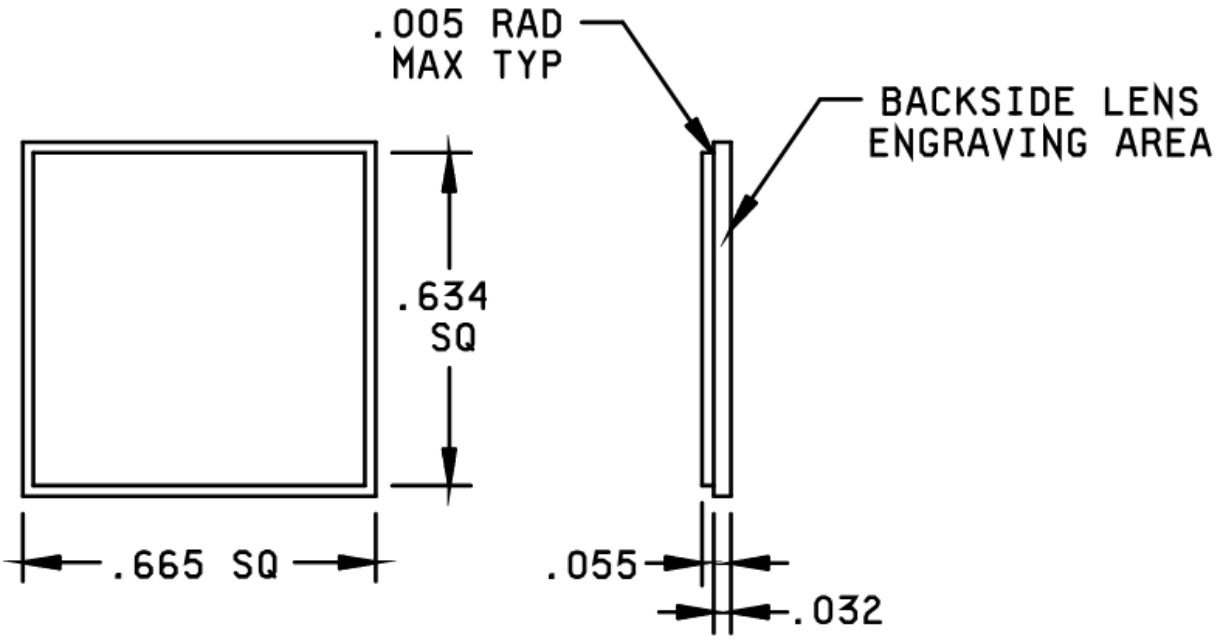


NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005.

FIGURE 1. Front lens plate, type 1.

AMSC N/A
FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

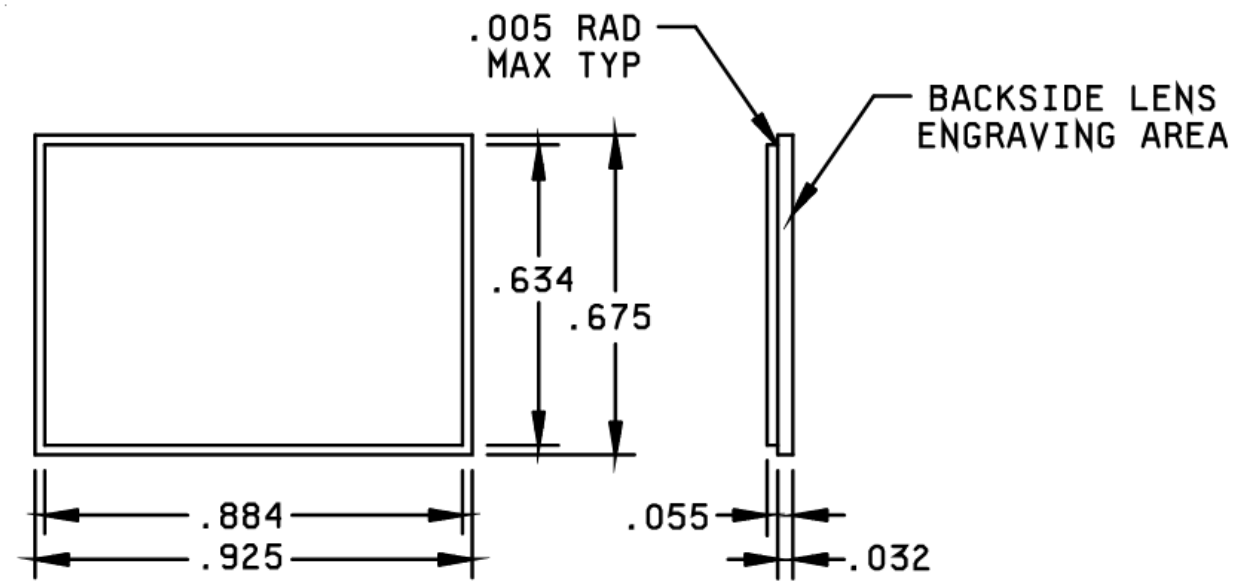

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005.

FIGURE 2. Front lens plate, type 2.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

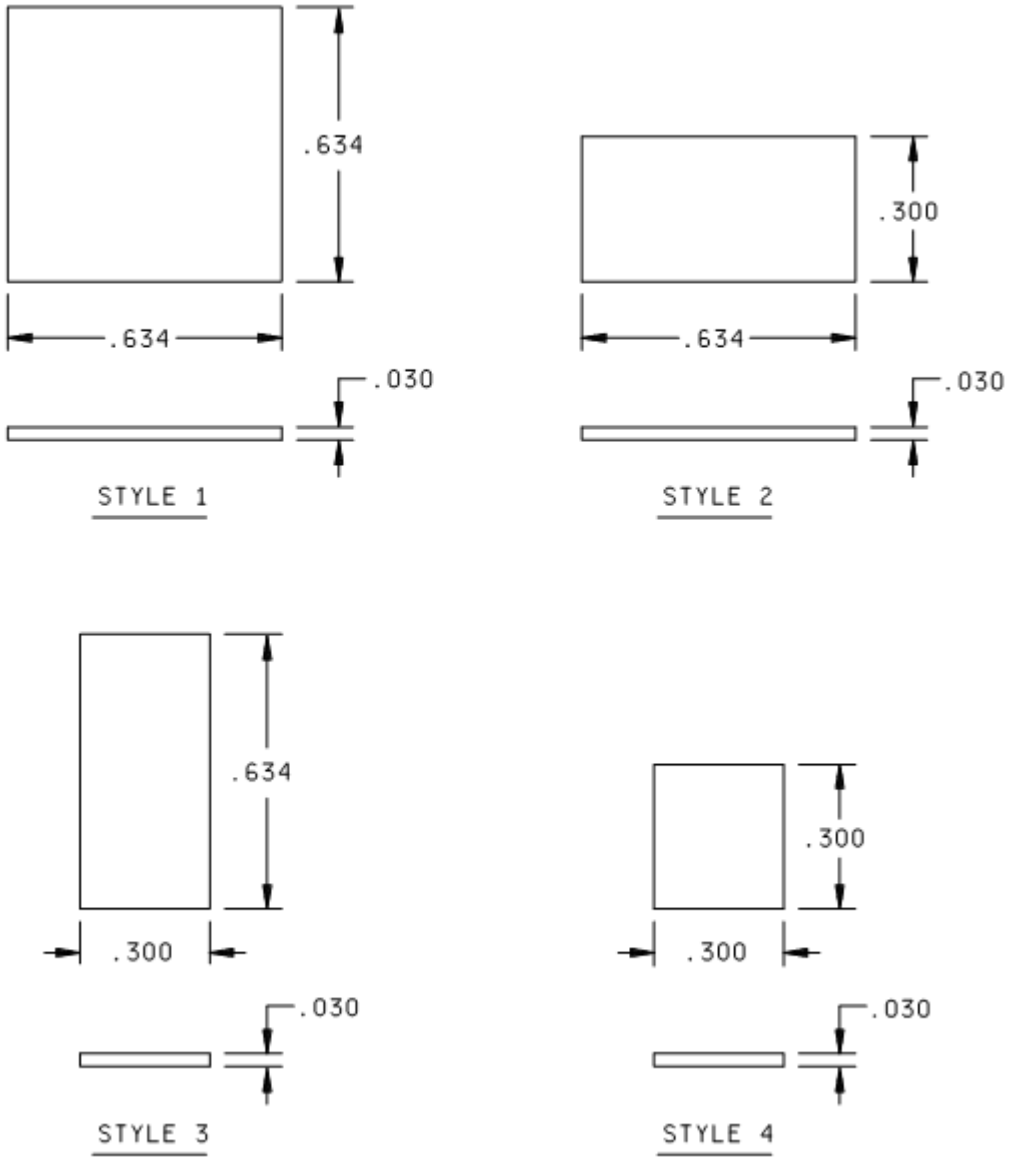

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005.
3. For clarification of style see table I.
4. For part number and color see table II.

FIGURE 3. Display screen, spacer or color filter, type 1.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

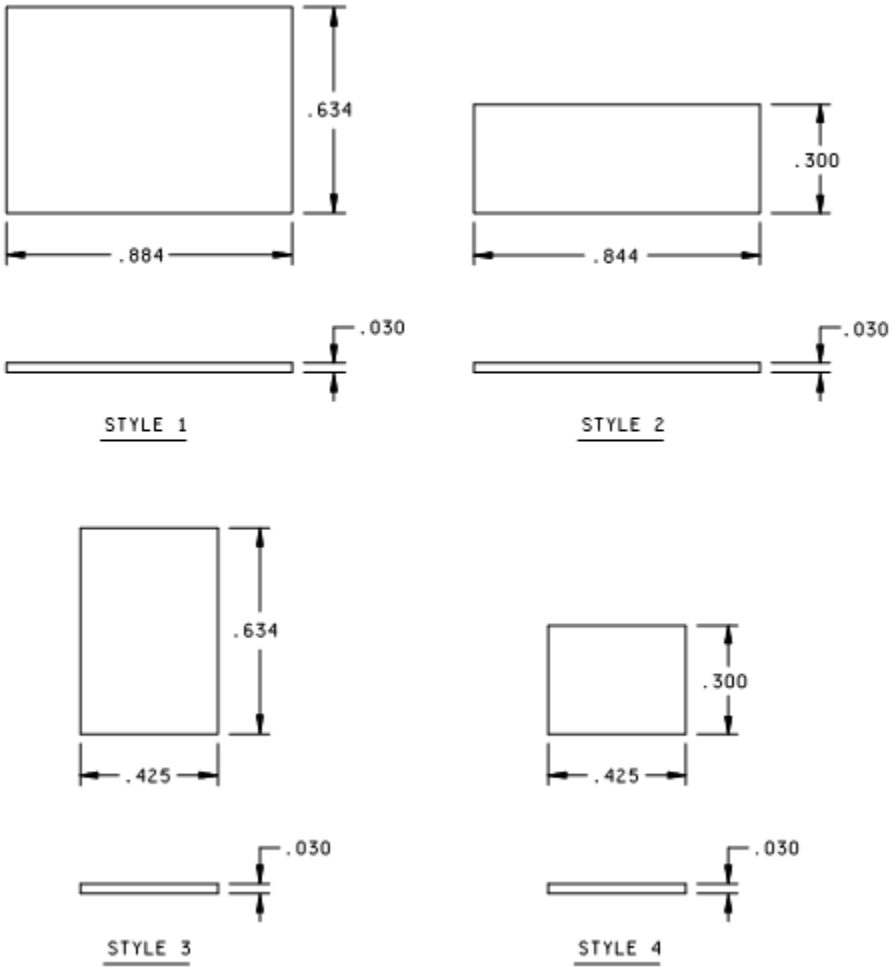

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005.
3. For clarification of style see table I.
4. For part number and color see table II.


FIGURE 4. Display screen, spacer or color filter, type 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

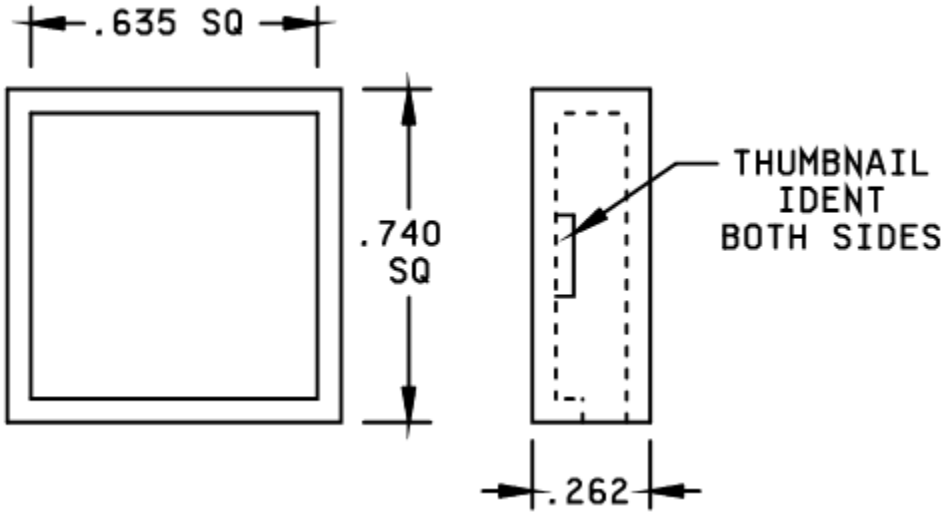

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010.
3. The design configuration is optional within the envelope dimensions known.

FIGURE 5. Lens retainer (type 1 unit).

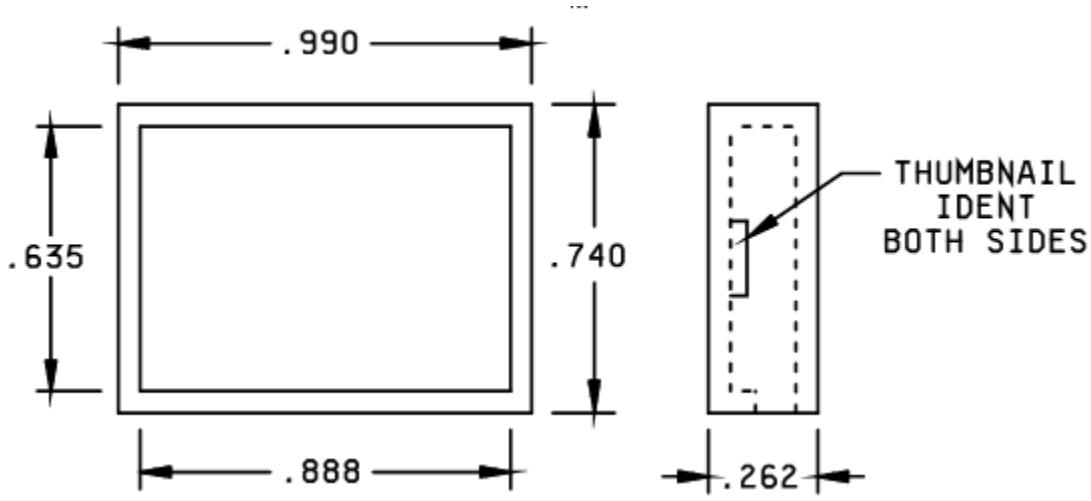

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010.
3. The design configuration is optional within the envelope dimensions known.

FIGURE 6. Lens retainer (type 2 unit).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

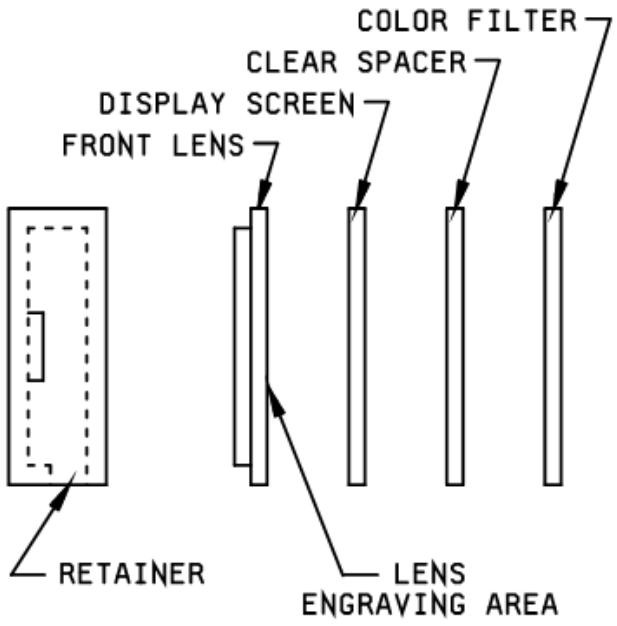


FIGURE 7. Assembly diagram.

TABLE I LENS CONFIGURATION

CODE	DISPLAY AND STYLE NUMBER ARRANGEMENT (LENS ASSY PER FIGURE 7)	
A	FULL	1
B	HORIZONTAL SPLIT	2 / 2
C	VERTICAL SPLIT	3 | 3
D	3-WAY SPLIT	4 | 4 / 2
E	3-WAY SPLIT	2 / 4 | 4
F	4-WAY SPLIT	4 | 4 / 4 | 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Intended use: As lens for 4-lamp illuminated push switches, MIL-PRF-22885/80 and MIL-PRF-22885/74.

Dimensions and configuration: See figures 1 through 7 and tables.

Lens assemblies:

Code A consists of:
- 1 - Retainer
- 1 - Front lens plate
- 1 - Display screen
- 1 - Spacer
- 1 - Color filter

Codes B and C consist of:
- 1 - Retainer
- 1 - Display screens
- 1 - Spacers
- 1 - Color filters

Codes D and E consist of:
- 1 - Retainer
- 1 - Front lens plate
- 1 - Display screens
- 1 - Spacers
- 1 - Color filters

Code F consists of:
- 1 - Retainer
- 1 - Front lens plate
- 1 - Display screens
- 1 - Spacers
- 1 - Color filters

Characteristics: Lens shall appear white in the unlighted condition. In the lighted condition it shall appear in a color determined by the color filter.

Front lens material: High temperature heat resistance thermoplastic. when thermal shock test is performed in accordance with MIL-PRF-22885, the maximum temperature (nonoperating) shall be 71°C.

Display screen and color filter material: Shall be selected to enable the switch to meet the performance requirements of this document.

Spacer material: Shall be selected to enable the switch to meet the performance requirements of this document.

Color: Color filters shall be in accordance with MIL-PRF-22885

Qualification inspection: Required as part of the 4-lamp illuminated push switch, M22885/80 per MIL-PRF-22885/80 or M22885/74 per MIL-PRF-22885/74.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

Part number: M22885/82-(dash number from table II).

TABLE II. Dash numbers.

Type 1				
Dash number	Lens code (see table I)	Style number (see table I)	Color	Description
-01	All	---	Clear	Front lens plate
-02	A	1	White	Display screen
-03	B, C, D, or E	2 or 3	White	Display screen
-04	A	1	Clear	Spacer
-05	B, C, D, or E	2 or 3	Clear	Spacer
-06	A	1	Blue	Color filter
-07	A	1	Green	Color filter
-08	A	1	Red	Color filter
-09	A	1	White	Color filter
-10	A	1	Yellow	Color filter
-11 1/	A	1	Violet	Color filter
-12	B, C, D, or E	2 or 3	Blue	Color filter
-13	B, C, D, or E	2 or 3	Green	Color filter
-14	B, C, D, or E	2 or 3	Red	Color filter
-15	B, C, D, or E	2 or 3	White	Color filter
-16	B, C, D, or E	2 or 3	Yellow	Color filter
-17	B, C, D, or E	2 or 3	Violet	Color filter
-43	D, E, or F	4	White	Display screen
-44	D, E, or F	4	Clear	Spacer
-45	D, E, or F	4	Blue	Color filter
-46	D, E, or F	4	Green	Color filter
-47	D, E, or F	4	Red	Color filter
-48	D, E, or F	4	White	Color filter
-49	D, E, or F	4	Yellow	Color filter
-50	All	---	---	Retainer
Type 2				
-18	All	---	Clear	Front lens plate
-19	A	1	White	Display screen
-20	B, D, or E	2	White	Display screen
-21	C	3	White	Display screen
-22	A	1	Clear	Spacer
-23	B, D, or E	2	Clear	Spacer
-24	C	3	Clear	Spacer

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

TABLE II. Dash numbers - Continued.

Dash number	Lens code (see table I)	Style number (see table I)	Color	Description
Type 2				
-25	A	1	Blue	Color filter
-26	A	1	Green	Color filter
-27	A	1	Red	Color filter
-28	A	1	White	Color filter
-29	A	1	Yellow	Color filter
-30 1/	A	1	Violet	Color filter
-31	B, D, or E	2	Blue	Color filter
-32	B, D, or E	2	Green	Color filter
-33	B, D, or E	2	Red	Color filter
-34	B, D, or E	2	White	Color filter
-35 1/	B, D, or E	2	Yellow	Color filter
-36	B, D, or E	2	Violet	Color filter
-37	C	3	Blue	Color filter
-38	C	3	Green	Color filter
-39	C	3	Red	Color filter
-40	C	3	White	Color filter
-41	C	3	Yellow	Color filter
-42 1/	C	3	Violet	Color filter
-51	D, E, or F	4	White	Display screen
-52	D, E, or F	4	Clear	Spacer
-53	D, E, or F	4	Blue	Color filter
-54	D, E, or F	4	Green	Color filter
-55	D, E, or F	4	Red	Color filter
-56	D, E, or F	4	White	Color filter
-57	D, E, or F	4	Yellow	Color filter
-58	All	4	---	Retainer

1/ Inactive for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.

Reference documents:
MIL-PRF-22885 MIL-PRF-22885/80 MIL-PRF-22885/74

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - EC
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2022-039)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:26Z
Check the source to verify that this is the current version before use.