NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-22885/85C
29 May 1981
SUPERSEDING
MIL-S-22885/85B
10 July 1975

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED, LENS PLATE FOR, 1.030 LONG X .730 WIDE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the lens plate described herein shall consist of this document and the latest issue of Specification MIL-S-22885.

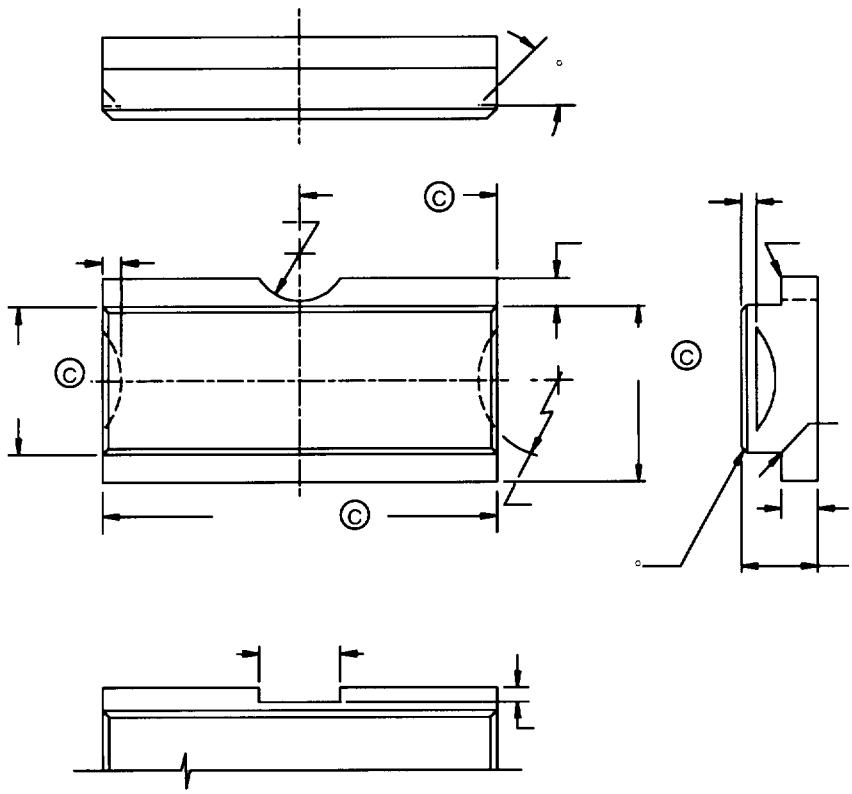


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for decimals and ±2° on angles.
4. Metric equivalents are in parentheses.

FIGURE 1. Transparent front lens plate, narrow face, M22885/85-01.

© denotes changes

FSC 5930


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:27Z
Check the source to verify that this is the current version before use.

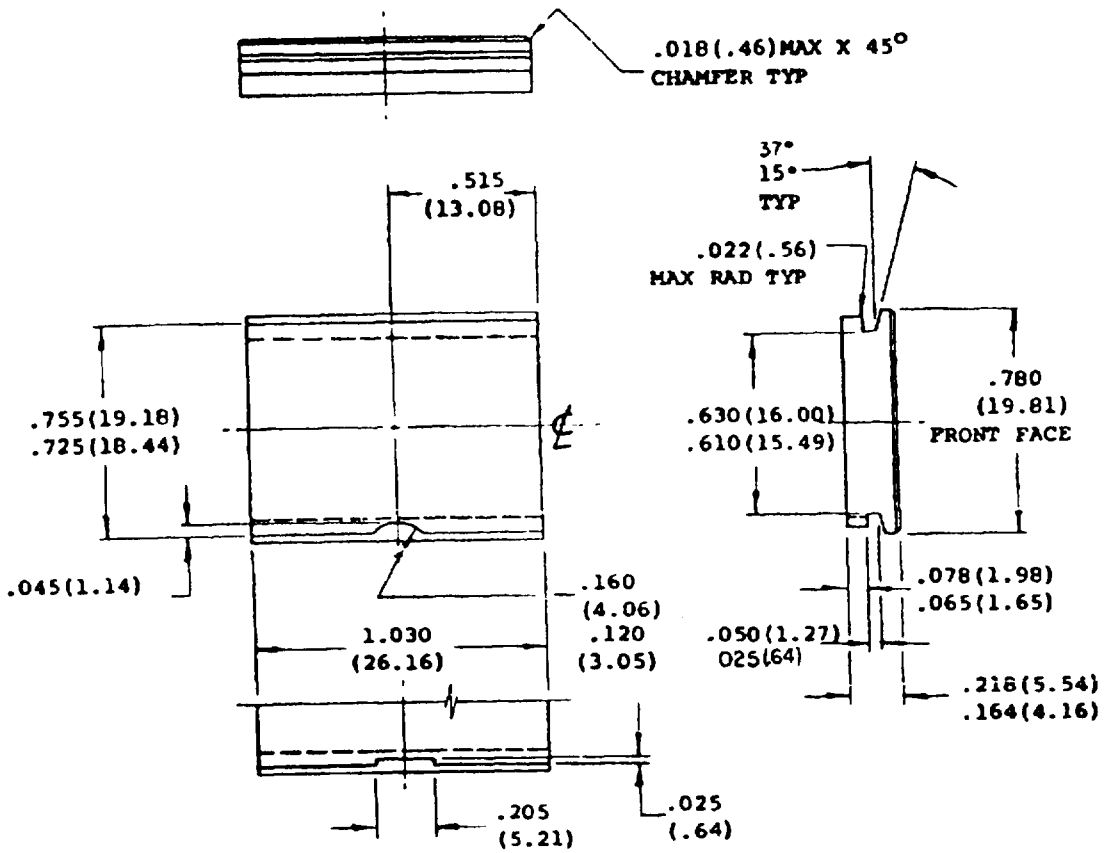

NOTES:
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm
3. Unless otherwise specified, tolerances are ± .005 (.13 mm) for decimals and ±2° on angles
4. Metric equivalents are in parentheses.

FIGURE 2. Transparent front lens plate, extended face, M22885/85-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:27Z
Check the source to verify that this is the current version before use.

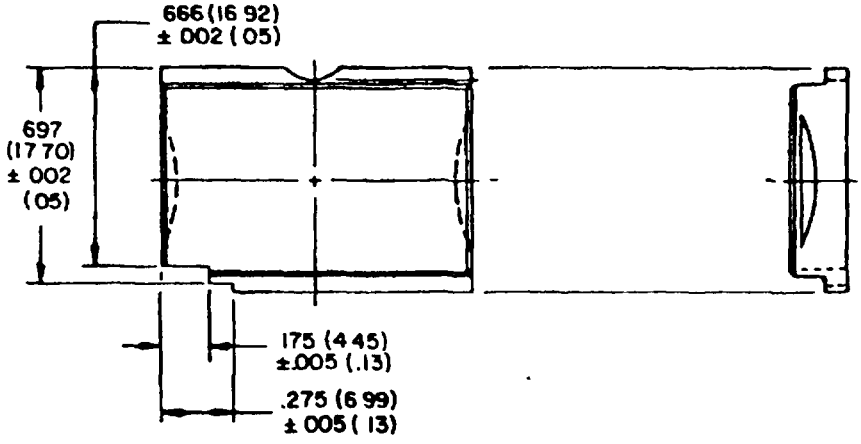

NOTES
1. Dimensions are in inches
2 Dimensions and configuration are identical to that of figure 1 except for cut-out as shown.
3 Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm
4 Metric equivalents are in parentheses.

FIGURE 3. Transparent front lens plate, narrow face with cut-out, M22885/85-03

Source: https://assist.dla.mil - Downloaded: 2026-10-19T14:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figures 1, 2, and 3

© Material High temperature heat resistant, thermoplastic When thermal shock test is performed in accordance with MIL-S-22885, the maximum temperature shall be 71°C (+55°C with lamps energized) Molded clear polycarbonate in accordance with L-P-393 may be used

Intended use As front lens plate to be used in conjunction with a translucent white diffuser on switch/indicators specified in table I

Lens transmittance Lens plate shall be transparent. When assembled to the switch or indicator, a translucent white background is provided by the diffuser. When illuminated, the background shall appear in a color determined by the color of the lamp filters (MIL-S-22885/12). The lens style, as shown in table I of MIL-S-22885/10, is provided by the diffuser.

© Qualification Required as part of the 4-lamp illuminated push button switch, MIL-S-22885/9 or MIL-S-22885/87.

TABLE I Part numbers

Part number	Description	Switch/indicator 1/ © reference
M22885/85-01	Narrow face	MIL-S-22885/9, 10
M22885/85-02	Extended face	MIL-S-22885/9, 10
M22885/85-03	Narrow face with cut-out	MIL-S-22885/87

1/ Lens plate will be accommodated by the switch/indicators listed.

Custodians
Army - FR
Navy - EC
Air Force - 85

Review activities
Army - MI, AV
Navy - AS
Air Force - 17, 99
DLA - ES

User activities
Army - AR
Navy - MC, SH, OS
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-1162)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:27Z
Check the source to verify that this is the current version before use.