
INCH-POUND
MIL-PRF-22885/85E
22 April 2022
SUPERSEDING
MIL-PRF-22885/85D
1 March 2001

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED, LENS PLATE FOR, 1.030 LONG X .730 WIDE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-PRF-22885

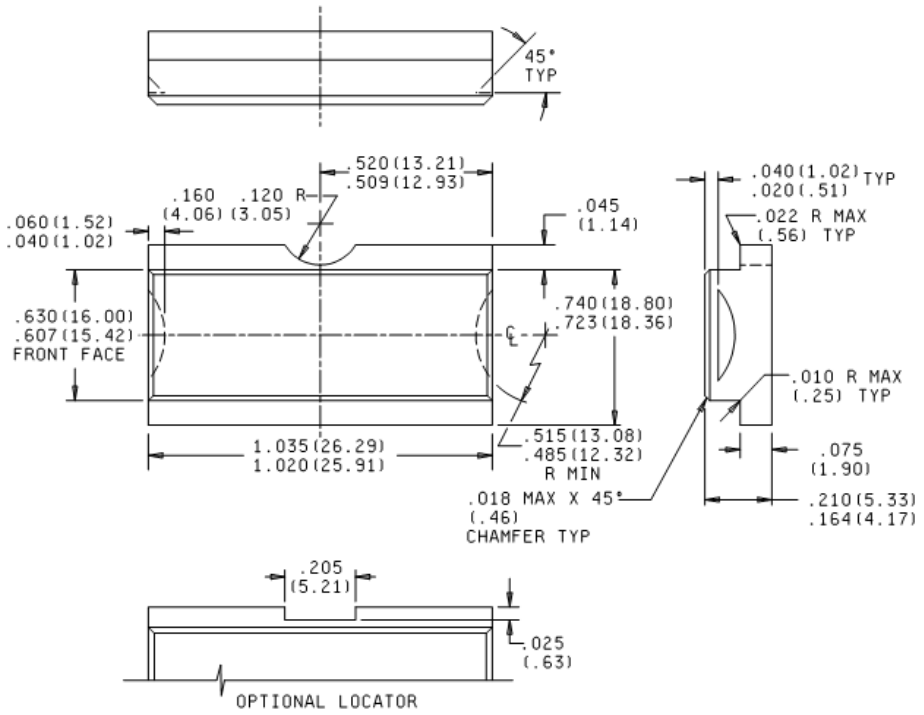


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for decimals and ±2° on angles.
4. Metric equivalents are in parentheses.

FIGURE 1. Transparent front lens plate, narrow face, M22885/85-01.

AMSC N/A
FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:27Z
Check the source to verify that this is the current version before use.

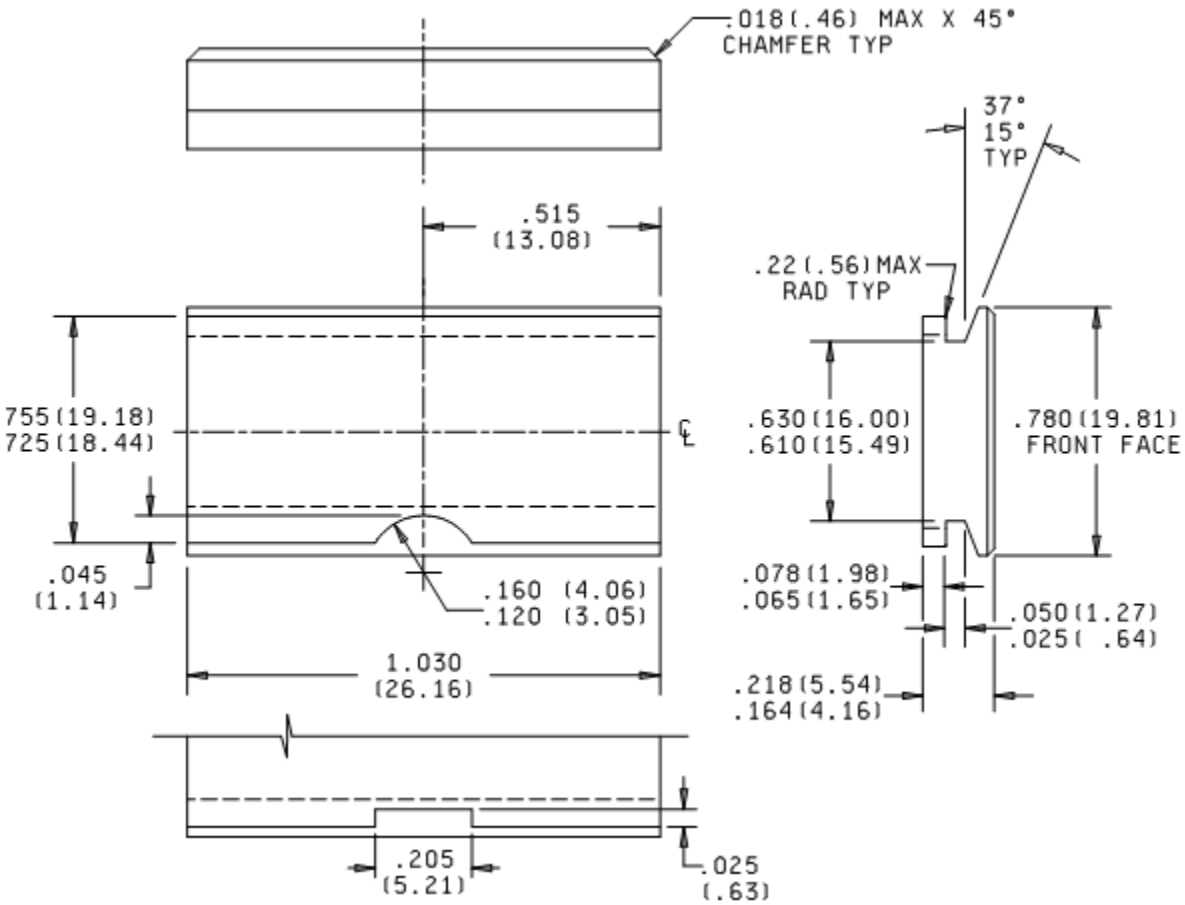


OPTIONAL LOCATOR

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for decimals and ±2° on angles.
4. Metric equivalents are in parentheses.

FIGURE 2. Transparent front lens plate, extended face, M22885/85-02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:27Z
Check the source to verify that this is the current version before use.

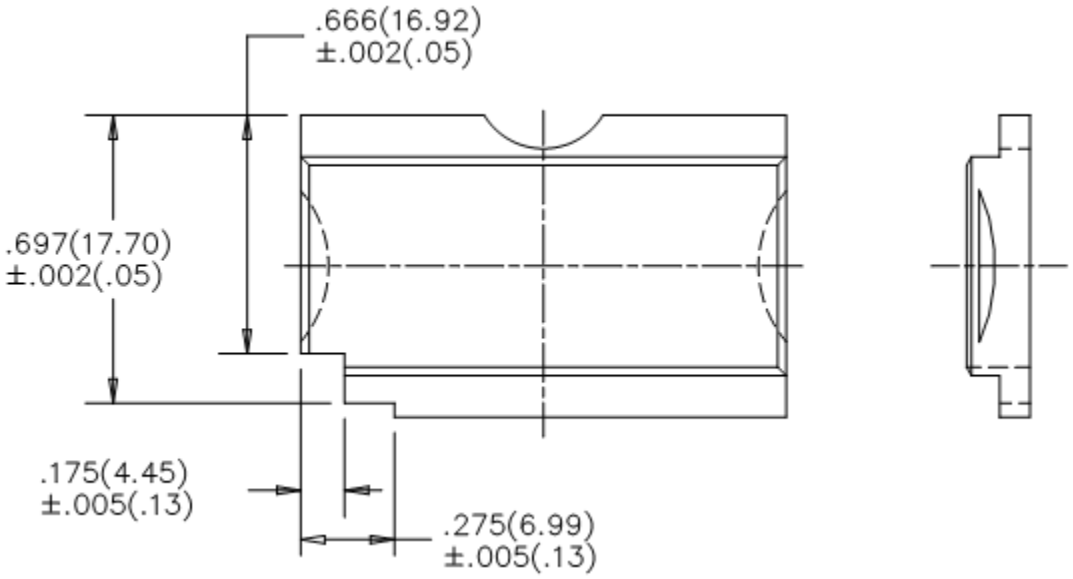

NOTES:
1. Dimensions are in inches.
2. Dimensions and configuration are identical to that of figure 1 except for cut-out as shown.
3. Metric equivalents are given for general information only.
4. Metric equivalents are in parentheses.

FIGURE 3. Transparent front lens plate, narrow face with cut-out. M22885/85-03.

REQUIREMENTS:

Dimensions and configuration: See figures 1, 2, and 3.

Material: High temperature heat resistant, thermoplastic. When thermal shock test is performed in accordance with MIL-PRF-22885, the maximum temperature shall be 71°C (+55°C with lamps energized).

Intended use: As font lens plate to be used in conjunction with a translucent white diffuser on switch/indicators specified in table I.

Lens transmittance: Lens plate shall be transparent. When assembled to the switch or indicator, a translucent white background is provided by the diffuser. When illuminated, the background shall appear in a color determined by the color of the lamp filters (MIL-PRF-22885/12). The lens style, as shown in table I of MIL-PRF-22885/10, is provided by the diffuser.

Qualification: Required as part of the 4-lamp illuminated pushbutton switch, MIL-PRF-22885/9 or MIL-PRF-22885/87.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:27Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers.

Part number	Description	Switch/indicator 1/
M22885/85-01	Narrow face	MIL-PRF-22885/9, 10
M22885/85-02	Extended face	MIL-PRF-22885/9, 10
M22885/85-03	Narrow face with cut-out	MIL-PRF-22885/87

1/ Lens plate will be accommodated by the switch/indicators listed.

The margins of this specification are marked with vertical lines to indicate modifications generated by this revision. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced Documents:
MIL-PRF-22885
MIL-PRF-22885/9
MIL-PRF-22885/10
MIL-PRF-22885/12
MIL-PRF-22885/87

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2022-040)

Review activities:
Army - AR, AV, MI
Navy - AS, MC, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:27Z
Check the source to verify that this is the current version before use.