NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-22885/88B
28 June 1995
SUPERSEDING
MIL-S-22885/88A
14 May 1980

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED,
HIGH IMPACT SHOCK, MODULAR SWITCH ASSEMBLIES FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation:MIL-S-22885.

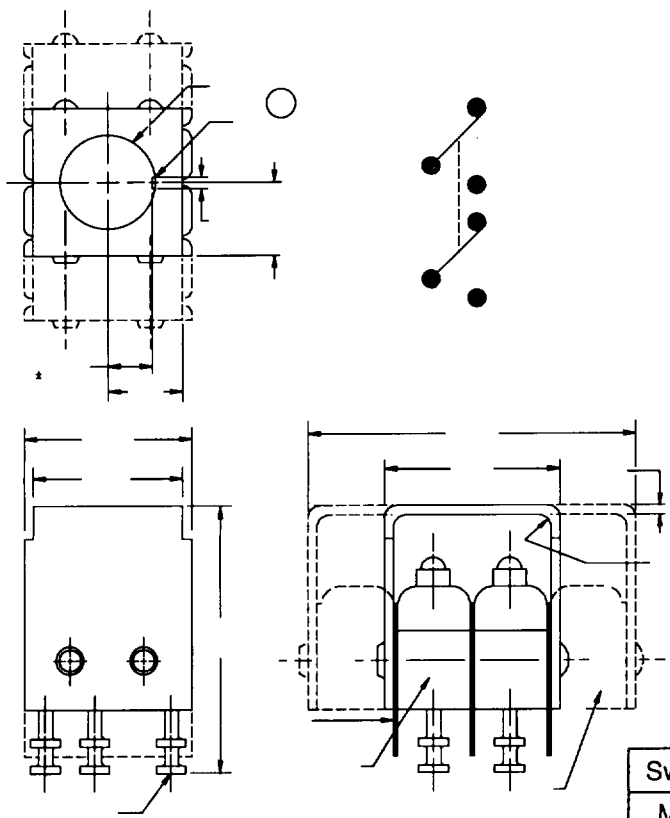

TWO POLE SWITCH ASSEMBLY


Switch action	Dimension "A"
Momentary	1.062 max
Alternate	1.344 max

FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:28Z
Check the source to verify that this is the current version before use.

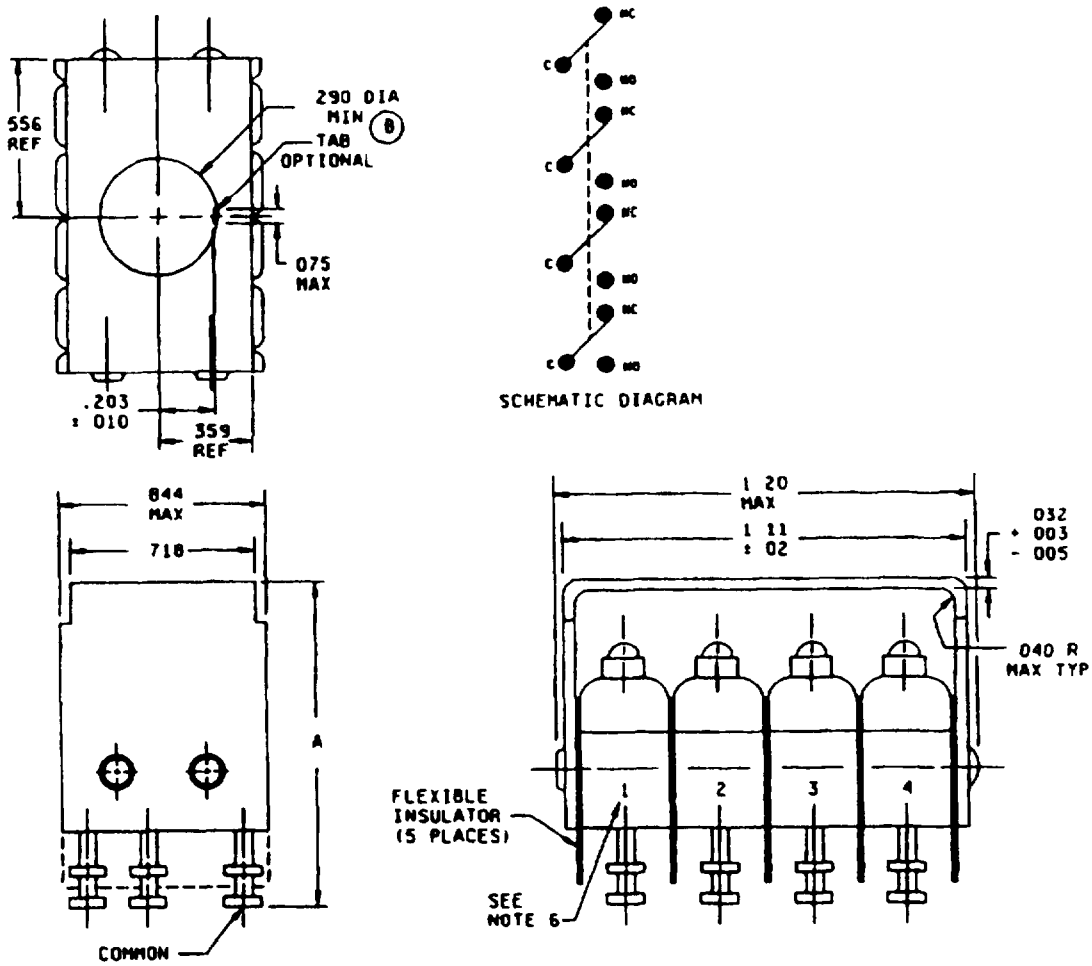

FOUR POLE SWITCH ASSEMBLY

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.003	.01	.032	.81	.290	7.37	.570	14.48	1.11	28.19
.005	.13	.040	1.02	.296	7.52	.718	18.24	1.20	30.48
.010	.25	.075	1.91	.359	9.12	.844	21.44	1.344	34.14
.020	.51	.203	5.16	.556	14.12	1.062	26.97		

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (.41 mm).
3. Metric equivalents are given for general information only.
4. The design configuration is optional within envelope dimensions shown.
5. Flat or cylindrical type terminal design is optional.
6. Basic switch number shall be permanently marked as shown. Additional marking of switch number on opposite side of basic switch is optional.
7. Two pole switch design utilizing two spacers, as shown, is optional.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1. The switch modules shall be capable of mating with indicator lights in accordance with MIL-S-22885/87 to form the MIL-S-22885/87 illuminated push button switch. Basic switch elements shall be permanently fixed to switch bracket or frame.

Enclosure design: 1 (unsealed).

Temperature characteristic: -55°C to +71°C.

Vibration grade: 2 (10-500 Hz, 10 g peak).

Operation: A (momentary action) and B (alternate action).

Material:

Cam actuator: May be thermoplastic material classified as UL94V-2.

Flexible insulators: May be fabricated from woven glass impregnated with TFE.

Weight: 1.2 ounces maximum.

Operating characteristics:

Operating force: Measurement to be taken at front of lens with switch module assembled to indicator light.

2PDT momentary: 4 pounds maximum.

4PDT momentary: 4 pounds maximum.

2PDT alternate: 6 pounds maximum.

4PDT alternate: 7 pounds maximum.

Dielectric withstanding voltage:

Altitude: 50,000 feet.

Electrical endurance: See table I for electrical ratings.

Qualification inspection: Required as part of the four lamp, high impact shock resistant illuminated switch, MIL-S-22885/87.

Part or Identifying Number (PIN): See table II.

TABLE I. Electrical ratings.

Load	Sea level		50,000 feet
	28 V dc	115 V ac	28 V dc
	(Amperes)	(Amperes)	(Amperes)
Resistive	5.0	5.0	5.0
Inductive	3.0	5.0	2.5
Lamp	2.4	1.5	2.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:28Z
Check the source to verify that this is the current version before use.

TABLE II. PIN and characteristics.

PIN	Circuit	Operation
M22885/88-01	2PDT	Momentary
M22885/88-02	4PDT	Momentary
M22885/88-03	2PDT	Alternate
M22885/88-04	4PDT	Alternate

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, AT
Navy - MC, SH
Air Force - 99

Preparing activity:
DLA - ES

(Project 5930-1570)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:28Z
Check the source to verify that this is the current version before use.