
INCH-POUND
MIL-PRF-22885/88D
22 April 2022
SUPERSEDING
MIL-PRF-22885/88C
1 March 2001

PERFORMANCE SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED, HIGH IMPACT SHOCK, MODULAR SWITCH ASSEMBLIES FOR

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the indicator lights described herein shall consist of this specification sheet and MIL-PRF-22885.

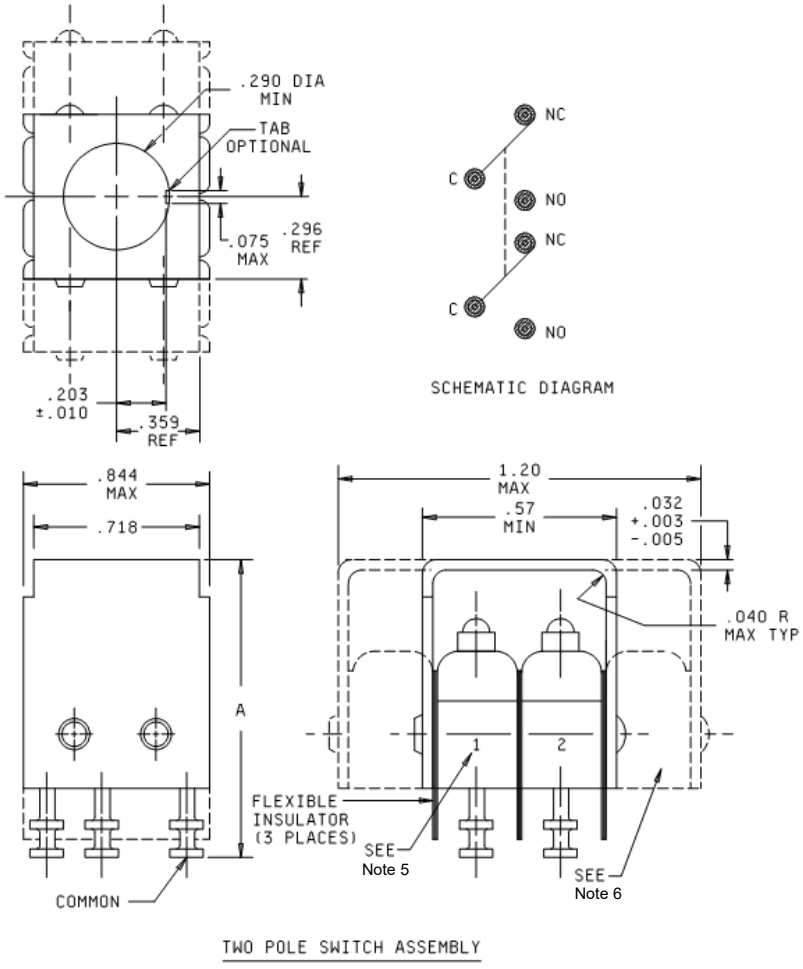


Switch action	Dimension "A"
Momentary	1.062 max
Alternate	1.344 max

FIGURE 1. Dimensions and configurations.

AMSC N/A
FSC 5930

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:28Z
Check the source to verify that this is the current version before use.

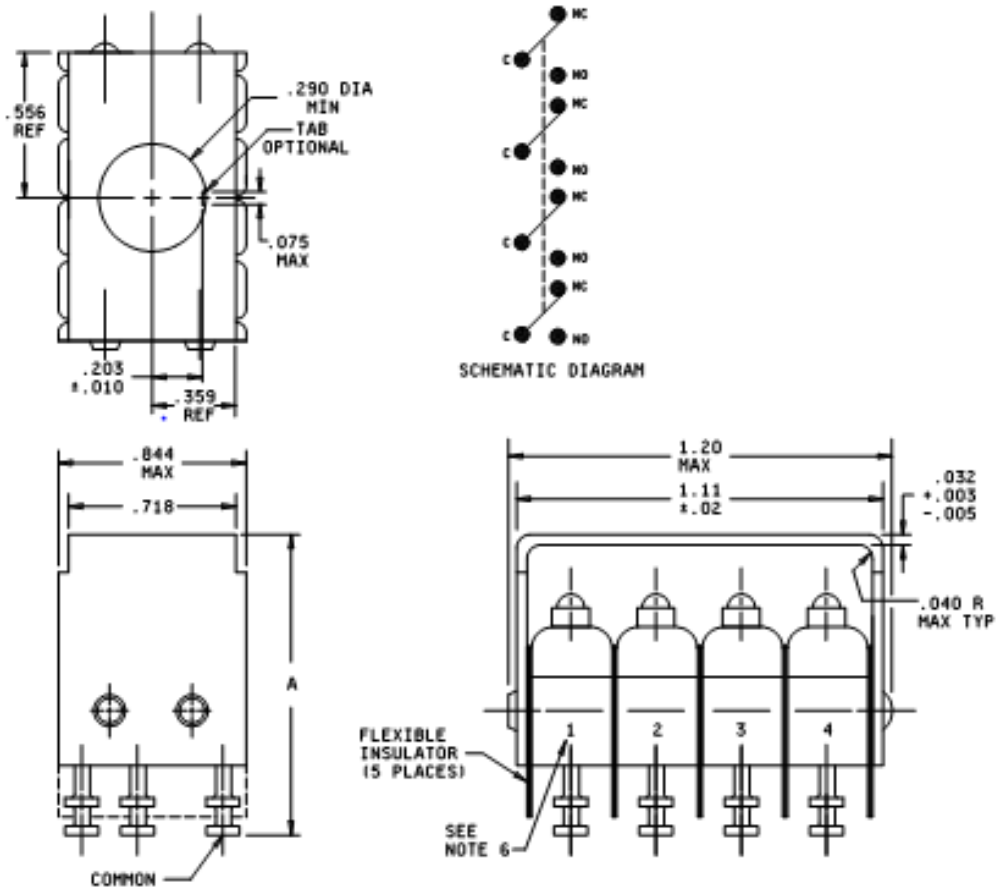

FOUR POLE SWITCH ASSEMBLY

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016
3. The design configuration is optional within envelope dimensions shown.
4. Flat or cylindrical type terminal design is optional.
5. Basic switch number shall be permanently marked as shown. Additional marking of switch number on opposite side of basic switch is optional.
6. Two pole switch design utilizing two spacers, as shown, is optional.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:28Z
Check the source to verify that this is the current version before use.

Requirements:

Dimensions and configuration: See figure 1. the switch modules shall be capable of mating with indicator lights in accordance with MIL-PRF-22885/87 to form the MIL-PRF-22885/87 illuminated push button switch. Basic switch elements shall be permanently fixed to switch bracket or frame.

Enclosure design: 1 (unsealed).

Temperature characteristic: -55°C to +71°

Vibration grade: 2 (10-500 Hz, 10 g peak).

Operation: A (momentary action) and B (alternate action).

Material:

Cam actuator: May be thermoplastic material classified as UL94V-2.

Flexible insulators: May be fabricated from woven glass impregnated with TFE.

Weight: 1.2 ounces maximum.

Operating characteristics:

Operating force: Measurement to be taken at front of lens with switch module assembled to indicator light.

2PDT momentary: 4 pounds maximum.

4PDT momentary: 4 pounds maximum.

2PDT alternate: 6 pounds maximum.

4PDT alternate: 7 pounds maximum.

Dielectric withstanding voltage:

Altitude: 50,000 feet.

Electrical endurance: See table I for electrical ratings.

Qualification inspection: Required as part of the four lamp, high impact shock resistant illuminated switch, MIL-PRF-22885/87.

Part or Identifying Number (PIN): See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:28Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings.

Load	Sea level		50,000 feet
	28 V dc	115 V ac	28 V dc
	(amperes)	(amperes)	(amperes)
Resistive	5.0	5.0	5.0
Inductive	3.0	5.0	2.5
Lamp	2.4	1.5	2.4

TABLE II. Pin and characteristics.

PIN	Circuit	Operation
M22885/88-01	2PDT	Momentary
M22885/88-02	4PDT	Momentary
M22885/88-03	2PDT	Alternate
M22885/88-04	4PDT	Alternate

Referenced documents:
MIL-PRF-22885
MIL-PRF-22885/87
UL94

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5930-2022-042)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:28Z
Check the source to verify that this is the current version before use.