S-F-571D
9 May 1985
SUPERSEDING
S-F-571C
December 21, 1971

FEDERAL SPECIFICATION

FORGES, COAL BURNING, PORTABLE AND STATIONARY, MANUAL AND POWER OPERATED

This specification is approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers portable and stationary coal burning forges that are manual and power operated.

1.2 Classification.

1.2.1 Types. Forges furnished under this specification shall be of the following types, as specified (see 6.2):

Type I	-	Deleted.
Type II	-	Portable, round, nominal hearth area 450 square inch, nominal depth five inches, steel, windshield, and manual blower.
Type III	-	Portable, round, nominal hearth area 250 square inch, nominal depth five inches, steel, windshield, and compressed air blower.
Type IV	-	Portable, knockdown type, rectangular, nominal hearth area 300 square inch, nominal depth seven inches, and manual blower.
Type V	-	Portable, rectangular, nominal hearth area 700 square inch, nominal depth three inches, steel, windshield or half hood, and manual blower.
Type VI	-	Portable, rectangular, nominal hearth area 1,500 square inch, nominal depth three inches, cast iron, half hood, water tank and coal box, and manual blower.
Type VII	-	Deleted.
Type VIII	-	Deleted.
Type IX	-	Stationary, round, nominal hearth area 1,000 square inch, nominal depth five inches, steel or cast iron, with canopy hood and telescopic vent pipe, water tank and coal box, and electric blower.
Type X	-	Stationary, round, nominal hearth area 1,800 square inch, nominal depth five inches, steel or cast iron, with canopy hood and telescopic vent pipe, water tank and coal box, and electric blower.

FSC 3424

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

Type XI	-	Deleted.
Type XII	-	Deleted.
Type XIII	-	Stationary, rectangular, nominal hearth area 1,600 square inch, nominal depth seven inches, steel or cast iron, with canopy hood and telescopic vent pipe, water tank and coal box, and electric blower.
Type XIV	-	Stationary, square, nominal hearth area 2,800 square inch, nominal depth eight inches, steel or cast iron, with canopy hood and telescopic vent pipe, water tank and coal box, and electric blower.

2. APPLICABLE DOCUMENTS

2.1 Government publications. The issues of the following documents, in effect on date of invitation for bids or solicitation for offers, form a part of this specification to the extent specified herein.

Federal Specifications

J-C-30	-	Cable and Wire, Electrical, (Power, Fixed Installation)
W-C-596	-	Connector, Electrical, Power, General Specification for
W-C-596/11	-	Connector, Receptical, Electrical, General Purpose, Single, General Grade, Grounding, 2 Pole, 3 Wire, 15 Amperes, 125 Volts, 50/60 Hertz
CC-M-1807	-	Motors, Alternating Current, Fractional and Integral Horsepower (500 HP and Smaller)

Federal Standards

FED-STD-H28	-	Screw-Thread Standards for Federal Services
FED-STD-123	-	Marking for Shipment (Civil Agencies)

(Activities outside the Federal Government may obtain copies of Federal specifications, standards, and commercial item descriptions as outlined under General Information in the Index of Federal Specifications, Standards and Commercial Item Descriptions. The Index, which includes cumulative bimonthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Single copies of this specification, and other Federal specifications and commercial item descriptions required by activities outside the Federal Government for bidding purposes, are available without charge from General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Houston, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.)

(Federal Government activities may obtain copies of Federal standardization documents and the Index of Federal Specifications, Standards, and Commercial Item Descriptions from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

Military Specifications

MIL-T-152 - Treatment, Moisture and Fungus-Resistant, of Communications, Electronic, and Associated Electrical Equipment
MIL-V-173 - Varnish, Moisture-and-Fungus-Resistant (For Treatment of Communications, Electronic, and Associated Equipment)
MIL-F-3296 - Forges, Furnaces and Ovens (Exclusive of Space Heating and Cooking), Packaging of

Military Standards

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-130 - Identification Marking of US Military Property
MIL-STD-889 - Dissimilar Metals

(Copies of military specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Federal Regulation:

Occupational Health and Safety Administration (OSHA) 29 CFR 1910.211-222
General Industrial Safety and Health Standards

(The Code of Federal Regulations (CFR) and the Federal Register (FR) are for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. When indicated, reprints of certain regulations may be obtained from the Federal agency responsible for issuance thereof.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Gear Manufacturers' Association (AGMA)

AGMA 360.02 - Manual for Machine Tool Gearing
AGMA 390.03 - Gear Handbook, Volume 1, Gear Classification, Materials, and Measuring Methods for Unassembled Gears

(Application for copies should be addressed to the American Gear Manufacturers' Association, 1901 N. Fort Myer Dr., Arlington, VA 22209.)

American Society for Testing and Materials (ASTM)

ASTM D3951-82 - Standard Practice for Commercial Packaging
ASTM E380-84 - Standard for Metric Practice

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

American Society of Mechanical Engineers (ASME)

ASME PTC 11 - Fans

(Application for copies should be addressed to the American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, NY 10017.)

International Organization for Standardization (ISO)

ISO 54 - Cylindrical Gears for General Engineering and for Heavy Engineering - Modules and Diametral Pitches
ISO 1122/1 - Glossary of Gear Terms - Part 1: Geometrical Definitions

(Application for copies of ISO documents should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

National Electrical Manufacturers' Association (NEMA)

NEMA ICS 1 - General Standards for Industrial Control and Systems

(Applications for copies should be addressed to the National Electrical Manufacturers' Association, 2101 L Street, NW, Washington, DC 20037.)

National Fire Protection Association (NFPA)

NFPA 70 - National Electrical Code

(Application for copies should be addressed to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269.)

Underwriters' Laboratories (UL)

UL 73 - Motor Operated Appliances

(Application for copies should be addressed to the Underwriters' Laboratories, 333 Pfingsten Road, North Brook, IL 60062.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the contractor shall furnish one complete forge for first article inspection. The first article may be either a preproduction model or an initial production item which conforms to the requirements of this specification. In either case, the approved first article and the production items shall be identical and in accordance with the terms of the contract. Approval of the first article shall not relieve the contractor of the responsibility to furnish equipment in accordance with the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

3.2 Design. The forges shall be new and of the manufacturer's latest design which shall meet the requirements specified herein. The design shall be such that all parts subject to wear, breakage, or distortion shall be accessible for adjustment, repair, or replacement without modification, distortion, or damage to the forge or any forge part or component. The general appearance of the forges shall be as shown in Figures 1 thru 7. These figures are included for convenience of identification and are not intended to preclude purchase of forges which are otherwise in accordance with the requirements of this specification.

3.2.1 Measurement system. The US Customary System of Units (US) or the International System of Units (SI) may be used in the design and construction of the forges. In this specification all measurements, dimensions, sizes and capacities are given in the US system. These measurements may be converted to the SI system by using the conversion factors and methods specified in ASTM E380-84.

3.3 Material. Materials not specifically designated herein or in the contract shall be of a quality commensurate with commercial practice within the producing industry, shall be suitable for the intended purpose in the design of the end item, and shall meet all requirements specified herein. Materials shall be free from defects which would adversely affect the performance or maintainability of the individual components or the overall assembly. When dissimilar metals are used in contact with each other, suitable protection against galvanic corrosion shall be applied in accordance with MIL-STD-889.

3.3.1 Reclaimed materials. The contractor is encouraged to use reclaimed materials for fabricating new parts without jeopardizing the chemical and physical properties, design integrity, and intent of the materials originally selected or specified. The reclaimed materials shall have been reprocessed, remanufactured, or recycled in a manner that shall restore them to the same chemical composition and physical properties as the materials originally selected for use. It shall not be permissible to use reclaimed parts as is, or rebuilt from scrap or other used equipment.

3.4 Construction. Parts used in fabrication of the forge shall be new and free of defects. Part surfaces shall be clean and free of extraneous materials. External surfaces shall be smooth and free of sharp edges. Screws, pins, bolts, and similar parts shall be installed with means to prevent loss of tightness and adjustment. Parts subject to adjustment or removal shall not be swaged, peened, staked, or otherwise deformed. Construction of the forge shall be rugged and sturdy, and indicative of equipment produced by manufacturers normally involved in producing this type of equipment.

3.4.1 Castings and forgings. Castings shall be free from blowholes, porosity, hard spots, shrinkage defects, cracks, or other defects. Forgings shall be free from scale, inclusions, cold shuts, mismatching, sharp edges, or other defects. Castings and forgings shall be free from any properties adversely affecting their strength, durability, or suitability. Reclaiming or repair of major castings and forgings shall be permitted if the repair is not on a critical surface.

3.4.2 Welding, brazing, and soldering. Welding, brazing, and soldering shall be of a quality which shall sustain all requirements of the welded, brazed, or soldered parts. These operations shall not be employed as repair measures for defective parts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

3.4.3 Electrical components. Electrical components shall conform to, and be located in accordance with, NFPA 70 and NEMA ICS 1, as applicable.

3.4.4 Electrical connections. Connections to screw-type terminals shall be mechanically secured with means to prevent loss of tightness. All other electrical connections shall be mechanically secured and soldered or brazed. Only rosin base fluxes shall be used in all soldering operations.

3.4.5 Lubrication. All bearings (except sealed-for-life type), mating gears, and sliding parts shall be provided with standard means for lubrication. Oil holes, grease fittings, and filler caps shall be accessible without requiring disassembly of functional parts. Lubrication reservoirs, if applicable, shall have means for checking levels.

3.4.6 Interchangeability. All parts shall be manufactured to definite standards, clearances, and tolerances in order that any such parts of a particular type or model may be replaced, interchanged, and adjusted without modification of the replacement parts or any other parts of the unit. Threads shall conform to FED-STD-H28 and the applicable Detailed Standard section referenced therein.

3.4.7 Gears. All gears and pinion designs selected for use in the forge or its components shall be manufactured to either English (USA) standard inch diametral pitch per AGMA 360.02 and AGMA 390.03 or Metric (SI) module ratio per the International Organization for Standardization (ISO) ISO 54 and ISO 1122/1 and ASTM E380-84.

3.4.8 Safety devices. Safety devices shall be provided for parts that present safety hazards to personnel. Safety devices shall not interfere with the operation of the forge or with the operator's performance.

3.4.8.1 Occupational safety standards. The product shall comply with OSHA standards set forth in 29 CFR 1910.211-222 that are applicable to forges.

3.5 Thermal capabilities. All types of forges shall be capable of attaining a coal bed temperature of at least 2,200°F and sustaining that temperature for at least four hours. The forge shall be capable of operating under these conditions without warping or without damage to the blower.

3.6 Detail of components. The forges shall consist of the following principal components.

3.6.1 Hearth. Hearths for types II and V forges (Figures 1 and 4) shall be fabricated from steel sheet or plate. Hearths for types X, XIII, and XIV forges (Figures 6 and 7) shall be constructed from steel sheet or plate or from cast iron. Type IV (knockdown) forges (Figure 3) shall be fabricated from steel sheet or plate. The type IV hearth shall serve as a case container and shall have hinges and steel or ductile iron handles, as illustrated in Figure 3. Applicable dimensions are specified in Table I.

3.6.2 Legs. Unless otherwise specified (see 6.2), legs for type II, III, IV, V, and VI forges shall be long enough to bring the hearth height to the dimensions required in Table I. The legs shall be of steel or iron. All legs shall be braced or secured to provide a level, sturdy, and safe assembly. Clips shall be provided for type IV forges to facilitate knockdown and reassembly (see Figure 3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

3.6.3 Blower. Unless otherwise specified (see 6.2), blowers shall be manually, electrically, or compressed air operated. Minimum fan diameters shall be as specified in Table I.

3.6.3.1 Manual blower. Manual blower gearing shall be accurately cut (see 3.4.7). The gears composing the gear train shall be steel and shall use helical cut teeth when required to provide a quiet, smooth, and reliable operation. The gear ratio shall be not less than 45 to 1 i.e., one complete turn of the crank handle shall produce at least 45 revolutions of the fan. Shaft bearings shall be independently replaceable. The high speed shaft shall be equipped with end thrust ball or roller bearings. The crank handle shall be adjustable with means for counter-balancing and shall produce the air blast by operating the crank in either direction. Means shall be provided for lubrication of gears and bearings and retention of the lubricant within the gear case. Blower and gear cases shall be of cast iron or be fabricated of steel.

TABLE I. Type requirements.

Type	Figure	Hearth					Fan size (min.) (in.)	Weight (lbs.)
		Size (1) (sq. in.)	Material	Depth (nom.) (in.)	Thickness (min.) (in.)	Height (2) ±2 (in.)		
II	1	Round 450 ±20	Steel	5	0.078	36	9	110 ±20
III	2	Round 250 ±10	Steel	5	.078	36	(3)	80 ±15
IV	3	Rect. 300 ±20	Steel	7	.078	32	9	110 ±15
V	4	Rect. 700 ±50	Steel	3	.078	32	9	165 ±15
VI	5	Rect. 1500 ±150	Cast iron	3	.078	27	9	415 ±40
IX	6	Round 1000 ±75	Steel	5	.078	26	9	400 ±40
			Cast iron		.14			500 ±35
X	6	Round 1800 ±150	Steel	5	.078	30	9	400 ±40
			Cast iron		.14			500 ±50
XIII	7	Rect. 1600 ±150	Steel	7	.078	30	9	400 ±40
			Cast iron		.14			500 ±50
XIV	7	Square 2800 ±250	Steel	8	.078	25	10	950 ±100
			Cast iron		.14			1250 ±125

(1) For rectangular hearths the length shall be 125 ±15 percent of width.
(2) Height measured from floor
(3) Compressed air type, no fan required.

3.6.3.2 Electric blower. Electric blowers shall be capable of delivering sufficient volumes of air, at static pressures not to exceed six inches of water, to produce and maintain the heating capacity specified in 3.5. The blower, with motor, shall be mounted on, and secured to, the hearth.

3.6.4 Tuyeres. Tuyeres for all types of forges shall be cast iron or fabricated of steel and constructed to permit cleaning and ease of replacement. Means shall be provided to brace and hold the tuyere in place.

3.6.5 Knockdown type. Type IV forges, (see Figure 3) shall be designed with detachable tuyere, blower pipe, and legs. These components shall be held rigidly and safely in position when the forge is assembled for operation. When the parts are detached and packed in the case, they shall be held securely in place and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

protected from conditions that are to be encountered during normal service. The base shall be equipped with steel or ductile iron handles (see 3.6.1). A hasp and tongue shall be provided to assure that the case remains closed. The windshield shall function as the case lid.

3.7 Standard equipment.

3.7.1 Windshield. Unless otherwise specified (see 6.2), the windshields illustrated in Figures 1 and 2 shall be provided for types II and III forges and, when specified (see 6.2), for type V forges.

3.7.2 Half hood. When specified (see 6.2), a half hood of the type illustrated in Figures 4 and 5 shall be provided for type V and VI forges.

3.7.3 Separate hood and vent. Unless otherwise specified (see 6.2), a canopy type hood and counter-weighted telescopic vent pipe shall be furnished with type IX, X, XIII, and XIV forges (see Figures 6 and 7).

3.7.4 Coal box. Unless otherwise specified (see 6.2), coal boxes shall be provided for type VI, IX, X, XIII, and XIV forges (see Figures 5, 6, and 7). The boxes may be attached and contoured to the hearth structure or may be a part of the hearth structure by fixed or movable partitioning. Coal boxes for type IX, X, XIII, and XIV forges shall be capable of containing a minimum of 40 pounds of coal.

3.7.5 Water tank. Unless otherwise specified (see 6.2), a water tank shall be provided for type VI, IX, X, XIII, and XIV forges (see Figures 5, 6, and 7). When specified (see 6.2), a water tank shall be provided for type V forges. Water tanks for type IX, X, XIII, and XIV forges shall have at least a ten gallon capacity and shall be provided with a basket of heavy wire mesh, perforated plate, or expanded metal. The water tank may be integral with the coal box (see 3.7.4), attached and contoured to the hearth structure, or be an integral part of the forge structure.

3.7.6 Forge tools. Type IX, X, XIII, and XIV forges shall be provided with a forge hoe, 90° poker, and shovel.

3.8 Electrical equipment.

3.8.1 Motor. For military purchases, electric blower motors shall be a continuous duty type conforming to CC-M-1807 with class B insulation. The motors shall be variable or fixed speed, universal or alternating current, as specified (see 6.2). Thermal type overload and manual reset button protection shall be provided. Unless otherwise specified (see 6.2), the power supply shall be 115 volts, single phase, 60 Hertz.

3.8.2 Speed regulator. When specified (see 6.2), a variable speed regulating device shall be provided for type IX, X, XIII, and XIV forges which shall allow speed control from a positive "off" position to maximum speed. The overload protective device (see 3.8.1) may be an integral part of the speed regulator assembly when practical. A heavy duty armored cable conforming to J-C-30, type ACH, shall be used to connect the speed regulator and protective device to the motor. Wiring, speed controls, and protective devices shall be such as shall obtain UL approval.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

3.8.3 Power supply cord. Unless otherwise specified (see 6.2), type IX, X, XIII and XIV forges shall be furnished with not less than ten feet of rubber covered, three conductor, type SO heavy duty, electrical cord conforming to UL 73. The ground conductor shall be securely connected to the exposed metal of the forge to provide a common ground. Unless otherwise specified (see 6.2), the power cord shall be terminated with a two pole, three wire grounding plug conforming to W-C-596 and W-C-596/11.

3.8.4 Fungus control. Components of electrical circuitry that are hermetically sealed or inherently resistant to fungus growth and moisture need not be treated. Components of electrical circuitry that are not inherently resistant to fungus growth or moisture shall be treated in accordance with MIL-T-152 and MIL-V-173.

3.9 Painting. Unless otherwise specified (see 6.2), painting and finishing shall be in accordance with the best commercial practice in the industry. Before painting, all surfaces shall be clean and be free of all foreign matter detrimental to painting. At least one coat of primer (or a phosphate or chromate base) and one coat of enamel, or equivalent (i.e., epoxy enamel), shall be applied.

3.10 Product identification. For military activities, the forges shall be marked for identification in accordance with MIL-STD-130 and, unless otherwise specified (see 6.2), shall include the National Stock Number stamped in the metal body of the forge. For civil agencies, the forges shall be marked in a plain and permanent manner with the manufacturer's name or trademark in such a way that the source of manufacture can be readily identified.

3.11 Workmanship. Standards of workmanship shall assure that the forges shall have the stability, strength, safety, and efficient operating characteristics found in the best commercial units and as specified in Section 3.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 First article inspection. First article inspection shall be applied to the preproduction model or initial production item (see 3.1). Unless otherwise specified (see 6.2), first article inspection shall consist of the examination in 4.6 and all tests under 4.7. Failure of the first article to pass the examination or any of the tests shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Unless otherwise specified (see 6.2), quality conformance inspection shall be applied to production items offered for acceptance under the contract. Unless otherwise specified (see 6.2), quality conformance inspection shall consist of (a) through (c) below. Failure of any item to pass an examination or test shall be cause for rejection of the item.

(a) Product examination (see 4.6).
(b) Operational test and electric blower test, when applicable (see 4.7.1 and 4.7.3).
(c) Packaging inspection (see 4.8).

4.5 Sampling. When required (see 6.2), sampling for quality conformance inspection shall be as specified in MIL-STD-105. For packaging examination (see 4.6) and test (see 4.7.1 and 4.7.3), use General Inspection Level II and an Acceptable Quality Level (AQL) of 1.0 percent. For packaging inspection (see 4.8), use Special Inspection Level S-4 and an AQL of 4.0 percent.

4.6 Examination. Forges shall be visually and manually examined to determine conformance with the requirements of 3.2 through 3.4.8.1 and 3.6 through 3.11. Visual examination shall include verification of completeness of manufacture and assembly, conformance to specified standards, adequacy of markings, proper cleaning, and freedom from defects. Manual examination shall include the operation of movable parts by hand to assure proper functioning. The examination provisions may be applied at the earliest practical point in manufacture at which it is feasible to inspect for acceptance without risk of change in the characteristic by subsequent operations. Failure of the contractor to provide objective evidence that the forge and its components have passed the examinations prescribed by the contractor's inspection system shall be cause for rejection.

4.6.1 Evidence of compliance with OSHA standards. Evidence of compliance with applicable safety and health requirements shall be reviewed (see 3.4.8.1 and 6.4).

4.7 Tests.

4.7.1 Operational tests. The forge shall be prepared for unfired operation in accordance with the manufacturer's instructions and the blowers tested to assure compliance with applicable operational requirements of Section 3.

4.7.2 Heat test (thermal capability). The forge shall be operated in accordance with the manufacturer's instructions and, with the fire started, shall be capable of maintaining a coal bed temperature of 2,200°F for a period of at least four hours. Temperature observation shall be by means of pyrometer, pyrometric pellets, or pyrometric crayon. Failure of manual blower, overheating of electric blower, bearing failures, distortion of forge components, or failure to attain and maintain required temperature shall be cause for rejection.

4.7.3 Electric blower. When the forge is furnished with an electric blower, the static pressure produced by the fan shall be measured to determine compliance with requirements of 3.6.3.2. A universally recognized and accepted method (piezometer tube, pitot tube, etc) shall be used for measuring static pressure. The test procedures and other basic physical conditions shall comply with ASME PTC 11.

4.8 Packaging inspection. Packaging inspection shall be conducted before and after packaging to determine compliance with the requirements of Section 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Military preservation, packing, and marking. When specified (see 6.2), requirements for Level A preservation and for Levels A and B packing and marking shall be in accordance with MIL-F-3296.

5.2 Industrial preservation, packing, and marking. Unless otherwise specified (see 6.2), preservation, packing, and marking shall be in accordance with ASTM D3951-82.

5.3 Marking for civil agencies. When specified (see 6.2), marking for shipment for civil agencies shall be in accordance with FED-STD-123.

6. NOTES

6.1 Intended use. The forges covered by this specification are intended for general use in blacksmithing, riveting, and general field maintenance repair work.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2).
(c) First article when required (see 3.1).
(d) Legs for types II through VI forges if different (see 3.6.2).
(e) Blowers if different (see 3.6.3).
(f) Windshield for types II and III forges if different (see 3.7.1).
(g) Windshield when required for type V forge (see 3.7.1).
(h) Half-hood when required for types V and VI forges (see 3.7.2).
(i) Hood and vent for types IX, X, XIII, and XIV forges if different (see 3.7.3).
(j) Coal box for types VI, IX, X, XIII, and XIV forges if different (see 3.7.4).
(k) Water tanks for types VI, IX, X, XIII, and XIV forges if different (see 3.7.5).
(l) Water tank for type V forge when required (see 3.7.5).
(m) Motor type, class, style, and power characteristics required (see 3.8.1).
(n) Speed regulating device when required for types IX, X, XIII, and XIV forges (see 3.8.2).
(o) Power supply cord and plug connector for types IX, X, XIII, and XIV forges if different (see 3.8.3).
(p) Painting and finishing if different (see 3.9).
(q) Product identification if different (see 3.10).
(r) First article inspection if different (see 4.3).
(s) Quality conformance inspection if different (see 4.4).
(t) Sampling when required (see 4.5).
(u) Level of preservation, packing, and marking if different (see 5.1 and 5.2).
(v) Civil agency shipment marking when required (see 5.3).

6.3 Contract data requirements. Required technical data such as operator's manuals, parts lists, and other instructions for operation and maintenance, as identified on a numbered DD Form 1664, should be specified on a DD Form 1423 incorporated in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

6.4 OSHA standards. Products which meet all requirements of this specification comply with the OSHA standards published prior to the date of this specification and identified in Section 3 (see 3.4.8.1).

MILITARY INTERESTS:

Custodian
Army - AL

Review Activities
Army - ME
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

PREPARING ACTIVITY:

Army - AL

DoD Project 3424-0090

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

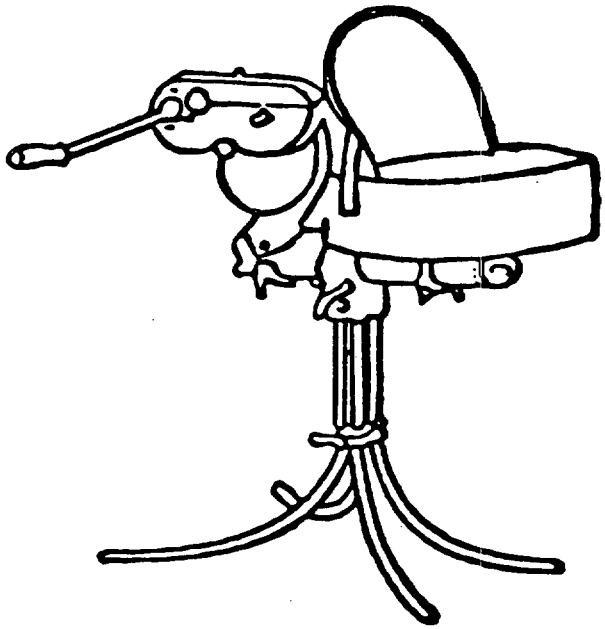


FIGURE 1. Type II.

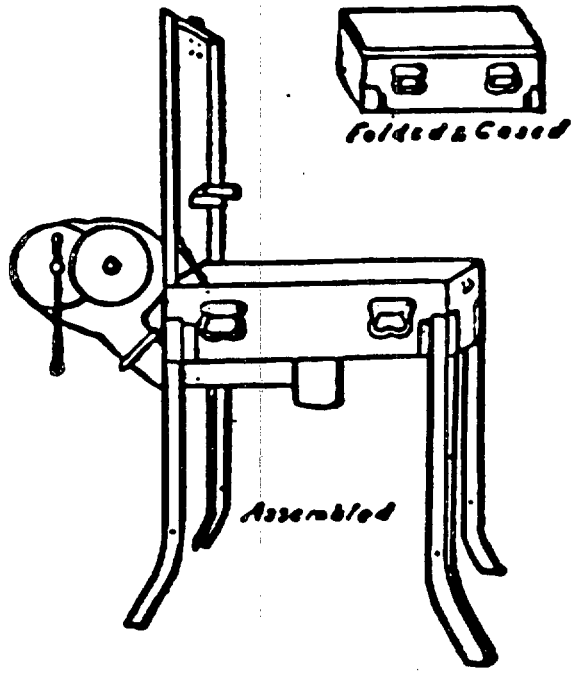


FIGURE 3. Type IV.

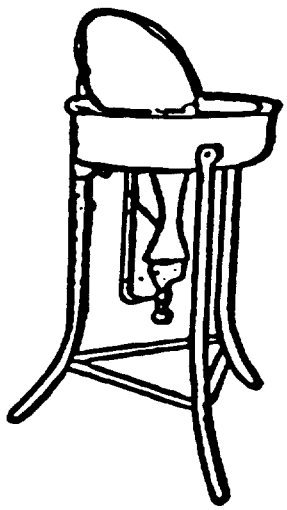


FIGURE 2. Type III.

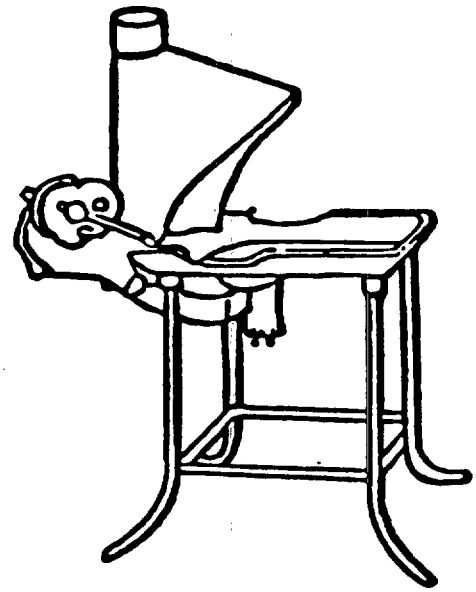


FIGURE 4. Type V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

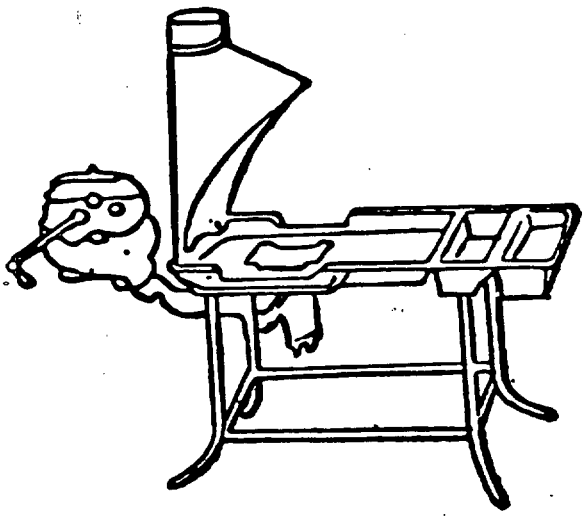


FIGURE 5. Type VI.

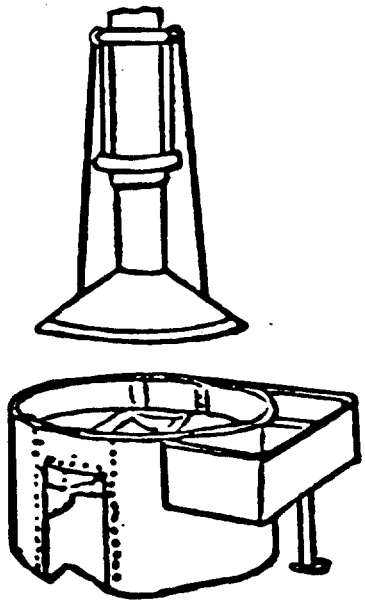


FIGURE 6. Type IX and X.

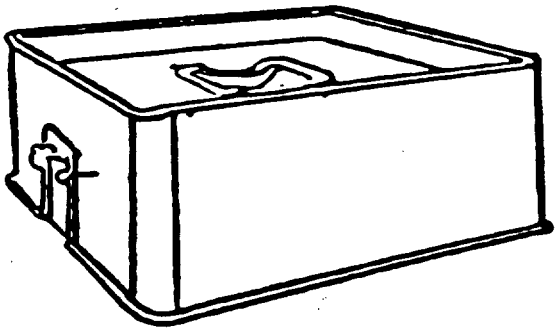


FIGURE 7. Type XIII and XIV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
5-F-5710	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.