T-D-00568B(GSA-FSS)
June 1, 1970
INTERIM REVISION OF
Fed. Spec. T-D-568A
March 4, 1965

INTERIM FEDERAL SPECIFICATION

DUSTER, VENETIAN BLIND

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D.C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification T-D-568A(GSA-FSS), dated March 4, 1965.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers a venetian blind duster which consists of a removable split dust-retaining cotton head and a wire frame attached to a wood handle.

1.2 Classification. Venetian blind dusters shall be of one type and grade.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

V-T-276 - Thread, Cotton.
V-T-285 - Thread, Polyester
V-T-295 - Thread, Nylon
QQ-C-320 - Chromium Plating (electrodeposited).
QQ-N-290 - Nickel Plating (electrodeposited).
QQ-P-416 - Plating, Cadmium (electrodeposited).
QQ-Z-325 - Zinc coating, electrodeposited, requirements for.
TT-W-572 - Wood-preservative; water repellent.
PPP-B-566 - Boxes, folding, paperboard.
PPP-B-636 - Box, fiberboard.
PPP-B-665 - Boxes; paperboard, metal stayed (including stay material).
PPP-B-676 - Boxes, setup.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 191 - Textile Test Methods.
Fed. Std. No. 751 - Stitches, Seams, and Stitching.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from the established distribution points in their agencies.)

FSC 7920

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T11:19Z
Check the source to verify that this is the current version before use.

Military Specifications:

MIL-P-116 - Preservation, Methods of.
MIL-W-6110 - Wood: Determination of moisture content of.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for shipment and storage.

(Copies of Military Specifications and Standards required by contractors in connection with specification procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample approval. Unless otherwise specified (see 6.1) before production is commenced, a sample of the duster to be supplied shall be submitted or made available to the contracting officer or his authorized representative for examination and approval in accordance with 4.2. Approval of the preproduction sample authorizes commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Illustration. The illustration shown in figure 1, is for the purpose of illustrating general design and is not to preclude the purchase of items which are otherwise in accordance with the requirements of this specification.

3.3 Materials. Material shall be as hereinafter specified.

3.3.1 Duster Head.

3.3.1.1 Yarn. The duster head yarn shall be unbleached cotton, minimum of 4 ply, approximately 775 ± 25 yards per pound and 3.5 ± .5 turns per inch, with minimum breaking strength of 15 pounds, when tested as described in 4.4.1.

3.3.1.2 Cloth backing. The backing shall be cotton duck cloth and shall have a minimum breaking strength of 150 pounds in the warp direction and 130 pounds in the filling direction. Yarns per inch shall be a minimum of 72 in the warp and 25 in the filling. The cloth shall have not more than 1 percent residual shrinkage when tested in accordance with 4.4.1.

3.3.1.3 Sewing thread. The sewing thread shall be type IA1, 4 ply, ticket number 24 in accordance with V-T-276, or a comparable thread from V-T-285 or V-T-295, with not less than 4.0 pounds breaking strength, when tested as described in 4.4.1.

3.3.1.4 Tie tapes. All tie tapes shall have non-raveling ends and edges. At the option of the manufacturer, the tie tapes shall be either of the following types:

Type I - Cotton or nylon filament woven tape, not less than 1/2 inch in width, and not less than 12 inches long with a minimum breaking strength of 40 pounds for each tape, when tested as described in 4.4.1.

Type II - Tubular braid of cotton yarn, not less than 1/4 inch in width, and not less than 12 inches long with a minimum breaking strength of 40 pounds for each tape, when tested as described in 4.4.1.

3.3.2 Handle and split frame.

3.3.2.1 Wood. Wood for the handle shall be thoroughly seasoned, close-grained and straight-grained hardwood, such as beech, birch, maple and ash, or close-grained and straight-grained softwood, such as Douglas fir, yellow pine or Mexican parana. The wood shall be thoroughly seasoned so that when tested in accordance with 4.3.2.1 it shall have a moisture content of not more than 12 percent or less than 8 percent. Wood for the handle shall be free from imperfections such as warp, decay, knots, checks, or any other defects which will effect serviceability.

3.3.2.2 Wire. The wire for the split frame assembly shall be formed of heavy duty spring steel wire not less than 0.148 inch in diameter before any corrosive resistant treatment. The wire shall be coated to resist corrosion. Coating shall be either cadmium in accordance with type III, class C of QQ-P-416 or zinc (galvanizing) in accordance with type III, class 3, of QQ-Z-325 and shall show no evidence of corrosion when tested as described in 4.4.2.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:19Z
Check the source to verify that this is the current version before use.

3.3.2.3 Ferrule or sleeve. The ferrule or sleeve shall be made from a metal which is inherently corrosion resistant, or steel which has been coated to resist corrosion, as specified in 3.3.2.2, or one of the following; chromium plating in accordance with types I or II, class 1, to a thickness of at least 0.00001 inch of QQ-C-320 or nickel plated in accordance with type FS, classes 1 or 2 of QQ-N-290. When ferrule is made of coated steel it shall show no evidence of corrosion when tested as described in 4.4.2.

3.4 Construction and assembly. The manufacturing operations listed in 3.4.1 and 3.4.2 are included as a guide for the contractor in the manufacture of the duster. The contractor is not required to follow the exact sequence of operations as listed. Minor deviations from the specified operations will be allowed where such changes do not lessen serviceability and durability of the end item, and are not in conflict with other requirements of the specification.

3.4.1 Duster head. The duster head shall be split for the purpose intended and for secure attachment to the split wire frame. The duster head shall be constructed with a cloth backing, specified in 3.3.1.2, cut 15-3/4 ± 1/4 by 4 ± 1/4 inches. The cloth shall be hemmed a minimum of 3/8 inch at each end. Rows of "base" yarns shall be placed widthwise, each laid side by side across and stitched securely on the top of the cloth. The over-all length of the "base" yarns shall be such that after stitching the yarns shall have a free end measuring 1-3/4 plus 1/2, minus 1/4 inches extending on both sides of the cloth pieces. There shall be 22 ± 2 "base" yarns per inch. Additional lengthwise and widthwise rows of yarns shall be attached to the duster head as follows: Two lengthwise rows of yarn, each yarn measuring 4-1/8 ± 3/8 inches over-all, shall be stitched down over the "base" yarns, with the stitching running parallel to and 1 ± 1/4 inch from the lengthwise edges of the cloth. One widthwise row of yarn shall be stitched parallel to an 1/2 inch plus 1/4, minus 1/8 inch from the edge of each end of cloth. The lengthwise and widthwise rows shall be attached by securely stitching the yarns at their center, so that each yarn shall have two free ends, each end measuring approximately 2-1/16 inches. The cloth shall be folded in half across the width so that all duster yarns are on the outside. The edges of the long sides shall be stitched closed, leaving the end open to form a pocket for the insertion of the frame. The duster shall be slit starting from the center of the folded end for a distance of 4-1/2 ± 1/2 inches to accommodate each extension of the split frame. The duster shall be stitched prior to the slitting operation to prevent any unravelling after slitting. Also, stitching shall be applied to prevent any further splitting of the duster when in use and any openings resulting from the slitting operations shall be closed by stitching. Stitch type 301 of Federal Standard Number 751, shall be used for all sewing in the construction of the duster head.

3.4.1.1 Tie tapes. Tie tapes shall be securely attached to the duster head by bartacking, so that after tying, the duster head will be securely attached to the handle assembly.

3.4.1.2 Completed duster head. The completed duster head shall weigh not less than 4.8 ounces and shall measure 7-1/2 ± 1/2 by 10-3/4 ± 1/2 inches over-all. The duster head shall be dust retaining and washable. The completed duster shall have ends of yarns cut evenly and free ends of yarns shall be evenly distributed across the mop. All stitching ends and thread breaks shall be backstitched or otherwise securely tacked to prevent unravelling or loosening of the stitching.

3.4.2 Handle and split frame construction.

3.4.2.1 Wire frame. The wire frame shall be formed or shaped the same as or similar to that indicated in figure 1, to finish approximately 3 x 7 inches over-all for proper placement and fitting of the duster head.

3.4.2.2 Ferrule or sleeve. The ferrule and sleeve shall be of either the closed or open type, and shall be not less than 0.038 inch in wall thickness before any corrosion resistant treatment, not less than 1 inch in length, and of such diameter to snuggly fit the wood handle of the duster. The ferrule or sleeve shall be secured to the wood handle by crimping, center punching or otherwise securely attached in such a manner to hold the wire frame in place.

3.4.2.3 Wood handle. The wood handle shall be rounded at the hand end and reduced in diameter or tapered at the duster end to accommodate the ferrule. The wood handle shall be 15/15 ± 1/16 inch in diameter at the hand end and the remaining portion may be tapered or otherwise shaped for balance and appearance. The diameter at the portion where the ferrule is attached shall be not less than 3/4 inch. A hole of sufficient diameter to accept a thickness of the wire frame shall be bored through the wood handle 1-3/4 + 3/8 inches from the duster end. The wood handle shall measure 28 ± 1/4 inches over-all in length. After all machining, the handle shall be sanded or tumbled smooth and coated with one of the following: a clear organic coating, or tumbled waxed in accordance with manufacturer's best practice or coated with not less than two coats of coppertone lacquer or varnish. The handle shall be water resistant in accordance with TT-W-572.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:19Z
Check the source to verify that this is the current version before use.

3.4.2.4 Assembly. The wire frame shall be inserted through a hole drilled through the diameter, or the ends anchored in each side of the hole. The forming, anchoring or fastening, and configuration, shall be in accordance with 3.4.2.1, 3.4.2.2 and 3.4.2.3. There shall be no rough or sharp projections or edges on the handle and split frame assembly which could cause injury to personnel or damage the duster head.

3.5 Workmanship. Dusters shall be free from defects which may affect their durability, serviceability or appearance. The occurrance of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When required, the preproduction sample submitted in accordance with 3.1 shall be inspected for all provisions of this specification applicable to end product examination and tests.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and material used are manufactured, tested, and inspected to insure conformance with the requirements of this specification.

4.3.2 In process inspection.

4.3.2.1 Moisture content of handles (wood). Prior to being machined and finished, the handles shall be tested for moisture content in accordance with MIL-W-6110 and then examined for compliance with 3.3.2.1. Three determinations shall be taken on each sample unit and the results shall be the average of the three. The lot shall be the number of handles being manufactured under essentially the same conditions and to be offered for inspection at one time. The inspection level shall be S-1, with an acceptable quality level (AQL) of 6.5 expressed in terms of defects per hundred units.

4.3.3 End item inspection. Examination of the end item shall be in accordance with the classification of defects, inspection levels and acceptable quality levels (AQL's) set forth below. The lot size of the purpose of determining the sample size in accordance with MIL-STD-105, shall be expressed in units of dusters for examination under 4.3.3.1 and 4.3.3.2.

4.3.3.1 Examination of the end item for defects in appearance, construction, and workmanship. The inspection level shall be I with an AQL of 2.5. The sample unit for this examination shall be one completed duster.

TABLE I. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Handle	Not specified wood.		X
	Not straight-grained or close-grained.		X
	Any knots, hole, decay, check, or any other defect which will affect serviceability.	X	
	Not coated with clear organic coating, tumble waxed or coated with not less than two coats of coppertone lacquer or varnish.		X
	Dirt or foreign matter imbedded in finish.		X
	Wet or tacky.		X
	Not rounded at handle end.		X
Split Frane	Not shaped as specified.	X	
	Not noncorrosive.		X
	Rough or sharp places.	X	
	Damaged.	X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:19Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (continued)

Examine	Defect	Classification	
		Major	Minor
Ferrule	Missing or not of specified type.	X	
	Not noncorrosive.		X
	Damaged or malformed in a way to affect serviceability.	X	
	Any rough or sharp places.	X	
	Ferrule loosely fit on handle.		X
Duster Head	Any section missing.	X	
	Rancid or objectionable odor.		X
	Insect infestation.	X	
	Spotted, soiled or stained.		X
	Tie tapes omitted.	X	
Duster	Tie tape not securely attached.		X
	Free ends of yarns not evenly distributed across width of mop as applicable.	X	
	Mop yarns not caught securely by stitching. (Simulate by attempting to pull selected yarns out under reasonable tension by hand)	X	
	Any weakening material defect such as a hole, tear, cut, smash, or other defect which may develope into a hole or which affects serviceability.	X	

4.3.3.2 Examination for dimensional characteristics. The sample unit for this examination shall be one completed duster. The inspection level shall be S-2 with an AQL of 6.5.

Examine	Defect
Dimensions	Less or more than specified dimension.

4.3.4 Examination for preparation for delivery. An examination shall be made to determine whether packaging, packing and marking as required by section 5 of this specification are complied with.

4.4 Tests.

4.4.1 Methods. The methods of testing as specified in Federal Test Method Standard No. 191, wherever applicable, and as listed in TABLE II shall be followed. The physical and chemical values specified in section 3 apply to the average of the determination made on a unit of product for test purpose as specified in the applicable test method.

TABLE II

Characteristic	Requirement paragraph	Test method
Breaking strength for yarns	3.3.1.1	4100
Twist in ply yarns, turns per inch	3.3.1.1	4054
Breaking strength of woven cloth	3.3.1.2	5100
Shrinkage of cloth in laundry	3.4.1.2	5550

4.4.1.1 Testing criteria. Sampling unit for testing shall be as specified in subsidiary specifications and as follows:

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:19Z
Check the source to verify that this is the current version before use.

TABLE II (continued)

Component	Lot size expressed as	Sample Unit
Duster head yarn	Yards	40 yards 1/ 2/
Cloth Cotton Duck	Yards	3 yards full width 1/

1/ Except that 5 determinations shall be made per sample unit.
2/ Not less than 3 sample units from each lot shall be tested.

4.4.2 Corrosion test. Completed parts when fabricated of ferrous metal shall be placed in a boiling 10 percent (by weight) aqueous solution of sodium chloride for a period of not less than 15 minutes. The part upon being removed from the solution shall be immediately immersed for at least one hour in a 10 percent (by weight) aqueous solution of sodium chloride at room temperature of 68 to 85 degress F. The part shall then be removed from this solution and without having adhering liquid wiped off, allowed to dry for at least 24 hours at room temperature 68 to 85 degrees F., and 48 to 52 percent relative humidity and then wiped free of any residue and examined for compliance with 3.3.2.2 and 3.3.2.3.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C, as specified (6.1).

5.1.1 Level A. The dusters shall be packaged in accordance with MIL-P-116, method III.

5.1.2 Level B. Each duster shall be packed in a close-fitting box conforming to PPP-B-566, PPP-B-665, or PPP-B-676, type and style optional. The box shall be secured to prevent accidental opening.

5.1.3 Level C. The dusters shall be packaged in accordance with the supplier's commercial practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (6.1).

5.2.1 Level A. The dusters shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant, V3c, style RSC. Each box shall be closed, waterproof sealed with tape, and reinforced with bands of filament tape in accordance with the appendix to the box specification.

5.2.2 Level B. Twenty-four dusters, packaged as specified in 5.1, shall be packed in a box conforming to PPP-B-636, type, class, and style optional. Bursting strength of the fiberboard shall be not less than 200 p.s.i. Closure shall be in accordance with the appendix to the box specification.

5.2.3 Level C. The dusters shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civilian agencies. In addition to any special markings required by the contract or order (6.1), the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Order data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number and date of this specification.
(b) When preproduction sample is required (see 3.1).
(c) Selection of applicable levels of packaging and packing.
(d) Any special marking required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:19Z
Check the source to verify that this is the current version before use.

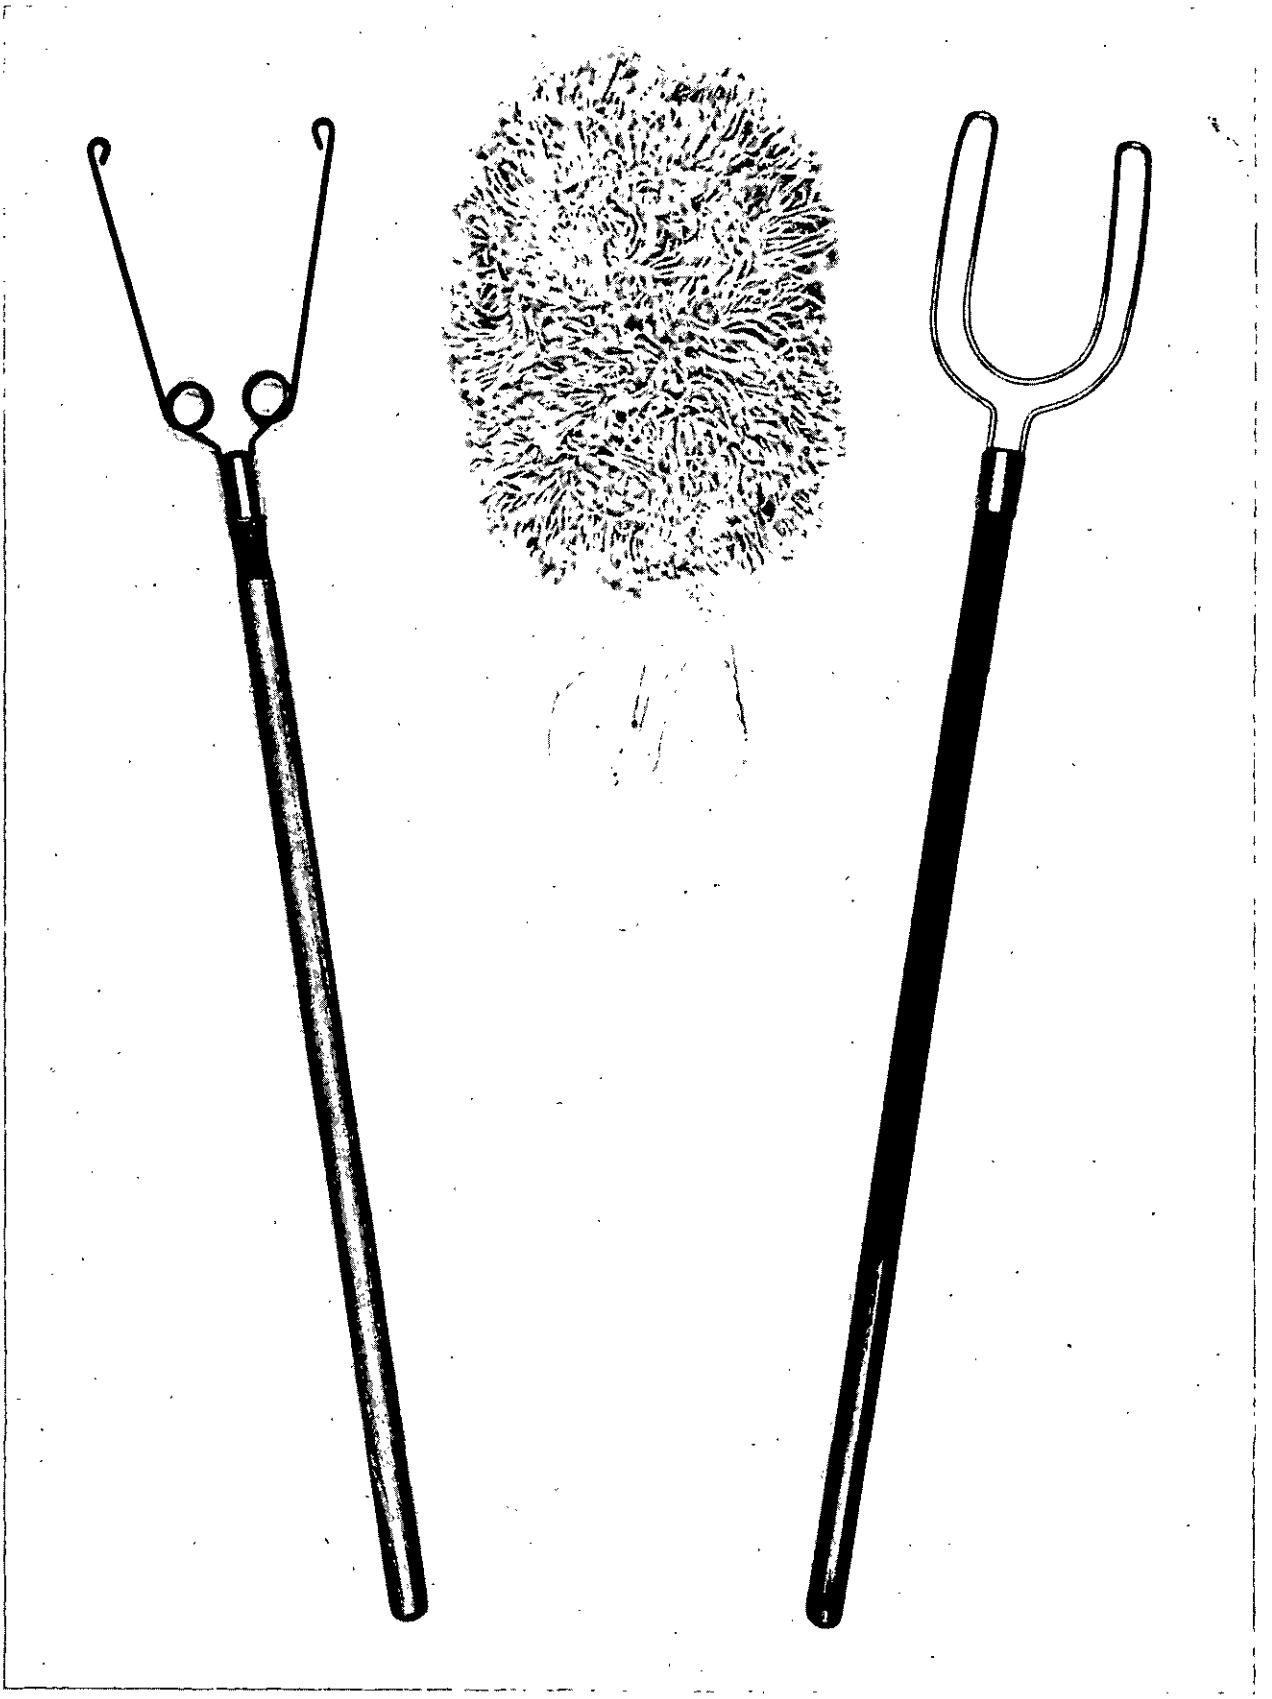


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: General Services Administration, FSS, (FMSO), Wash., D.C. 20406.
NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

T-D-00568B(GSA-FSS) Duster, Venetian Blind

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:19Z
Check the source to verify that this is the current version before use.