T-M-00567B(GSA-FSS)
September 22, 1970
INTERIM REVISION OF
Fed. Spec. T-M-567A
June 2, 1958

INTERIM FEDERAL SPECIFICATION

MOP, DUSTING, COTTON, TRIANGULAR

This Interim Federal Specification was developed by the Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification T-M-00567A, dated June 2, 1958.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers a triangular shape, dry or oiled, cotton mop primarily intended for dusting smooth surface floors.

1.2 Classification. Triangular shaped dust mops shall be of one type and size and shall have dry or oiled mop yarns as specified (see 3.3.2.2 and 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications

V-T-276 - Thread, Cotton.
V-T-285 - Thread, Polyester.
V-T-295 - Thread, Nylon.
QQ-C-320 - Chromium, Plating (Electrodeposited).
QQ-N-290 - Nickel Plating (Electrodeposited):
QQ-P-416 - Plating, Cadium (Electrodeposited).
QQ-Z-325 - Zinc Coating, Electrodeposited, Requirements for.
TT-W-572 - Wood-Preservative, Water-Repellent.
PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Box, Fiberboard.
PPP-B-665 - Boxes; Paperboard, Metal-Stayed (Including Stay Material).
PPP-B-676 - Boxes, Setup.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
Fed. Test Method Std. No. 191 - Textile Test Methods.
Fed. Std. No. 751 - Stitches, Seams, and Stitching.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

FSC 7920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

Military Specification:

MIL-P-116 - Preservation, Methods of.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspections by Attributes.
MIL-STD-129 - Marking for shipment and storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Society for Testing and Materials (ASTM) Standards:

D-2016 - Moisture Content of Wood.

(Applications for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

National Classification Board:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc. Attention: Tariff Order Section, 1616 P Street N. W. Washington, D. C. 20036)

Uniform Classification Committee:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Illinois 60606)

3. REQUIREMENTS

3.1 Preproduction sample approval: When specified (see 6.1) before production is commenced, a sample of the mop to be supplied shall be submitted or made available to the contracting offier or his authorized representative for examination and approval in accordance with 4.2. Approval of the preproduction sample authorizes commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Design. Triangular shaped floor dust mops shall consist essentially of a wire frame, a wood handle with fitting to fasten to the frame, and a detachable cotton mophead section which slides over the frame (see figure 1).

3.2.1 Illustration. The illustration shown in figure 1 is for the purpose of illustrating general design and is not to preclude the purchase of items which are otherwise in accordance with the requirements of this specification.

3.3 Materials.

3.3.1 Handle.

3.3.1.1 Wood. Wood for the handle shall be close-grained hardwood, Southern yellow pine, Douglas fir, or Ramin (Gonystylus spp.). The wood shall be thoroughly seasoned so that when tested in accordance with 4.3.2 it shall have a moisture content of not less than 8 or more than 12 percent. Wood for the handle shall be free from imperfections such as warp, decay, knots, checks, shakes, splits, slivers, bark pockets, and larva channels. The slope of the grain in any handle shall be not steeper than 1 inch in 15 inches, and any dip grain shall be not more than 1/2 the diameter of the handle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

3.3.1.2 Wire. The wire for the frame shall be of 1/4 inch diameter corrosion resistant steel, or iron or steel rod made corrosion resistant by a suitable coating. The coating shall be either cadmium in accordance with type III, class C of QQ-P-416 or zinc (galvanizing) in accordance with type III, class 3 of QQ-Z-325 and shall show no evidence of corrosion when tested as described in 4.4.2.

3.3.1.3 Ferrule. The ferrule attached on the mop end of the handle shall be metal which is inherently corrosion resistant, or steel which has been coated to resist corrosion as specified in 3.3.1.2, or one of the following: chromium plated in accordance with types I or II, class 1, to a thickness of at least 0.00001 inch of QQ-C-320 or nickel plated in accordance with type FS, classes 1 or 2 of QQ-N-290. When the ferrule is made of coated steel it shall show no evidence of corrosion when tested as described in 4.4.2.

3.3.2 Mophead.

3.3.2.1 Yarn. The mophead yarn shall be of thoroughly cleaned bleached or unbleached cotton, minimum of 2 ply, approximately 800 to 825 yards per pound and 2.5 ± .5 turns per inch, with a minimum breaking strength of 8 pounds, and shall not contain more than 5 percent of noncellulosic materials when tested as specified in 4.4.1.

3.3.2.2 Oil treatment of yarn. When oil treated mop yarn is specified, the yarn of each 12 mops shall be sprayed with approximately 1 cc. of mineral oil. The viscosity of the oil shall be 80-90 seconds (Saybolt Universal) at 100°F. The contractor must certify that the above treatment has been fulfilled (see 6.2).

3.3.2.3 Mophead cloth bands. The bands shall be twill or drill cloth made of bleached or unbleached cotton or blend of cotton and hydrophobic fibers. The cloth shall weigh not less than 6.8 ounces per square yard and shall have a minimum breaking strength of 140 pounds in the warp direction and 90 pounds in the filling direction. Yarns per inch shall be a minimum of 70 in the warp and 58 in the filling. The cloth shall have not more than 1 percent residual shrinkage when tested in accordance with 4.4.1. Unbleached cloth shall not exceed 12.0 percent nonfibrous materials and bleached cloth shall not exceed 5.0 percent nonfibrous materials when tested in accordance with 4.4.1.

3.3.2.4 Sewing thread. The sewing thread shall be 4-ply, ticket number 12 for the needle, and not finer than 4-ply, ticket number 20 for the bobbin. Thread shall meet the requirements for type IA1 of V-T-276, or comparable thread meeting requirements of V-T-285 or V-T-295, with not less than 4.0 pounds breaking strength when tested as described in 4.4.1.

3.4 Construction and assembly. The manufacturing operations listed in 3.4.1 and 3.4.2 are included as a guide for the contractor in the manufacture of the mop. The contractor is not required to follow the exact sequence of operations as listed. Minor deviations from the specified operations will be allowed where such changes do not lessen serviceability and durability of the end item, and are not in conflict with other requirements of the specification.

3.4.1 Handle and frame construction.

3.4.1.1 Wood Handle. The wood handle shall be straight. Bowing or warping of more than 3/8 inch per full length of handle will be unacceptable. The handle shall be not less than 53 inches long and shall have a uniform diameter of not less than 3/4 inch except at the mop end where it may be shouldered to accommodate the ferrule. The handle shall be rounded at the [illegible] and shall be smooth and waxed, or coated with one heavy coat or two medium coats of transparent varnish or lacquer. The handle shall be water resistant in accordance with TT-W-572.

3.4.1.2 Ferrule. The handle shall have a ferrule with an integral plate attached to the mop end. The ferrule shall be metal as described in 3.3.1.3 with a sleeve suitable for inserting the wood handle at one end, and a snap clamp, or a wingnut and clamp plate, at the other end for gripping the frame. The ferrule shall be not less than 0.050 inch in thickness and not less than 3-1/2 inches in length including the integral plate. The sleeve shall be of such diameter to snugly fit the wood handle. The clamp plate shall be not less than 0.058 inch in thickness, not less than 1-5/8 inches in length and of such configuration to hold the wire frame in place. The ferrule or sleeve shall be securely crimped, center punched, or otherwise securely attached to the wood handle.

3.4.1.3 Wire frame. The frame shall be triangular in shape with split ends. That portion of the frame carrying the yarn shall be 24 inches ± 1 inch long. The frame shall be properly formed (see figure 1) and shall fit securely in the handle fitting clamp. The split ends shall be smoothly finished to facilitate the removal and replacement of the mophead.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

3.4.2 Mophead construction.

3.4.2.1 Cloth bands. A band shall be cut from material specified in 3.3.2.3 approximately 4 inches wide and 42 inches long. The raw edges on the sides shall be turned under a minimum of 1/4 inch and securely sewn or a tape band woven 3 inches wide with nonraveling edges shall be cut 42 inches in length. Salvage edges of cut cloth are not required to be turned under.

3.4.2.2 Mophead. The mophead shall be constructed as follows: The yarns shall be cut 12 inches long, each laid side by side for a length of 19 inches, the band placed across the yarns 5 inches from the end of the yarns, the 2-inch overlap turned under, and the assembly sewed lengthwise of the band with 3 equally-spaced double rows of stitches. The band shall then be folded length wise in the center, with the longer yarns on the outside and the shorter yarns on the back, and securely sewn with 2 rows of stitches in such a manner as to form a tubular opening for the frame to pass through.

3.4.2.3 Stitching. The sewing shall be done by using stitch type 301 of Fed. Std. No. 751. The lock-type stitch shall have not less than 5 stitches per inch per row in the 2 rows forming the tubular opening.

3.4.2.4 Completed mophead. The completed mophead shall measure 19 inches $\pm$ 1/2 inch in length and 6 inches $\pm$ 1/2 inch in width. The mophead shall be dust retaining and washable. The completed mophead shall have ends of the yarns cut evenly and free ends shall be evenly distributed across the mop. All stitching ends and thread breaks shall be backstitched with stitch type 301 or otherwise securely tacked to prevent raveling or loosening of the stitching.

3.5 Workmanship. The mops shall be free from defects which may affect their durability, serviceability or appearance. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. The preproduction sample submitted in accordance with 3.1 shall be inspected for all provisions of this specification applicable to end product examination and tests.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and material used are manufactured, tested, and inspected to insure conformance with the requirements of this specification.

4.3.2 In process inspection.

4.3.2.1 Moisture content of handles (wood). Prior to being machined and finished, the handles shall be tested for moisture content in accordance with ASTM D2016, Standard Methods of Test for Moisture Content of Wood, and then examined for compliance with 3.3.1.1. Three determinations shall be taken on each sample unit and the results shall be the average of the three. The lot shall be the number of handles being manufactured under essentially the same conditions and to be offered for inspection at one time. The inspection level shall be S-1, with an acceptable quality level (AQL) of 6.5 expressed in terms of defects per hundred units.

4.3.3 End item inspection. Examination of the end item shall be in accordance with the classification of defects, inspection levels and acceptable quality levels (AQL's) set forth below. The lot size for the purpose of determining the sample size in accordance with MIL-STD-105, shall be expressed in units of mops for examination under 4.3.3.1 and 4.3.3.2.

4.3.3.1 Examination of the end item for defects in appearance, construction and workmanship. The inspection level shall be I with an AQL of 2.5 per hundred units. The sample unit for this examination shall be one completed mop.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Handles	Not specified wood.		X
	Not close grain.		X
	Any knots, decay, checks, holes, or any other defect which will affect serviceability.	X	
	Slope of grain steeper than 1 inch in 15 inches or dip grain more than 1/2 the diameter measurement.		X
	Warp or bow more than 3/8 inch per full length of handle.	X	
	Any worm hole, larva channel, or pocket open or visibly concealed with filler.		X
	Loose, raised, or torn grain producing a rough surface along upper two-thirds of handle.	X	
Finish of Handles	Not rounded at handle end.		X
	Out of round (i.e. any flat area or lack of uniform diameter throughout length).		X
	Consecutive machine skip, tool mark, or gouge along upper two-thirds of handle.	X	
	Occasional machine skip, tool mark, or gouge along upper two-thirds of handle.		X
	Not waxed or varnished or lacquer coated.		X
	Wet or tacky.		X
Handle Ferrule	Missing or not of specified type.	X	
	Not noncorrosive.		X
	Damaged or malformed, affecting serviceability.	X	
	Ferrule loosely fit on handle.	X	
Frame	Not triangular in shape.		X
	Does not fit securely into handle fitting clamp.		X
	Not noncorrosive.		X
	Any rough or sharp places.	X	
Mophead	Rancid or objectional odor.		X
	Insect infestation.	X	
	Spotted, soiled or stained.		X
	Banding cloth not folded in center in lengthwise direction and not stitched with a double row of stitches in a manner to form a tubular opening for the frame.	X	
	Wrong stitching type.	X	
	Less than 5 stitches per inch.		X
	Less than 3 rows of double stitches used to secure yarn on banding cloth.		X
	Raw edge not turned under 1/4 inch and not caught in row of stitches.		X
	Color of yarn and cloth not unbleached or bleached.		X
	Yarn not treated with mineral oil, when specified.		X
	Mop yarns not caught securely by stitching.	X	

4.3.3.2 Examination for dimensional characteristics. The sample unit for this examination shall be one completed mop. The inspection level shall be S-2 with an AQL of 6.5 per hundred units. The mops shall be examined for conformance with the applicable dimensional requirements of this specification.

4.3.4 Examination for preparation for delivery. An examination shall be made to determine whether packaging, packing and marking as required by section 5 of this specification are complied with.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

4.4 Tests.

4.4.1 Methods. The methods of testing as specified in Fed. Test Method Std. No. 191, wherever applicable, and as listed in table II shall be followed. The physical and chemical values specified in section 3 apply to the average of the determinations made on a unit of product for test purposes as specified in the applicable test method.

TABLE II. Test Methods

Characteristic	Requirement paragraph	Test method
Breaking strength for yarn	3.3.2.1	4100
Twist in ply yarns, turns per inch	3.3.2.1	4054
Nonfibrous materials (Mop yarn)	3.3.2.1	2611
Weight per square yard of woven cloth	3.3.2.3	5041
Breaking strength of cloth	3.3.2.3	5100
Yarns per inch of cloth	3.3.2.3	5050
Shrinkage of cloth in laundering	3.3.2.3	5550
Nonfibrous materials (cloth)	3.3.2.3	2611
Breaking strength of sewing thread	3.3.2.4	4102

4.4.1.1 Testing criteria. Sampling unit for testing shall be as specified in subsidiary specifications and as follows:

TABLE III. Sampling for tests

Component	Lot size expressed as	Sample Unit
Mophead yarn	yarns	165 yards 1/ 2/
Twill, drill or tape	yards	1 yard full width 1/
Threads	yards	610 yards 1/ 2/

1/ Except that 5 determinations shall be made per sample unit.
2/ Not less than 3 sample units from each lot shall be tested.

4.4.2 Corrosion test. Completed parts when fabricated of ferrous metal shall be placed in boiling 10 percent(by weight) aqueous solution of sodium chloride for a period of 15 minutes ± 1 minute. The part upon being removed from the solution shall be immediately immersed for a period of 1 hour ± 5 minutes in a 10 percent (by weight) aqueous solution of sodium chloride at room temperature of 68 to 85 degrees F. The part shall then be removed from this solution and without having adhering liquid wiped off, allowed to dry for at least 24 hours at room temperature 68 to 85 degrees F., and 48 to 52 percent relative humidity and then wiped free of any residue and examined for compliance with 3.3.1.2 and 3.3.1.3.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.1).

5.1.1 Level A and B.

5.1.1.1 Complete mops. Unless otherwise specified, the mop shall be detached from the handle and, if oiled, shall be securely wrapped in minimum 30 pound greaseproof paper.

5.1.1.2 Mopheads. Each oil mophead shall be securely wrapped in minimum 30 pound greaseproof paper. Each dry mophead shall be packaged in accordance with the supplier's commericial practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

5.1.1.2.1 Intermediate packaging (mopheads). Twelve mopheads, packaged as specified in 5.1.1.2, shall be intermediate packaged in a close fitting box conforming to PPP-B-636, class domestic. The box shall be closed in accordance with the appendix to PPP-B-636.

5.1.2 Level C. Complete mops or mopheads shall be packaged in accordance with the supplier's standard commerical practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.1).

5.2.1 Level A.

5.2.1.1 Complete mops. Unless otherwise specified, (see 6.1) twelve (12) complete mops, packaged as specified in 5.1, shall be packed in a close fitting box conforming to PPP-B-636, style FOL, class weather-resistant, minimum 275 pound bursting strength. Six (6) handles shall be placed in the box as bottom layer. Twelve (12) mopheads and frames shall be placed as an even layer on top of the handles. The remaining six (6) handles shall then be placed in a layer on top of the mopheads and frames. The box shall be closed, water-proofed and strapped in accordance with the appendix to PPP-B-636.

5.2.1.2 Mopheads. Six (6) intermediate packages shall be packed in a close fitting box conforming to PPP-B-636, class weather-resistant. The box shall be closed, waterproofed and strapped in accordance with the appendix to PPP-B-636.

5.2.2 Level B. The complete mops and mopheads shall be packed as specified in 5.2.1 except the boxes shall be in accordance with PPP-B-636, class domestic and the water proofing is not required.

5.2.3 Level C. The mops and mopheads shall be packed to assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification Rules or National Motor Freight Classification Rules.

5.3 Marking.

5.3.1 Civil agencies. In additional to markings required by the contract or order, the unit package and the shipping container shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to markings required by the contract or order, the unit package and the shipping container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) If oil treated yarn is required (see 3.3.2.2).
(c) Whether preproduction sample is required (see 3.1).
(d) Levels of packaging and packing required (see 5.1 and 5.2).
(e) If other than specified packing is required (see 5.2.1.1).
(f) Any special marking required (see 5.3).

6.2 For determining the viscosity of oil required, it is suggested that the contractor use ASTM Standard D-88-53 Viscosity by Means of The Saybolt Viscosimeter.

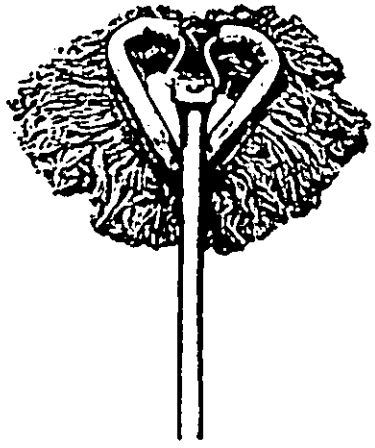


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: General Services Administration, FSS, (FMSQ), Wash., D.C. 20406.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

T-M-00567B (GSA-FSS) Mop, Dusting, Cotton, Triangular

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.