T-M-567a
JUNE 2, 1958

SUPERSEDING
Int. Fed. Spec. T-M-00567 (GSA-FSS)
August 17, 1955

FEDERAL SPECIFICATION

# MOP, DUSTING, COTTON, RECTANGULAR AND TRIANGULAR

*This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.*

## 1. SCOPE AND CLASSIFICATION

1.1 Scope.—This specification covers dry and oiled cotton mops primarily intended for dusting smooth surface floors.

1.2 Classification.

1.2.1 *Types and sizes.* The mops shall be natural color and of the following types and sizes, as specified. Each mop shall be complete with handle and all component parts. Size denotes length of block.

Type R.—Rectangular—dry
Size 17.—16½ inches.
Size 27.—26½ inches.
Note: See 6.2.
Type T.—Triangular—dry or oiled.

## 2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

*Federal Specifications:*
V-T-276—Thread; Cotton.
CCC-T-191—Textile Test Methods.
PPP-B-636—Boxes, Fiber.
PPP-T-97—Tape; Pressure-Sensitive Adhesive, Filament Reinforced.

*Federal Standards:*
Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

*Military Standards:*
MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

*Military Specification:*
MIL-W-6110—Wood, Determination of Moisture Content of.

(Copies of Military Specifications and Standards required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)


## 3. REQUIREMENTS

3.1 Type R, rectangular.—Rectangular dust mops shall consist essentially of a wooden block with swivel fitting for attaching the handle which screws on the swivel fitting, and detachable cotton mop sections which fasten to the block by means of snap fasteners. (See figure 1.)

3.1.1 *Handle.*—The handle shall be straight (bowing or warping of not more than ⅜ inch per full length of handle will be acceptable), of close-grained hardwood, Southern yellow pine, or Douglas fir, containing not less than 8 nor more than 12 percent moisture content (4.3.2)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

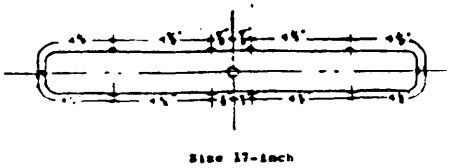

Size 17-inch



Size 27-inch

FIGURE 1.—Spacing of snap-fastener studs.



FIGURE 2.—Type R, rectangular mop.



FIGURE 3.—Mophead section, type R.

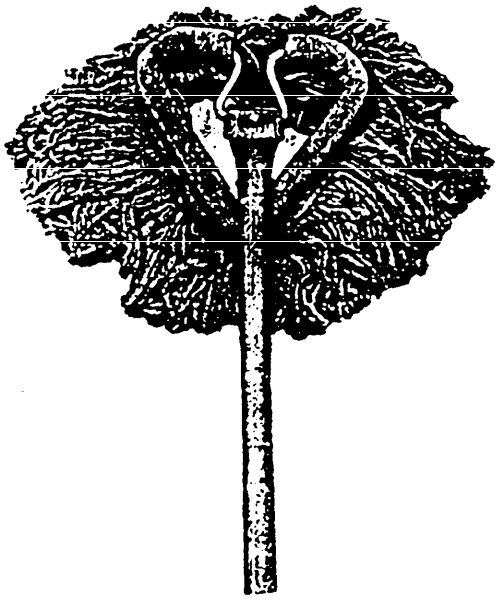


FIGURE 4.—Type T, triangular mop.

and shall be free from imperfections such as warp, decay, knots, checks, shakes, splits, slivers, bark pocket, and lava channels. The slope of the grain in any handle shall be not steeper than one inch in 15 inches. The handle shall be rounded at the hand end and shall have a hole in the mop end to accommodate the threaded shank (see 3.1.2.1).

3.1.1.1 *Handle dimensions.*—The handle shall be not less than 59 inches long and shall have a uniform diameter of not less than 1⅛ inches, except that 2½ inches from the mop end of the handle the diameter shall be stepped down to 1⅛-inch diameter and gradually tapered down to ⅞-inch diameter at the mop end of handle to accommodate the ferrule described in 3.1.1.3.

3.1.1.2 *Handle finish.*—The handle shall be smooth, and waxed or coated with one heavy coat or two medium coats of transparent varnish or lacquer.

3.1.1.3 *Ferrule.*—The ferrule shall be a tapered, closed end style made of metal having a wall thickness of 0.032±0.004 inch. The closed end shall have a ⅛-inch hole for the insertion of a threaded ball and socket shank. The length of the ferrule shall be 2½ inches long



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

and shall have an outside diameter of 1 ± 1/32 inch at the large end and 7/8 ± 1/32 inch at the small end. Approximately 5/16 inch from the large end of the ferrule there shall be a hole 1/4 inch in diameter to receive a finishing nail 1 inch long to secure the ferrule to the handle.

3.1.2 *Block.*—The block shall be of wood suitable for the purpose intended, containing not less than 8 nor more than 12 percent moisture content (4.3.2). It shall be free from imperfections such as knots, shakes, splits, checks, or decay. The slope of grain in any block shall be not steeper than one inch in 10 inches. The corners of the block shall be rounded. The block shall be smooth and finished by waxing, coating with a transparent lacquer, or coated with a suitable synthetic resin.

3.1.2.1 *Block fitting.*—There shall be securely attached to the block a cadmium-plated cast-steel or cast-malleable iron fitting having a thickness of 1/32 inch ± 1/64 inch, consisting of a four-pronged ball socket, a steel spring and wood screw by lag screw threaded extension shank with a ball tip. The shank, excluding ball tip, shall be 2 3/8 ± 1/8 inches in length threaded 1 1/8 ± 1/8 inches, and shall have a diameter of 5/16 inch. The fitting shall be so constructed as to permit swiveling of the mophead and to firmly hold the handle, when attached, in the desired position and angle. The metal fitting shall be secured to the block with 2 round-head bolts No. 10–24 (threads-diameter) extending through pre-drilled holes in the block and fastened flush on the underside of the block by 2 steel Tee Nuts No. 10–24.

3.1.2.2 *Block dimensions.*—The wood block shall be 2 ± 1/4 inches wide and 1 1/4 ± 1/8 inches thick. Length of blocks shall be as follows:

Size 17.—16 3/4 ± 1/4 inch.

Size 27.—26 3/4 ± 1/4 inch.

3.1.2.3 *Block finish.*—The block shall be smooth and finished with varnish, shellac, or lacquer.

3.1.2.4 *Block snap fastener studs.*—Studs for the snap fastener caps shall be spaced as shown in figure 2. Size 17-inch blocks shall have 10 studs. Size 27-inch blocks shall have 15 studs. A tolerance of ± 1/64 inch is permitted in the spacing of the studs.

3.1.3 *Mophead.*

3.1.3.1 *Mophead yarn.*—The mophead yarns shall be of cotton and conform to the following requirements:

| | |
|---|---|
| Ply of yarns (minimum) | 2 ply. |
| Yards per pound | 800 to 825 yards. |
| Turns per inch (minimum) | 2 turns. |
| Breaking strength (minimum) | 8 pounds. |
| Color | Natural. |
| Finish | Yarns shall contain not more than 5 percent of noncelluloaic materials. |

3.1.3.2 *Mophead fabric bands.*—The mophead fabric bands shall be of cotton and conform to the following requirements:

Weave.—Twill or drill.

Weight per square yard.—6.8 ounces (minimum).

Color.—Natural.

Shrinkage.—1 percent maximum (warp and filling).

Bands.—A band shall be cut 3 1/2 inches wide and 24 inches long and the raw edges on the sides turned under 1/4 inch and securely sewn or a tape band woven 3 inches wide with nonraveling edges shall be cut 24 inches in length.

3.1.3.3 *Thread.*—The sewing thread used in attaching the band to the yarns shall be 4 cord, ticket No. 12 for the needle, and not finer than 4 cord, ticket No. 20 for the bobbin. They shall meet the requirements for type IA1 of Federal Specification V–T–276.

3.1.3.4 *Stitching.*—The sewing shall be done by using any type stitch and having not less than five stitches per inch.

3.1.3.5 *Snap fasteners.*—The snap fasteners shall be of brass, with visible surfaces of nickel-plated caps and studs. The fasteners shall be the ring-socket type. Sockets shall have a resilient wire ring assembled inside the socket shell. Studs shall be of the drive-nail type,



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

self-piercing, and not less than ½ inch long. Size of caps shall be 24-line.

3.1.3.6 *Mophead construction.*—The mophead shall be composed of sections, (fig. 3), each section 20 + ¼ inches long and the section shall be constructed as follows: the yarns shall be cut 12 inches long, each laid side by side for a length of 20 inches, a band (see 3.1.3.2), placed across the yarns 5 inches from one end of the yarns, the ends of the band turned under 2 inches on each end, and the assembly sewed lengthwise of the band with 3 equally-spaced double rows of stitching. The band shall then be folded lengthwise in the center and sewed with 2 rows of stitching ⅜ inch apart. Five snap fasteners (caps and sockets) shall be firmly affixed through the fabric band ½ inch from the bottom edge, and 4¾ inches ± 1/64 inch apart starting from the center of the section, and shall fit the studs on the block. The longer yarns shall be on the outside of the finished mophead section.

3.2 Type T, triangular.—Triangular floor dust mops shall consist essentially of a wire frame, a handle with fitting to fasten to the frame, and a detachable cotton mophead section which slides over the frame (see figure 4).

3.2.1 *Handle.*—The handle shall be straight (bowing or warping of not more than ⅛ inch per full length of handle will be acceptable), of close-grained hardwood, Southern yellow pine, or Douglas fir, dried to a moisture content of not less than 8 and not more than 12 percent (4.3.2) and shall be free from imperfections such as warp, decay, knots, checks, shakes, splits, slivers, bark pockets, and larva channels. The slope of grain in any handle shall be not steeper than 1 inch in 15 inches. The handle shall be rounded at the hand end.

3.2.1.1 *Handle dimensions.*—The handle shall be not less than 53 inches long and shall have a uniform diameter of not less than ¾ inch.

3.2.1.2 *Handle finish.*—The handle shall be smooth and waxed, or coated with one heavy coat or two medium coats of transparent varnish or lacquer.

3.2.1.3 *Ferrule.*—The handle shall have a ferrule attached on the mop end. The ferrule shall be metal with a socket suitable for inserting the handle at one end, and a snap clamp, or a wingnut, clamp and plate, for gripping the frame. The ferrule shall be securely fastened to the handle.

3.2.2 *Frame.*—The frame shall be triangular in shape and made of a ¼ inch diameter iron or steel rod, made corrosion-resistant by a suitable coating. The portion of the frame carrying the yarn shall be 24 inches long. The frame shall be properly formed and shall fit securely into the handle fitting clamp.

3.2.3 *Mophead.*

3.2.3.1 *Mophead yarn.*—The mophead yarns shall be of cotton or hemp tow and conform to the following requirements:

| | |
|---|---|
| Ply of yarns (minimum) | 2 ply. |
| Yards per pound | 800 to 825 yards. |
| Turns per inch (minimum) | 2 turns. |
| Breaking strength (minimum) | 8 pounds. |
| Color | Natural. |
| Finish | Yarns shall contain not more than 5 percent of noncellulosic materials. |

3.2.3.1.1 *Oil treatment of yarn.*—When oil treated mop yarn is specified, the yarn of each 12 mops shall be sprayed with approximately 1 cc. of mineral oil. The viscosity of the oil shall be approximately 90 seconds (Saybolt Universal) at 100° F. The contractor must certify that the above treatment has been fulfilled.

3.2.3.2 *Mophead fabric bands.*—The mophead fabric bands shall be of cotton and conform to the following requirements:

Weave.—Twill or drill.

Weight per square yard.—6.8 ounces (minimum).

Color.—Natural.

Shrinkage.—1 percent maximum (warp and filling).

Bands.—A band shall be cut approximately 4 inches wide and 42 inches long and the raw edges on the sides turned under ¼ inch and securely sewn, or a tape band woven 3 inches wide with nonraveling edges shall be cut 42 inches in length.

3.2.3.3 *Thread.*—The sewing thread used in attaching the band to the yarns shall be 4 cord



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

ticket No. 12 for the needle and not finer than 4 cord ticket No. 20 for the bobbin. Thread shall meet the requirements for type IA1 of Federal Specification V-T-276.

**3.2.3.4** *Stitching.*—The sewing shall be done by using a lock-type stitch having not less than 5 stitches per inch per row in the 2 rows forming the tubular opening.

**3.2.3.5** *Mophead construction.*—The mophead shall be constructed as follows: The yarns shall be cut 12 inches long, each laid side by side for a length of 19 inches, the band placed across the yarns 5 inches from one end of the yarns, the 2-inch overlap turned under, and the assembly sewed lengthwise of the band with 3 equally-spaced double rows of stitches. The band shall then be folded lengthwise in the center, with the longer yarns on the outside and the shorter yarns on the back, and securely sewn with 2 rows of stitches in such a manner as to form a tubular opening for the frame to pass through.

**3.3 Workmanship.**—The mops shall be clean and free from defects which might affect the appearance or which might impair the serviceability.

## 4. SAMPLING, INSPECTION, AND TEST PROCEDURES

**4.1 Sampling for lot acceptance.**

**4.1.1** *Lot.*—All complete mops or component parts of the same type and size presented at one time shall be considered a lot for the purpose of acceptance, inspection, and tests.

**4.1.2** *Sampling for inspection.*—A random sample of mops or component parts shall be taken in accordance with table I from each lot offered for Government inspection of visual and dimensional characteristics. A component part shall be considered the item (complete mop, mophead section, handle, and block) as delivered.

**4.1.3** *Sampling for tests.*—A random sample of complete mops or component parts shall be taken from each inspection lot in accordance with table II.

**4.1.3.1** *Yarn (for mopheads).*—Unless otherwise specified, when complete mops or mopheads are delivered, at least 165 yards of mop yarn

TABLE I.—*Sampling for visual and dimensional inspection*

| Number of mops or component parts in lot | Number of mops or component parts in inspection sample | Major defectives | | Total defectives | |
|---|---|---|---|---|---|
| | | Acceptance number | Rejection number | Acceptance number | Rejection number |
| 65 and under | 7 | 0 | 1 | 0 | 1 |
| 66 to 180 | 25 | 1 | 2 | 3 | 4 |
| 181 to 300 | 35 | 2 | 3 | 5 | 6 |
| 301 to 500 | 50 | 3 | 4 | 6 | 7 |
| 501 to 800 | 75 | 4 | 5 | 9 | 10 |
| 801 to 1300 | 110 | 6 | 7 | 12 | 13 |
| 1301 and over | 150 | 8 | 9 | 17 | 18 |

TABLE II.—*Sampling for tests*

| Number of mops or component parts in lot | Number of mops or component parts in test sample | Acceptance number (nonconforming) | Rejection number (nonconforming) |
|---|---|---|---|
| 180 and under | 2 | 0 | 1 |
| 181 to 500 | 3 | 0 | 1 |
| 501 to 1300 | 5 | 0 | 1 |
| 1301 to 3200 | 7 | 0 | 1 |
| 3201 to 8000 | 10 | 0 | 1 |
| 8001 and over | 15 | 1 | 2 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

of the same lot of yarn used for the mophead shall be furnished by the contractor for test purposes.

4.1.3.2 *Twill or drill.*—Unless otherwise specified, when complete mops or mopheads are delivered, at least one piece of fabric or woven tape 1 yard by the full width of the material and of the same lot of fabric or tape used for the mophead shall be furnished by the contractor for test purposes.

4.1.3.3 *Thread.*—Unless otherwise specified, when complete mops or mopheads are delivered, at least 610 yards of each size sewing thread of the same lot of thread used in the stitching of the mophead shall be furnished by the contractor for test purposes.

| Examine | Defect | Classification | |
|---|---|---|---|
| | | Major | Minor |
| HANDLES | Not hardwood, Southern yellow pine, or Douglas Fir | | X |
| | Any decay or brashness (appearing as soft, spongy or punky wood) | X | |
| | Slope of grain steeper than 1 inch in 15 inches or dip grain more than one-half the diameter | | X |
| | Not close grain | | X |
| | Any knot hole or loose knot | X | |
| | Crook (warp or bow) more than three-eights of an inch per full length of handle (measure at point of greatest distance from straight line) | X | |
| | Crook (warp or bow) more than one-fourth but not more than three-eights of an inch per full length of handle | | X |
| | Any tight or firmly encased knot one-eighth of an inch or more in diameter | | X |
| | Any season check, shake, or split open or visibly concealed with filler | X | |
| | Any wane (bark or lack of wood) | X | |
| | Pronounced streak or stain obscuring grain of wood | | X |
| | Any worm hole, larva channel, or pocket open or visibly concealed with filler | | X |
| | Loose, raised, or torn grain producing a rough surface along upper two-thirds of handle | X | |
| | Dimension not as specified | X | |
| FINISH OF HANDLE | Top end not rounded | | X |
| | Out of round (i. e. any flat area or lack of uniform diameter throughout length) | | X |
| | Consecutive machine skip, tool mark, or gouge along upper two-thirds of handle | X | |
| | Occasional machine skip, tool mark, or gouge along upper two-thirds of handle | | X |
| | Not waxed or varnish or lacquer coated | | X |
| | Not natural finish (i. e. varnish, lacquer or wax, not clear transparent coating) | | X |
| HANDLE FERRULE | Missing | X | |
| | Dimensions not as specified | | X |
| | Damaged or malformed, affecting serviceability | X | |
| BLOCK (TYPE R MOP ONLY). | Not solid wood construction, or not hardwood | | X |
| | Dimensions not as specified | X | |
| | Any decay or brashness (appearing as soft, spongy, or punky wood) | X | |
| | Not square edge (i. e. miscut, warped, or twisted) | | X |
| | Any knot hole or loose knot | X | |
| | Any tight or firmly encased knot one-eighth of an inch or more in diameter | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification | |
|---|---|---|---|
| | | Major | Minor |
| BLOCK (TYPE R MOP ONLY). | Any season check, shake, or split open or visibly concealed with filler | X | |
| | Any wane (bark or lack of wood) | X | |
| | Any worm hole, larva channel, or pocket open or visibly concealed with filler | | X |
| | Loose, raised, or torn grain on surface exposed when in use | | X |
| | Slope of grain steeper than 1 inch in 10 inches, or dip grain through one-half thickness of block | | X |
| | Corners not rounded or chamfered | | X |
| | Consecutive machine skip, tool mark, or gouge appearing on exposed surface when in use | X | |
| | Occasional machine skip, tool mark, or gouge appearing on exposed surface when in use | | X |
| | Not coated with varnish, shellac, or lacquer | | X |
| | Block fitting missing | X | |
| | Block fitting damaged or malformed, affecting serviceability | X | |
| | Block fitting not securely attached to block as specified | | X |
| | Block fitting too tight, not permitting proper swivel action; or too loose not holding mophead section at firm working angle | | X |
| | Two or more snap fastener studs missing | X | |
| | One snap fastener stud missing | | X |
| | Two or more snap fastener studs not driven flush or improperly inserted (which may be expected to work loose), or damaged or malformed, affecting proper function | X | |
| | One snap fastener stud not driven flush or improperly inserted (which may be expected to work loose), or damaged or malformed affecting proper function | | X |
| FRAME (TYPE I MOP ONLY). | Not triangular shape | | X |
| | Dimensions not as specified | X | |
| | Does not fit securely into handle fitting clamp | | X |
| | Omitting corrosive-resisting coating | X | |
| MOPHEAD (TYPE R) | Any section missing | X | |
| | Dimensions not as specified | X | |
| | Snap fasteners not type specified, or visible surface not nickel plated | | X |
| | Two or more snap fasteners missing | X | |
| | One snap fastener missing | | X |
| | Two or more snap fasteners damaged or malformed affecting proper function, or loose or improperly attached (which may be expected to become detached) | X | |
| | One snap fastener damaged or malformed affecting proper function, or loose or improperly attached (which may be expected to become detached) | | X |
| | One or more snap fasteners misplaced (i. e. distance between caps not as specified or not compensated for by position of stud) | | X |
| | Not clean (rancid or objectionable odor) | | X |
| | Any insect infestation | | X |
| | Spot, soiled, or stained | | X |
| | Banding fabric not folded in center in lengthwise direction and not stitched with a double row of stitches | | X |
| | Stitching less than 5 stitches per inch | | X |
| | Less than 3 rows of double stitches used to secure yarn (strips) to banding fabric | | X |
| | Raw edge not turned under one-fourth of an inch and not caught in row of stitches | | X |
| | Ends of tape or fabric not folded under and not caught by stitches | | X |
| | Spacing between rows of stitches not as specified | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

| Examine | Defect | Classification | |
|---|---|---|---|
| | | Major | Minor |
| MOPHEAD (TYPE R)---- | Mop yarn not caught by stitching that may be expected to pull out if caught or snagged (simulate by attempting to pull yarns out by hand | | X |
| | Any weakening material defect such as hole, tear, cut, smash, float, or slub which may develop into a hole | X | |
| | Fabric pieced or spliced within a section | | X |
| | Color of yarn or fabric not natural | | X |
| MOPHEAD (TYPE T)---- | Not clean (i. e. rancid or objectionable odor) | | X |
| | Any insect infestation | | X |
| | Spotted, soiled or stained | | X |
| | Banding fabric not folded in center in lengthwise direction and not stitched with a double row of stitches in a manner to form a tubular opening for the frame | | X |
| | Stitching not lock type, or less than 5 stitches per inch | | X |
| | Less than 3 rows of double stitches used to secure yarn (strings) in banding fabric | | X |
| | Raw edge not turned under one-fourth of an inch and not caught in row of stitches | | X |
| | Color of yarn or fabric not natural | | X |
| | Yarn not treated with mineral oil, when specified | | X |

**4.2 Inspection.**—Inspection shall be made at the point of delivery or at the factory, at the discretion of the purchasing agent.

**4.2.1** *Visual and dimensional inspection.*—Each of the mops or component parts taken in accordance with table I shall be visually and dimensionally inspected to verify compliance with this specification, and if the number of defective items in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

**4.3 Testing procedures.**

**4.3.1** *Lot acceptance.*—Each of the mops or component parts taken in accordance with table II shall be tested to verify compliance with this specification, and if the number of nonconforming items in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

**4.3.2** *Tests.*—Tests shall be conducted in accordance with the applicable methods described in Federal Specification V-T-276, Military Specification MIL-W-6110 (Wood, Determination of Moisture Content), and the following methods described in Federal Specification CCC-T-191:

| Test | Method No. |
|---|---|
| Standard condition | Section 4 |
| Weight per square yard | 5041 |
| Breaking strength (grab method) | 5100 |
| Shrinkage in laundering | 5550 |
| Length per pound (thread) (mop yarn) | 4010 |
| Breaking strength (thread) | 4102 |
| Twist; ply yarns (mop yarn) | 4054.1 |
| Breaking strength (mop yarn) | 4100 |
| Nonfibrous materials | 2611.1 |

## 5. PREPARATION FOR DELIVERY

**5.1 Packaging.**

**5.1.1** *Level A.*

**5.1.1.1** *Type T (oiled).*—Each type T mophead shall be securely wrapped in 30 pound greaseproof paper.

**5.1.1.2** *Types R and T (not oiled).*—Each mophead shall be packaged in accordance with the manufacturer's commercial practice.

**5.1.2** *Level C.*

**5.1.2.1** *All types.*—All types of mops shall be packaged in accordance with 5.1.1.2.

**5.2 Packing.**

**5.2.1** *Level A.*



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

5.2.1.1 *Type R.*—Unless otherwise specified, twelve (12) complete units shall be packed in a style FOL (less than 3 inches), compliance symbol V3s, solid fiberboard container, constructed, sealed and strapped in conformance with Federal Specification PPP-B-636.

5.2.1.2 *Type T.*—Unless otherwise specified, twelve (12) complete units shall be packed in a style FOL (less than 3 inches), compliance symbol V3s, solid fiberboard container constructed, sealed and strapped in conformance with Federal Specification PPP-B-636.

5.2.1.3 *Mopheads.*—Twelve (12) mopheads shall be packed in a snug-fitting, style RSC, 200 pound bursting strength corrugated fiberboard container or a solid fiberboard container in conformance with style RSC of Federal Specification PPP-B-636. Each container shall be securely sealed with an adhesive commercially used for the specific product being packed, by application throughout the entire area of contact between the flaps. Six (6) containers (72 mopheads) shall be overpacked in a style RSC, compliance symbol V3s solid fiberboard container constructed, sealed and in conformance with Federal Specification PPP-B-636.

5.2.2 *Level B.*

5.2.2.1 *Type R only.*—Unless otherwise specified, the mops shall be detached from the handles and twelve (12) complete units shall be packed in a snug-fitting fiberboard container constructed in accordance with style RSC (275 p. s. i.) of Federal Specification PPP-B-636.

5.2.2.1.1 *Strapping.*—Each container shall have three flat steel straps one-half of an inch wide by 0.015 inch thick applied girthwise around the container. Spacing shall be such as to divide the length into 4 equal portions. Alternatively, each container shall be reinforced by application of strips of pressure sensitive tape in conformance with Federal Specification PPP-T-97 and Appendix thereto.

5.2.2.2 *Type T only.*—Unless otherwise specified, twelve (12) complete units shall be packed in a style OLC (overlap slotted box) with top and bottom flaps overlapping to one inch less than the width of the container, 275 pound bursting strength, fiberboard container in conformance with Federal Specification PPP-B-636. Each container shall be provided with scored end trays which shall extend three inches along each side panel, of same material as the container. Six (6) handles shall be placed in box as bottom layer. Twelve (12) mopheads and frames shall then be placed in box. The remaining six (6) handles shall then be placed in a layer on top of mopheads and frames.

5.2.2.2.1 *Strapping.*—Each container shall have three flat steel straps one-half of an inch wide by 0.015 inch thick applied girthwise around the container. Spacing shall be such as to divide the length into four equal parts. Alternatively, each container shall be reinforced by the application of strips of pressure sensitive tape in conformance with Federal Specification PPP-T-97 and Appendix thereto.

5.2.2.3 *Mopheads.*—Unless otherwise specified, twelve (12) mopheads shall be packed in a snug-fitting style RSC, 200 pound p. s. i. bursting strength, corrugated or solid fiberboard container in conformance with Federal Specification PPP-B-636. Each container shall be sealed with an adhesive commercially used for the specific product being packed, by application throughout the entire area of contact between flaps.

5.2.3 *Level C.*—The commodity shall be packed in a manner acceptable to common carriers for safe transportation to point of destination specified in shipping instructions, at the lowest transportation rate for such supplies.

5.3 **Marking.**—Unless otherwise specified by Civilian Government agencies, interior packages and shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

5.4 Federal Standard No. 102, shall be referred to for definitions and applications of the various levels of packaging protection for supplies and equipment.

6. NOTES

6.1 **Ordering data.**—Purchasers should specify the type and size (see 1.2), if oil treated yarn is required (see 3.2.3.1.1), the kind of packaging, packing, and marking (see sec. 5), and should exercise any desired options offered herein (see 4.1.3.1, 4.1.3.2, 4.1.3.3, 4.2, and 5.3).

6.2 This specification covers rectangular dry floor mops 17 and 27 inches in width. Similar type mops are available in wider widths



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

as indicated in the General Services Administration's Stores Stock Catalog (item numbers 7920–634–4672 and 7920–634–4674).

**6.3 Transportation description.**—The transportation description applicable to this item is:

Mops or mop parts, not otherwise indexed by name.

Carload minimum weight 24,000 pounds, subject to Rule 34, Uniform Freight Classification.

Truckload minimum weight 24,000 pounds.

**6.4** For determining the viscosity of oil required, it is suggested that the contractor use ASTM Standard D–88–53 Viscosity by Means of The Saybolt Viscosimeter.

**Notice.**—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

**MILITARY INTEREST:**

**Army—E Q**
**Navy—S**
**Air Force.**

U. S. GOVERNMENT PRINTING OFFICE : 1960

Copies of this specification may be purchased for 10 cents each.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.