T–M–570
FEBRUARY 7, 1955
SUPERSEDING
Int. Fed. Spec. T–M–00570 (GSA–FSS)
7 October 1953

FEDERAL SPECIFICATION

MOP, DUSTING, COTTON, SLIP-ON (WITH HANDLE)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 **Scope.**—The slip-on cotton-yarn dusting mop covered by this specification is primarily intended for use in dusting floors.

1.2 **Classification.**

1.2.1 *Type.*—The slip-on cotton-yarn dusting mop covered by this specification shall be of but one type (see figures 1, 2, and 3).

1.2.2 *Sizes.*—The mop shall be furnished in the following sizes (length from yarn tip to yarn tip), as specified:

Size 16.—16 inches.
Size 19.—19 inches.
Size 23.—23 inches.
Size 30.—30 inches.

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications:

V–T–276—Thread; Cotton.
UU–T–116—Tape, Paper, Gummed, Water-Resistant.
CCC–T–191—Textile Test Methods.
LLL–B–631—Boxes; Fiber, Corrugated (for Domestic Shipment).
PPP–T–97—Tape; Pressure-Sensitive Adhesive, Filament Reinforced.

Military Specification:

JAN–P–108—Packaging and Packing for Overseas Shipment—Boxes, Fiberboard (V-Board and W-Board) Exterior and Interior.

Military Standards:

MIL–STD–105—Sampling Procedures and Tables for Inspection by Attributes.
MIL–STD–129—Marking for Shipments and Storage.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards, and at the prices

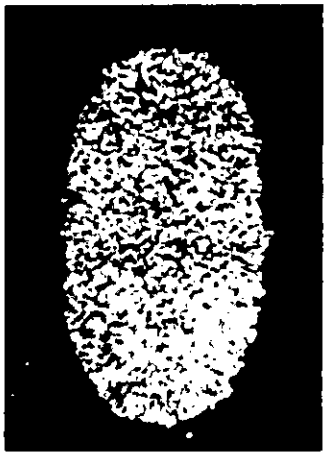


FIGURE 1

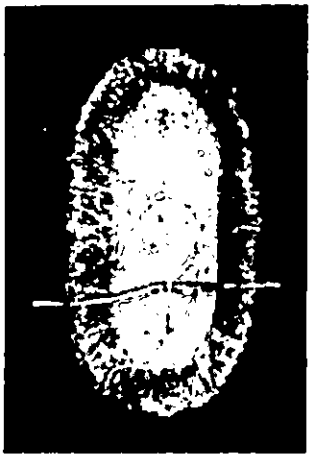


FIGURE 2



FIGURE 3

312319—55—No. 205

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purpose are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies.

(Copies of *Military specifications and standards* required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Materials.

3.1.1 *Yarn for mop head.*—The yarn used in the mophead shall be not less than 4-ply cotton having not less than 3.5 turns per inch and a breaking strength of not less than 12 pounds. The yarn shall weigh not less than 615 yards per pound.

3.1.2 *Sewing thread.*—Sewing thread shall conform to the requirements of Federal Specification V–T–276 for type IA1, 4-cord, ticket number 24.

3.1.3 *Twill or drill.*—The twill or drill used for the mophead shall be of cotton weighing not less than 6.8 ounces per square yard. There shall be not less than 70 yarns per inch in the warp and not less than 58 yarns per inch in the filling. The breaking strength shall be not less than 140 pounds in the warp and not less than 90 pounds in the filling. The fabric shall shrink not more than 1 percent in either the warp or filling direction.

3.1.4 *Tape for ties.*—Tape for ties shall be a tubular braid of unbleached cotton yarns. The tape shall measure not less than ¼ inch in width.

3.1.5 *Binding.*—Binding shall be of the same material as the mophead fabric and shall be cut on the bias (see 3.1.3).

3.1.6 *Handle.*—The handle shall be of close-grained hardwood; or softwood of Douglas fir or southern yellow pine, and shall be dried to a moisture content of not more than 12 percent. The handle shall be straight and free from warp, decay, knots, checks, shakes, splits, slivers, bark pocket, and larva channels or pockets. The slope of grain shall be not steeper than 1 inch in 15 inches unless the dip-grain does not exceed half the diameter of the handle.

3.1.6.1 *Finish.*—The surface of hardwood and softwood handles shall be sanded smooth and waxed. Douglas fir and southern yellow pine handles shall be coated with not less than two coats of clear lacquer or varnish.

3.1.7 *Handle fittings.*

3.1.7.1 *Sleeve.*—The sleeve shall be of seamless steel or aluminum tubing having a thickness of 0.035 plus or minus 0.004 inch. If steel is used, it shall be zinc or cadmium-plated.

3.1.7.2 *Bail.*—The bail shall be of zinc or cadmium-plated spring-steel wire having a thickness of 0.162 plus or minus 0.004 inch.

3.1.7.3 *Base plate.*—The base plate shall be of zinc or cadmium-plated steel 0.037 plus or minus 0.004 inch thick.

3.1.7.4 *Swivel plate.*—The swivel plate shall be of zinc or cadmium-plated steel having a thickness of 0.050 plus or minus 0.004 inch.

3.1.7.5 *Rivet.*—The rivet shall be of steel having a shank approximately ¼ inch thick and a head approximately ½ inch in diameter. It shall be approximately $1\frac{1}{16}$ inch long.

3.1.7.6 *Washers.*—Washers shall be of steel, and shall be either a flat type or recessed type.

3.1.7.6.1 *Flat type.*—Flat-type washers shall be approximately ½ inch in diameter.

3.1.7.6.2 *Recessed types.*—Recessed-type washers shall be approximately $1\frac{1}{16}$ inch in diameter.

3.1.7.7 *Spring.*—The spring shall be of the compression type and shall be of steel.

3.2 Construction.—The mop assembly shall consist of a removable mophead, handle, and frame. (See figs. 1, 2, and 3.)

3.2.1 *Mophead.*—The mophead shall be made from two pieces of twill or drill. One

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:19Z
Check the source to verify that this is the current version before use.

piece, forming the bottom, shall have three rows of yarn securely sewn thereon. The other piece forming the top shall have an opening for the insertion of the frame. The opening shall be bound. Sizes 16, 19, and 23 mops shall have two ties, one on each side of the opening, attached by means of bartacking. Size 30 mops shall have four ties, two on each side. Ties shall be approximately 8 inches long. The two pieces, top and bottom, shall be securely bound together around the edges, thus giving the appearance of a slipper. After binding together, an additional row of yarn shall be sewed around the outer edge. The yarns, after being sewed to the bottom section, shall be not less than 2½ inches long. The sweep (mop surface) of the finished mops shall measure not less than 9½ inches in width, and 16, 19, 23, and 30 inches in length for the respective sizes.

3.2.2 *Handle and frame*—The handle shall be 53 inches, plus or minus ½ inch, long and not less than ⅞ nor more than 15/16 inch thick. One end shall be square, routed, and grooved for attachment of the bail. The other end of the handle shall be rounded. The handle shall be smooth and waxed, or coated with transparent lacquer (see 3.1.6.1). The frame and handle fittings, consisting of a bail, wire frame, swivel plate, face plate, rivet, compression spring, washers, and sleeve, shall be as follows: The bail shall be shaped so that it will penetrate the routing in the handle, recess itself in the grooves, and fit into the holes in the swivel plate, thus holding the frame by means of spring action. The bail shall be flared in opposite directions on the ends. The swivel plate shall be approximately 2⅝ inches in diameter, have four equally spaced position-holes, and two upturned lips with holes for insertion of the prongs of the bail. The base plate shall be 2⅞ inches plus or minus 1/32 inch wide. The base plate shall have four equally spaced impressions to match the holes in the swivel. The ends of the plate shall be curled around the wire frame which is bent in the form of an ellipse. The wire frame shall measure 9, 12, 15, and 22 inches from tip to tip for the sizes 16, 19, 23, and 30 mops, respectively. A tolerance of plus or minus ¼ inch will be permitted. The width, including the base plate, for all sizes shall be 3⅜ inches plus or minus 1/32 inch. The sleeve shall be not less than 1 9/16 inches long with an inside dimension of 15/16 plus or minus 1/64 inch. One end of the sleeve shall be flared. The sleeve shall be pierced to prevent slippage.

3.3 **Workmanship.**—The mops shall be clean and free from defects which affect the appearance or which might impair the serviceability.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 **Sampling.**

4.1.1 *Nonmilitary.*—Not less than 2 units shall be taken at random from each lot of 1,000 units or fraction thereof, offered for delivery. A unit shall consist of the item (complete mop, mophead, or handle and frame) as delivered.

4.1.1.1 *Thread.*—When complete mops or mopheads are delivered, at least 610 yards of sewing thread of the same lot used in the stitching of the mophead shall be furnished by the contractor for test purposes.

4.1.1.2 *Twill or drill.*—When complete mops or mopheads are delivered, at least one piece of fabric 1 yard by the full width of the material and of the same lot used for the mophead shall be furnished by the contractor for test purposes.

4.1.1.3 *Yarn (for mophead).*—When complete mops or mopheads are delivered, at least 165 yards of mop yarn of the same lot used for the mophead shall be furnished by the contractor for test purposes.

4.1.2 *Military.*—Sampling procedures shall be in accordance with Military Standard MIL-STD-105, and as specified in the invitation for bids.

4.2 **Inspection.**—Inspection shall be made at the point of delivery or at the factory, at the discretion of the purchasing agent.

4.3 **Tests.**—Tests shall be conducted in accordance with the applicable methods described in Federal Specification V–T–276, and the following methods described in CCC–T–191:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

Test	Method No.
Standard condition	Section 4.
Weight per square yard	5041.
Yarns per inch	5050.
Breaking strength (grab method)	5100.
Shrinkage in laundering	5550.
Length per pound (thread) (mop yarn)	4010.
Breaking strength (thread)	4102.
Twist; ply yarns (mop yarn)	4054.1.
Breaking strength (mop yarn)	4100.

5. PREPARATION FOR DELIVERY

5.1 Packaging.—Mops and handles shall be packaged in accordance with good commercial practice.

5.2 Packing.

5.2.1 *Domestic shipment (immediate use).*

5.2.1.1 *Mops and handles (complete) and mop handles (only).*—Twelve mops and handles (complete), or mop handles only shall be packed and fully enclosed in a 275-pound test carton, full flap, A or B flute in accordance with Federal Specification LLL-B-631, except that the carton shall be the type commonly known as scored flap. Each of the scored flaps, when folded in the proper position shall be sealed with glue to insure their holding position.

5.2.1.1.1 *Metal strapping.*—Each carton shall have three metal straps ½ inch wide by 0.015 inch thickness, or thre strips of pressure-sensitive tape complying with Federal Specification PPP-T-97.

5.2.1.2 *Mopheads (only).*—Twelve mopheads shall be packed in a 200-pound test corrugated carton, RSC (regular slotted container), in accordance with Federal Specification LLL-B-631. Each container shall be sealed with 3-inch water-resistant gummed-paper tape in accordance with Federal Specification UU-T-116.

5.2.2 *Domestic shipment (storage).*

5.2.2.1 *Mops and handles (complete).*—The mops shall be detached from the handles. Twelve complete units shall be packed in a snug-fitting style OLC (overlap slotted box) with outer flaps overlapping one inch, 275-pound bursting strength, corrugated fiberboard container in conformance with Federal Specification LLL-B-631.

5.2.2.1.1 *Metal strapping.*—Each container shall have three flat steel strips ½ inch wide by 0.015 inch thickness applied girthwise around the container. Spacing shall be such as to divide the length into four equal portions. Alternatively, each container shall be reinforced by the application of strips of pressure sensitive tape in conformance with Federal Specification PPP-T-97 and appendix thereto.

5.2.2.2 *Mopheads (only).*—Twelve mopheads shall be packed in a corrugated-fiberboard container, style RSC, 200-pound bursting strength, in conformance with Federal Specification LLL-B-631. Each container shall be sealed with adhesive throughout the entire area of contact between the flaps.

5.2.3 *Overseas shipment.*

5.2.3.1 *Nonmilitary.*—Mops with handles and mopheads only shall be packed in accordance with good commercial practice.

5.2.3.2 *Military.*

5.2.3.2.1 *Mops and handles (complete).*—Twelve complete units shall be packed in a style FOL (less 3 inches), compliance symbol V3s, solid fiberboard container, constructed, sealed and strapped in conformance with Military Specification JAN-P-108.

5.2.3.2.2 *Mopheads (only).*—Six (6) containers (72 mopheads) packed as specified in 5.2.2.2 shall be overpacked in a style RSC, compliance symbol V3s, solid fiberboard container, constructed, sealed, and strapped in conformance with Military Specification JAN-P-108.

5.3 Marking.

5.3.1 *Nonmilitary.*

5.3.1.1 *Shipping containers.*—Shipping containers shall be marked with the name and size of the item, the quantity contained therein, the name of the contractor, the number of the contract or order, the name and address of the consignee, and the gross weight.

5.3.2 *Military.*—Interior packages and shipping containers shall be marked in accordance with Military Standard MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 **Ordering data.**—Purchasers should specify the size (see 1.2.2), place of inspection (see 4.2), the kind of packaging, packing and marking (see 5 and 6.4), and should exercise any desired options offered herein (see 6.2).

6.2 **Bid sample.**—If deemed advisable, purchasers should require bidders to submit a sample of the mops which should be guaranteed by the bidders to be a true sample of the mops which they propose to furnish under their contract. Samples will be returned to unsuccessful bidders. The sample submitted by the bidder to whom the contract is awarded will become Government property and will be retained as a sample to show design, workmanship, and material.

6.3 **Transportation description.**—The transportation description applicable to these items is:

Mops or mop parts, not otherwise indexed by name.
Carload weight 24,000 pounds, subject to Rule 34, Uniform Freight Classification.
Truckload weight 24,000 pounds.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

6.4 The following descriptive packaging applications are furnished for informational purposes:

6.4.1 *Domestic shipment (immediate use.)*—Applies to that material required for immediate use without storage or reshipment by the initial domestic receiving activity.

6.4.2 *Domestic shipment (storage).*—Applies to that material for storage and reshipment to a domestic receiving activity not involving sea transportation.

6.4.3 *Overseas shipment.*—Applies to that material to be transported by oceangoing or coastwise vessel and handled, issued, and stored in the military supply system or in a nonmilitary supply system.

MILITARY INTEREST:
Army—Q
Navy—S
Air Force.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:19Z
Check the source to verify that this is the current version before use.