MILITARY SPECIFICATION SHEET


CRYSTAL UNIT, QUARTZ, CR-156/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the crystal unit described herein shall consist of this specification and the latest issue of MIL-C-3098.

(B) INACTIVE FOR NEW DESIGN

Pertinent characteristics: 35.000400 MHz; fifth overtone; controlled; series.

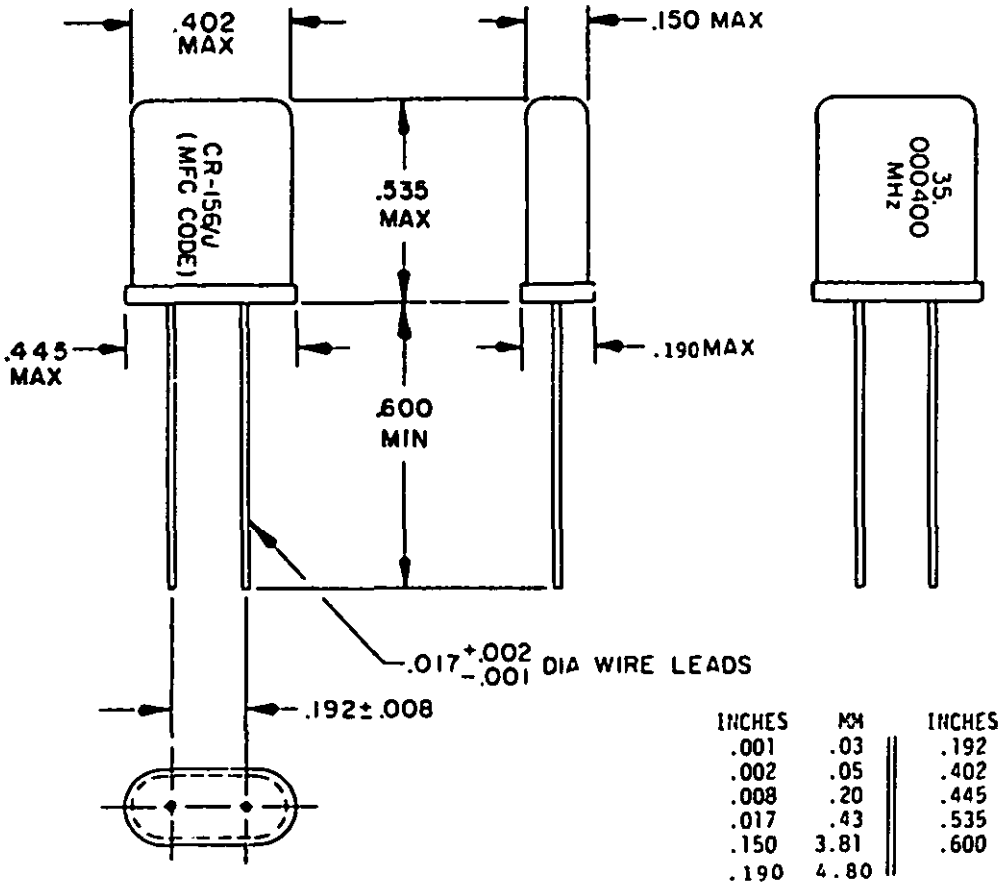

INCHES	MM	INCHES	MM
.001	.03	.192	4.88
.002	.05	.402	10.21
.008	.20	.445	11.30
.017	.43	.535	13.59
.150	3.81	.600	15.24
.190	4.80		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. The type designation, frequency, and code-designating characters shall be not less than .038 (.97 mm) in height and not less than .027 (.69 mm) in width.

FIGURE 1. Crystal unit - CR-156/U.

(B) denotes changes

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:59Z
Check the source to verify that this is the current version before use.

TABLE I. Requirements.

Requirement	Specified value or condition
Holder	HC-43/U (MIL-H-10056/30)
Dimensions, marking, and configuration	See figure 1
Frequency	35.000400 MHz
Capacitance, shunt	7 pF, maximum
Frequency tolerance	
Operating temperature range	±10 ppm
Room temperature	±80 ppm
Frequency stability	±5 ppm
Equivalent resistance	60 ohms, maximum
Mode of oscillation	Fifth mechanical overtone
Reference temperature	85°C ±1°C
Temperature ranges:	
Operating	+80°C to +90°C, inclusive
Operable	-55°C to +80°C, inclusive
Government reference standard test set	TS-683/TSM
Calibration values:	
Resistance	60 ohms
Resistor voltage drop	.35 volt
Drive level, rated	2.0 mW max.
Shock:	
Frequency change permitted	±5 ppm
Equivalent resistance change permitted	±10 percent
Thermal shock:	
Frequency change permitted	±5 ppm
Equivalent resistance change permitted	±10 percent
Vibration: 1/	
Frequency change permitted	±5 ppm
Equivalent resistance change permitted	±10 percent
Aging:	
Frequency change permitted	±3 ppm 10^{8} per day or less the first year

1/ Method 201, MIL-STD-202.

(B) QUALITY ASSURANCE PROVISIONS:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Group A tests of MIL-C-3098 shall be applicable.

NOTE: This item was formerly manufactured to the ITT drawing 1133151.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI, AR, SM
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Navy - AS, CG, MC, OS
Air Force - 17, 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5955-0617-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:59Z
Check the source to verify that this is the current version before use.