INCH POUND

MIL-C-3098/136C
23 December 1991

SUPERSEDING
MIL-C-3098/136B
8 March 1983

MILITARY SPECIFICATION SHEET


CRYSTAL UNIT, QUARTZ, CR156/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-3098.

INACTIVE FOR NEW DESIGN

Pertinent characteristics: 35.000400 MHz; fifth overtone; controlled; series.

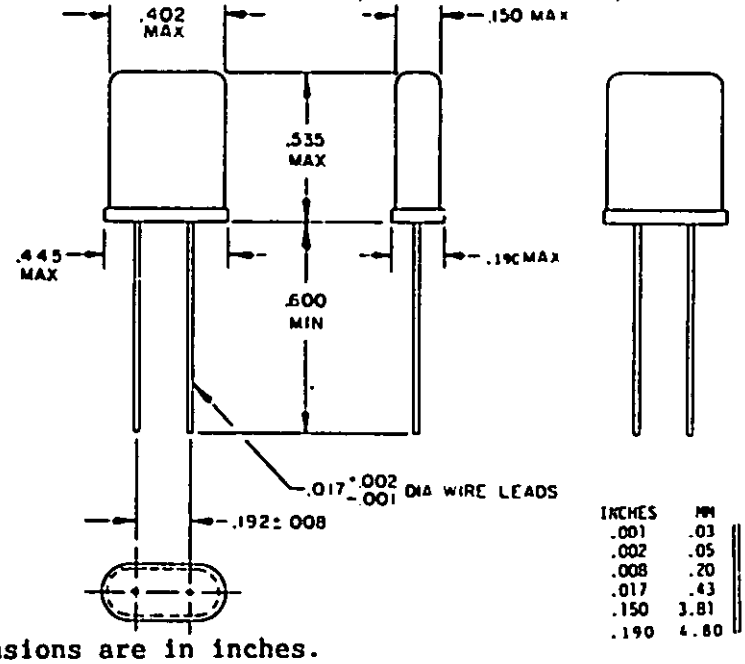

INCHES	MM	INCHES	MM
.001	.03	.192	4.88
.002	.05	.402	10.21
.008	.20	.445	11.30
.017	.43	.535	13.59
.150	3.81	.600	15.24
.190	4.80		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-C-3098.

FIGURE 1. Crystal unit - CR156/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Holder: HC-43/U (MIL-H-10056/30).

Dimensions, marking, and configuration: See figure 1.

Frequency range: 35.000400 MHz.

Frequency tolerance:
Operating temperature range: ±10 ppm.
Room temperature: ±80 ppm.

Equivalent resistance: 60 ohms, maximum.

Mode of oscillation: fifth mechanical overtone.

Reference temperature: +85°C ±10°C.

Temperature range:
Operating: +80°C to +90°C, inclusive.
Operable: -55°C to +80°C, inclusive.

Drive level: 2.0 mW, maximum.

Capacitance, shunt: 7.0 pF, maximum.

Shock:
Frequency change permitted: ±5 ppm.
Equivalent resistance change permitted: ±10 percent.

Vibration: Method 201 of MIL-STD-202.
Frequency change permitted: ±5 ppm.
Equivalent resistance change permitted: ±10 percent.

Temperature cycling:
Frequency change permitted: ±5 ppm.
Equivalent resistance change permitted: ±10 percent.

Aging:
Frequency change permitted: ±3 ppm, 10^{-8} per day or less the first year.

QUALITY ASSURANCE PROVISIONS:
Qualification inspection: Not applicable for this specification.
Quality conformance inspection: Group A tests of MIL-C-3098 shall be applicable.

NOTE: This item was formerly manufactured to the ITT drawing 1133151

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:59Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
  Army - ER
  Navy - EC
  Air Force - 85

Review activities:
  Army - AR, MI, SM
  Navy - SH
  Air Force - 99
  DLA - ES

User activities:
  Navy - AS, CG, MC, OS
  Air Force - 17, 19

Preparing activity:
  Army - ER

Agent:
  DLA - ES

(Project 5955-0667)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:59Z
Check the source to verify that this is the current version before use.