INCH POUND

MIL-C-3098/139C
23 December 1991
MIL-C-3098/139B
8 March 1983


MILITARY SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR158/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-3098.

Pertinent characteristics: 200 to 220 MHz; seventh overtone; noncontrolled; series.

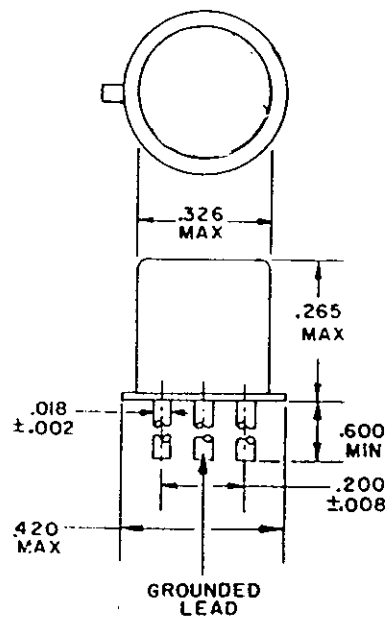

INCH	MM
.002	.05
.008	.20
.018	.46
.200	5.08
.265	6.73
.326	8.28
.420	10.67
.600	15.24

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The crystal unit shall not be trimmed after sealing.
4. Marking shall be in accordance with MIL-C-3098.

FIGURE 1. Crystal unit - CR158/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Holder: HC-35/U (MIL-H-10056/21).

Dimensions, marking, and configuration: See figure 1.

Frequency range: 200 to 220 MHz, inclusive.

Frequency tolerance:
Operating temperature range: ±50 ppm.
Room temperature: ±30 ppm.

Equivalent resistance: 150 ohms, maximum.

Mode of oscillator: Seventh mechanical overtone.

Temperature range:
Operating: +80°C to +90°C, inclusive.
Operable: -55°C to +105°C, inclusive.

Drive level:
Operating-- 0.1 mW.
Maximum-- 0.5 mW.

Capacitance, shunt: 4.5 pF, maximum.

Shock:
Frequency change permitted: ±5 ppm.
Equivalent resistance change permitted: ±10 percent.

Vibration: Method 201 Of MIL-STD-202, test condition A.
Frequency change permitted: ±5 ppm.
Equivalent resistance change permitted: ±10 percent.

Temperature cycling:
Frequency change permitted: ±5 ppm.
Equivalent resistance change permitted: ±10 percent.

Aging:
Frequency change permitted: ±5 ppm.

QUALITY ASSURANCE PROVISIONS:
Qualification inspection: Not applicable for this specification.
Quality conformance inspection: Group A tests of MIL-C-3098 shall be applicable.
Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:00Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI, SM
Navy - SH
Air Force - 99
DLA - ES

User activities:
Navy - AS, CG, MC, OS
Air Force - 17, 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5955-0664)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:00Z
Check the source to verify that this is the current version before use.