INCH POUND

MIL-C-3098/141B
23 December 1991
SUPERSEDING
MIL-C-3098/141A
8 March 1983

MILITARY SPECIFICATION SHEET


CRYSTAL UNIT, QUARTZ, CR160/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-3098.

INACTIVE FOR NEW DESIGN

Pertinent characteristics: 45 to 100 MHz; fifth overtone; controlled; series.

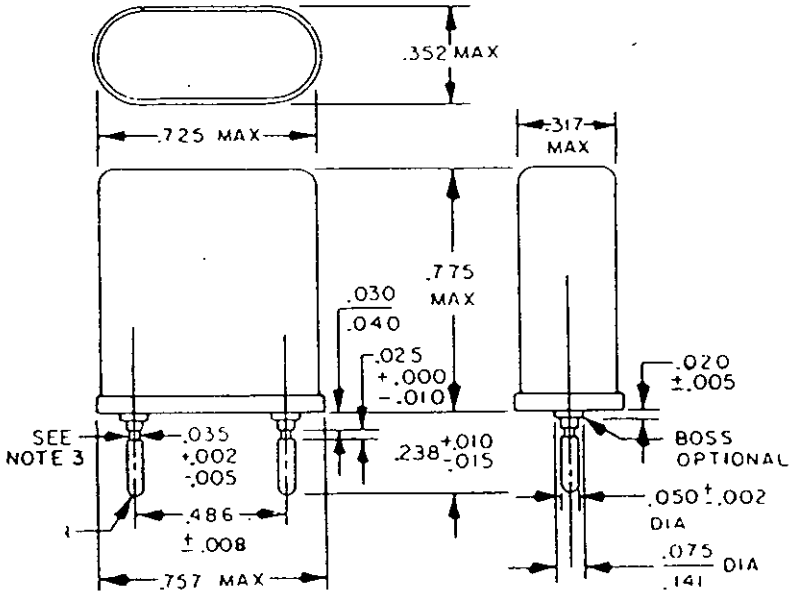

INCHES	MM	INCHES	MM
.002	.05	.050	1.27
.005	.13	.075	1.91
.008	.20	.141	3.58
.010	.25	.238	6.05
.015	.38	.317	8.05
.020	.51	.352	8.94
.025	.64	.486	12.34
.030	.76	.725	18.42
.035	.89	.757	19.23
.040	1.02	.775	19.69

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The pin undercut may be omitted.
4. Marking shall be in accordance with MIL-C-3098.

FIGURE 1. Crystal unit - CR160/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:01Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Holder: HC-36-2/U (MIL-H-10056/23-2).

Dimensions, marking, and configuration: See figure 1.

Frequency range: 45 to 100 MHz, inclusive.

Frequency tolerance: ±5 ppm.

Equivalent resistance: 40 ohms, maximum.

Mode of oscillator: Fifth overtone.

Temperature range:
Operating (controlled): +70°C to +80°C, inclusive.
Operable: -55°C to +70°C, inclusive.

Drive level: 1.0 ±0.2 mW.

Capacitance, shunt: 3 pF.

Shock:
Frequency change permitted: ±2.5 ppm.
Equivalent resistance change permitted: Shall not exceed 40 ohms.

Vibration: Method 201 Of MIL-STD-202.
Frequency change permitted: ±2.5 ppm.
Equivalent resistance change permitted: Shall not exceed 40 ohms.

Temperature cycling:
Frequency change permitted: ±2.5 ppm.
Equivalent resistance change permitted: Shall not exceed 40 ohms.

Aging:
Frequency change permitted: ±0.5 ppm.

QUALITY ASSURANCE PROVISIONS:

Qualification inspection: Not applicable for this specification.
Quality conformance inspection: Group A tests of MIL-C-3098 shall be applicable.

NOTE: CR160/U is similar to CR150/U except for the holder and tighter aging tolerance.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:01Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI, SM
Navy - SH
Air Force - 99
DLA - ES

User activities:
Navy - AS, CG, MC, OS
Air Force - 17, 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5955-0662)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:01Z
Check the source to verify that this is the current version before use.