20 March 1968
SUPERSEDING
MIL-P-1407B
19 June 1963

MILITARY SPECIFICATION

PIN SET, MARKING, LAUNDRY

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 This specification covers one type of laundry marking pin set, complete with carrier cases, trays, and numbered and plain pins, furnished either as complete sets or as individual components (see 6.2).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in l ffect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

* SPECIFICATIONS

FEDERAL

L-P-378	-	Polyethylene, Sheet and Strip (Polyolefin).
QQ-A-250/2	-	Aluminum Alloy 3003, Plate and Sheet.
QQ-B-613		Brass, Leaded and Non-Leaded; Flat Products (Plate, Bar, Sheet, and Strip).
QQ-S-634		Steel, Bar, Carbon, Cold Finished, (Standard Quality).
QQ-S-698		Steel, Sheet and Strip, Low-Carbon.
QQ-W-321		Wire, Brass.
TT-C-490		Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-529		Enamel, Alkyd, Semigloss.
TT-P-636		Primer Coating, Alkyd, Wood and Ferrous Metal.
UU-P-268		Paper, Kraft, Untreated, Wrapping.
PPP-B-636		Box, Fiberboard.
PPP-F-320		Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

Fed. Std. No. 595 - Colors.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.

DRAWINGS

ARMY NATICK LABORATORIES

5-7-30 - Pin Set, Marking Laundry, Complete with Pins: Carrier and Tray.
5-7-31 - Pin Set, Marking Laundry, Complete with Pins: Pins.

(Miniature copies of Drawings 5-7-30 and 5-7-31, identified as figures 1 and 2 respectively, are attached for information purposes only.)

(Copies of specifications, standards and drawings required by suppliers in connectiwith specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on elate of invitation for bias or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

AMERICAN TRUCKING ASSOCIATIONS, INC.

National Motor Freight Classification Rules

(Application for copies should be addressed to the American Trucking Association, Inc., 1616 P Street, N.W., Washington, D,C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Preproduction sample.- When specified (see 6.2), before production is commenced, a sample of the item covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production item.

3.2 Materia1s.- Materials not definitely specified shall be of the quality currently used for the purpose in commercial practice.

3.2.1 Brass wire.- Brass wire shall conform to composition 6, spring temper of QQ-W-321.

3.2.2 Brass sheet and strip.- Brass sheet and strip shall conform to composition 2, annealed of QQ-B-613.

* 3.2.3 Steel. carbon.- Cold rolled commercial quality carbon steel in the steel numbers specified in the drawings shall conform to QQ-S-634 for steel bar and QQ-S-698 for steel sheet.

* 3.2.4 Aluminum sheet.- Aluminum sheet shall conform to QQ-A-250/2.

3.2.5 Primer. - Primer shall conform to TT-P-636.

3.2.6 Enamel.- Enamel shall conform to class A or B of TT-E-529. Color shall be olive drab No, X24087 conforming to Fed. Std. No. 595.

3.3 Components.- The laundry marking pin set (see 6.2) shall consist of 8 carrier cases. Each carrier case shall contain 24 trays and, in addition, 50 plain pins. Each tray shall contain 20 numbered pins.

3.3.1 Component identiflcation.-

3.3.1.1 Carrier case.- Each carrier case shall be marked to identify the 24 trays it contains with an identifying letter and numbered from 1 to 24 in accordance with table I and as shown on Drawing 5-7-30.

TABLE I.- Identification numbering for carrier cases

Carriers Cases	Identification Numbering
Case A	A1 - A24
Case B	B1 - B24
Case C	C1 - C24
Case D	D1 - D24
Case E	E1 - E24

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

TABLE I.- Identification numbering for carrier cases (cont'd)

Carriers Case	Identification numbering
Case F	F1 - F24
Case G	G1 - G24
Case H	H1 - H24

3.3.1.2 Tray.- Each of the 24 trays in a carrier case shall be marked with an identification number consisting of the carrier case letter and a number from the series 1 through 24.

3.3.1.3 Numbered pins.- Each of the 20 pins in a tray shall have the same identification number as the tray.

3.3.1.4 Plain Pins.- The plain pins shall have no identification number.

3.4 Design.-

3.4.1 Carrier case and tray.- The design of the carrier case and tray shall be as shown on Drawing 5-7-30.

3.4.2 Numbered and plain pins.- The design of the numbered and plain pins shall be as shown on Drawing 5-7-31. At the option of the supplier, numbered and plain pins of an alternate design shall be acceptable, provided the pins are interchangeable with the pins shown on Drawing 5-7-31 to the extent that the pins fit into the tray and the tray filled with pins into the carrier case.

3.5 Construction.- The construction of all components shall conform to the requirements herein and as shown on Drawings 5-7-30 and 5-7-31.

3.5.1 Carrier case assembly.-

* 3.5.1.1 Body and lid.- The body and lid shall be fabricated of material specified in 3.2.3. The edges of the body and lid, except on the handle side and where the hinge joins the lid and bottom, shall be folded flat upon itself and tightly crimped. The hinge side of the body shall be dimpled outward in four places to form ball section radii or cone bumpers.

3.5.1.2 Latch keeper, latch retainer, and handle retainer.- The keeper and retainers shall be fabricated as shown on drawings from sheet specified in 3.2.3 and shall be securely spot welded to the carrier.

3.5.1.3 Handle and latch.- The handle and latch shall be fabricated of steel specified in 3.2.3. After assembly and painting, the handle and latch shall slide or rotate freely.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

3.5.1,4 Hinge.- The hinge shall be fabricated of sheet steel specified in 3.2,3 and shall be of a continuous type. The hinge shall be fastened to the body and lid so that the lid shall set properly on the body without forcing. The hinge pin shall have a drive fit on one leaf of the hinge with a freely rotating fit, after painting, on the other leaf.

* 3.5.2 Trays.- The trays shall be fabricated of material specified in 3.2.4. A finger grip shall be fabricated as shown on the applicable drawing. The pin holes shall be punched, leaving a flat side bent inward as shown on drawing.

3.5.3 Pins.-

3.5.3.1 Pin body.- The pin body shall be fabricated from material specified in 3.2.1. The non-pointed end shall have an angle bend or a radius bend and shall be permanently clamped and staked to the head.

3.5.3.2 Pin head.- The pin head shall be fabricated of material specified in 3.2.2. The pin shall fit the tray with the head protruding not more than 7/8 inch.

3.6 Finish.-

3.6.1 Surface preparation.- All surfaces and edges shall be free from burrs and sharp edges prior to finishing,

3.6.2 Carrier case surfaces.- All surfaces of the carrier case shall be thoroughly cleaned and conditioned for painting in accordance with any method or type of TT-C-490.

* 3.6.2.1 Priming.- Following surface preparation, all interior and exterior surfaces of the carrier case shall be completely covered with the primer specified in 3.2.5, Primer shall be thoroughly dried prior to application of the enamel.

* 3.6.2.2 Enameling.- The primed surfaces of the carrier case shall be coated with enamel specified in 3.2.6. The final finish shall be uniform in color, gloss, and appearance and shall be free of wrinkles, sags, blisters, foreign matter, or other defects characteristic of improper application.

3.6.3 Pins and trays.- The pins and trays shall have a natural finish and shall be cleaned of all dirt, oil, and other foreign substances. The pins and trays shall be marked for identification in accordance with 3.7.

* 3.7 Marking for identification.-

3.7.1 Identification numbering.-

3.7.1.1 Carrier case numbering.- Each carrier case shall have identification numbering (see 3.3.1.1) stenciled in accordance with MIL-STD-130. The location and height of the numbering shall be as shown on Drawing 5-7-30.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

3.7.1.2 Tray numbering.- Each tray shall have identification numbering (see 3.3.1.2) stenciled in accordance with MIL-STD-130. The location and height of the numbering shall be as shown on Drawing 5-7-30.

3.7.1.3 Pin numbering.- Each numbered pin shall be embossed with identification number (see 3.3.1.3). The location and height of the numbering shall be as shown on Drawing 5-7-31.

3.8 Interchangeability.- All component parts of any one unit shall be fabricated to be interchangeable with the like parts of any other unit furnished under any one contract,

3.9 Workmanship.- The complete pin set shall be free of sharp edges, burrs, cracks, splinters, and fractures. Crimped edges of the case shall be tight. The enamel finish shall be free of runs, thick places, streaks, poor coverage, wrinkles, and blisters. The pin point shall be sharp and smooth.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Preproduction sample inspection.- When a preproduction sample is required, it shall be examined for defects as listed in table II and dimensions specified.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.3.2 In process inspection.- Inspection shall be made to determine that surfaces of the carrier case are cleaned and conditioned before painting in accordance with TT-C-490 and application of primer coating on all surface; of the carrier case are in accordance with 3.6.2.1. Whenever non-conformance is noted, correction shall be made to the affected items and lot in process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

4.3.3 End item inspection.- The inspection lot shall consist of all completely fabricated pin sets offered for inspection at one time. The sample unit shall be one complete pin set.

4.3.3.1 Visual examination.- Examination of the end item shall be made in accordance with the classification of defects in table 11. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE II.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not as specified	x	
Carrier case	Color does not conform to X24087		X
	Streaks, runs, thick places, poor coverage, wrinkles and blisters, foreign matter imbedded in the finish	x	
Pins and trays	Not a natural finish; contains dirt, oil, or foreign matter	x	
Workmanship and construction	Brass corroded	x	
Pins	Head (clasp) not tight Fit to body		x
	Not designed as shown on drawing (unless alternate pin design applicable)	x	
	Staking not neat		x
	Point not sharp and smooth	x	
Tray	Finger grip fractured or sharp	x	
	Not one piece construction	x	
	Assembled with less than 3 spot welds		x
	Pinholes not punched correctly (have burred edges)		x
	Flat side not bent inward	x	
	Not 20 pinholes	x	
	Pinholes in wrong position		x

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Workmanship and construction (cent'd)			
Hinge side of body	Not dimpled to form 4 bumpers	x	
	Bumpers not located as shown on drawing		x
	Hinge secured with less than 7 spot welds	x	
	Hinge loose at spot weld	x	
	Spot weld insecure		x
	Case rests on hinge instead of dimples	x	
	Dimple, ruptured or cracked		x
	Forming, cracked, or ruptured	x	
	Hinge not continuous type		x
	Hinge pin not a drive fit on one leaf or hinge	x	
	Hinge does not permit a freely rotating fit on one leaf of hinge (after painting)		x
	Latch and latch retainer not constructed as shown on drawing		x
Handle side of body	Latch does not have slide or free rotating fit		x
	Latch retainer plate missing	x	
	Latch retainer secured with less than 6 spot welds		x
	Latch keeper secured with less than 3 spot welds		x
	Handle retainer secured with less than 6 spot welds		x
	Handle does not have a freely rotating fit (after painting)		x
Lid	Does not set properly on body without forcing	x	
	Crimping, cracked or fractured, or not tight	x	
	Hinge secured to lid with less than 7 spot welds	x	
	Edges not crimped (except at hinge attachment)	x	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Workmanship and construction (cont'd)			
Body	Less than 8 assembly spot welds on each end		x
	Not 3 partitions	x	
	Partitions secured to body with less than 13 spot welds	x	
	Partition ends not cut at 45 degrees on side welded to body		x
Assembly (final)	Missing component	x	
	Tray does not fit carrier	x	
	Carrier will not close with trays in place	x	
	Carrier will not latch with trays in place	x	
	Crimped edges not tight	x	
	Wrong quantity of pins		x
	Sharp edges, burrs or cracks not removed	x	
Identification (pins)	Numbering not embossed		x
	Number or letter incorrect or illegible	x	
Tray	Identification numbering incorrect	x	
Carrier case	Identification numbering missing or incorrect	x	

* 4.3.3.2 Dimensional examination.- Inspection shall be made of pin sets for compliance with dimensions specified. Any deviation from specified requirements shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.3.4 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and marking as required by section 5 of the specification are complied with. Defects shall be as indicated in table 111. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers offered for delivery at one time. The inspection level shall be S-2 and the AQL shall be 4.0 defects, expressed in terms of defects per hundred units.

* 4.3.4.1 Examination for closure and strapping of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

for defects in closure and strapping shall be in accordance with the appendix of that specification.

TABLE III.- Packaging and packing defects

Examination	Defect
Markings (exterior and interior container)	Missing; incorrect; illegible; of improper size, location, sequence, or method of application.
Packaging	Additional 50 plain pins omitted or not prepackaged as specified. Door of carrier not closed securely with latch. Corrugate fiberboard pads omitted or not sufficient amount. Carrier not packaged in an intermediate container.
Packing	Number of packaged carriers more or less than specified. Not consecutive series. Packages do not fit snugly in container. Improperly waterproofed.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.-

5.1.1.1 Prepacking.- The numbered pins shall be inserted in their proper trays l nd filled trays then placed in their respective carrier cases. Fifty plain pins shall be closed and packaged in a minimum 60-pound kraft paper bag fabricated from material conforming to grade E of UU-P-268, or a polyethylene bag l nd placed in each carrier case. The film for polyethylene bag shall be minimum 0.003 Inch thick conforming to type II, grade A, B, or C finish 1 or 2 of L-P-378. All scams of the polyethylene bag shall be effected by heat sealing.

* 5.1.1.2 Packaging.- Corrugated fiberboard pads shall be inserted between the trays and all interior surfaces of the carrier case to insure a tight pack. The door of each carrier case shall then be secured with the latch provided. Each carrier case shall then be packaged in a snug-fitting fiberboard box conforming to type CF, variety SW, or type SF, class domestic of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

* 5.1.2 Level C.- Carriers shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

l 5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Unless otherwise specified (see 6.2), four carriers, AI-A24, BI-B24, C-and DI-D24 or EI-E24, FI-F24, CI-G24, and HI-H24, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

* 5.2.2 Level B.- Four carriers, AI-A24, BI-B24, CI-C24, and DI-D24 or EI-E24, FI-F24, GI-G24, and HI-H24, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type CF. variety SW, or type SF, class domestic of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto. The shipping container material may also be grade V4s of PPP-F-320.

* 5.2.3 Level C.- Carriers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers and packing shall comply with Uniform Freight Classification Rules or National Motor Freight Classification Rules.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers (with set assembly markings) shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The laundry marking pin set, complete with pins, is intended to be used to mark, for identification purposes, laundry cleaned in military operated field laundries.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When to be procured either in complete sets or individual components (see 1.1 and 3.3).
(c) When a preproduction sample is required (see 3.1).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When other than fiberboard shipping containers are required for level A packing (see 5.2.1).
(f) Weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

6,3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, corrections, modification, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content as written, irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - YD
Air Force - 84

Preparing activity:

Army - GL

Project No. 3510-0088


Review activities:

Navy - YD
Air Force - 84, 45, 85

User activities:

Army - MD, SM
Navy - MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

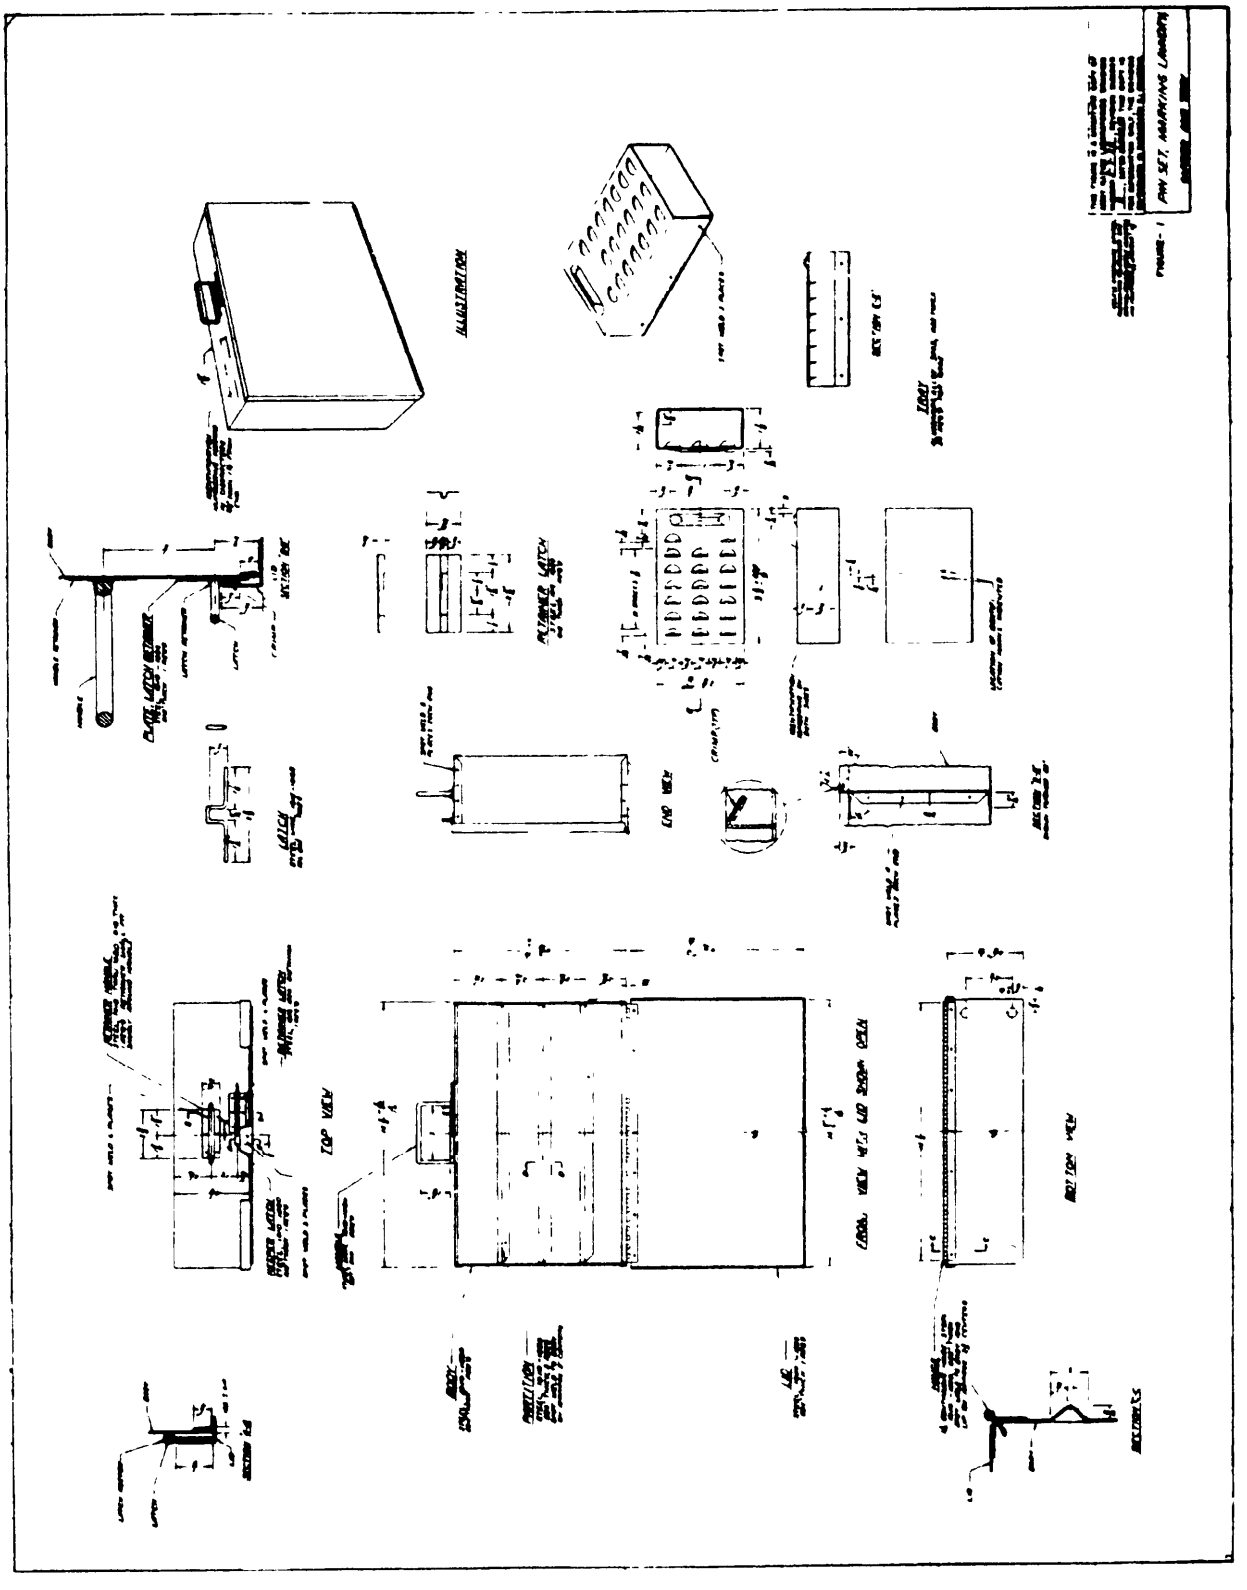

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:16Z
Check the source to verify that this is the current version before use.

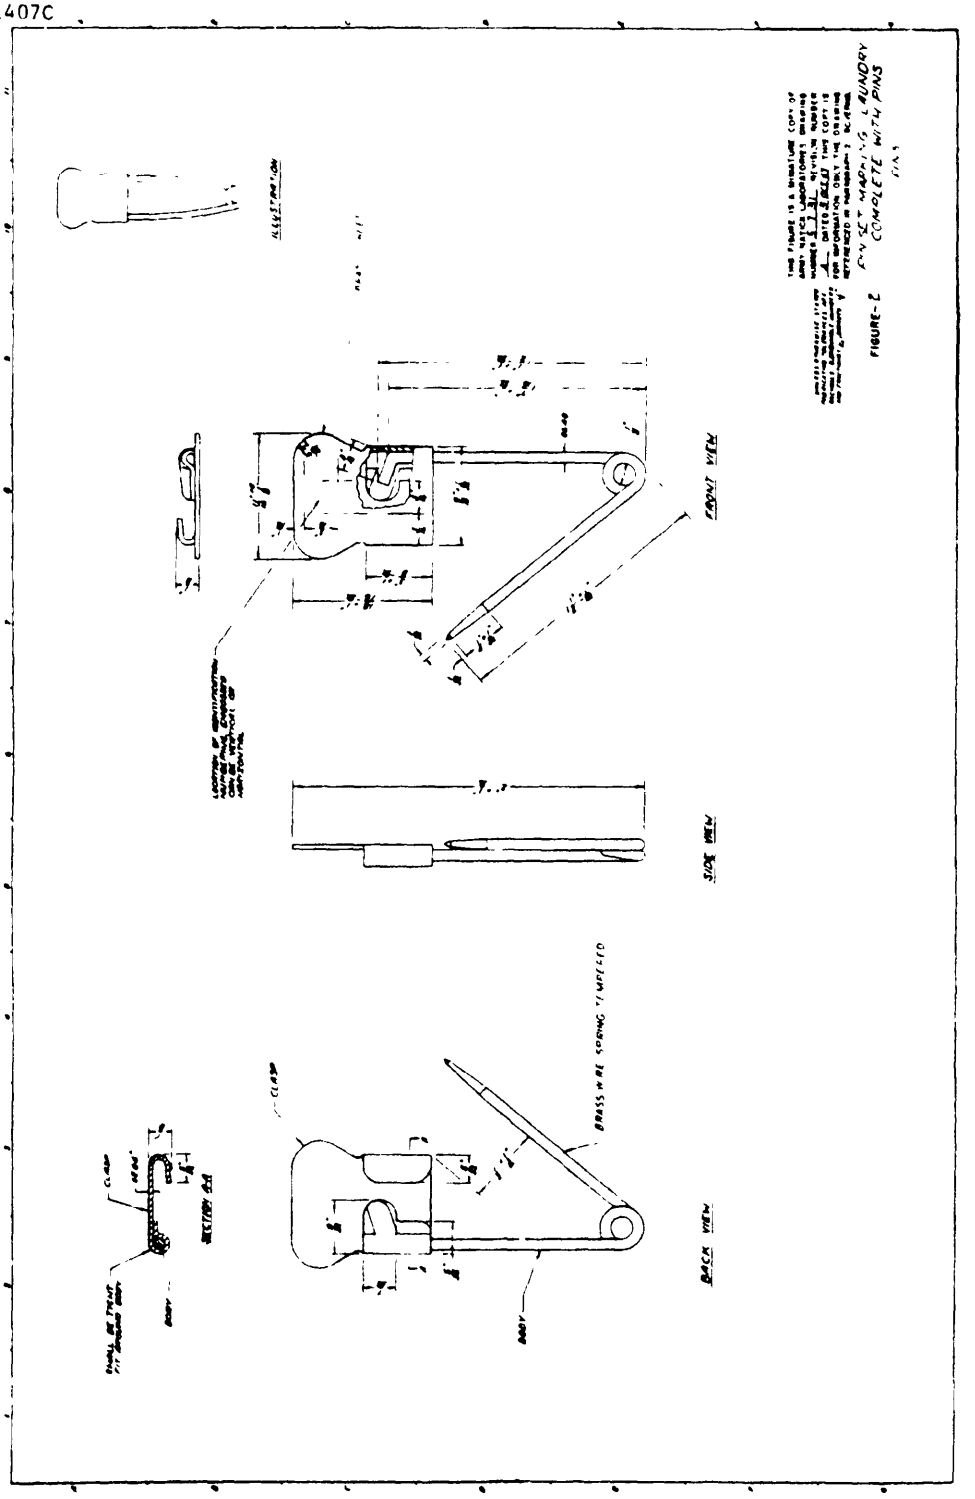


FIGURE 2. Pin set, marking, laundry complete with pins

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:16Z
Check the source to verify that this is the current version before use.

"to detach this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Pin Set, Marking, Laundry - MIL-P-1407C

ORGANIZATION	CITY AND STATE

CONTRACT NO	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 61 1426

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:16Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-QS
Natick, Massachusetts 01760

FOLD

"to detach this form, cut along this line"

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.