MIL-H-1404D

6 February 1970
SUPERSEDING
MIL-H-1404C
19 March 1965

MILITARY SPECIFICATION

HOLDERS, CARD-LABEL

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers card-label holders (see 6.1).

1.2 Classification.- Card-label holders shall be of the following types, as specified (see 6.2).

Type I - For fastening with bolt, screw or rivet

Type II - For fastening with flap and slot or by bending top to form a hook

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-A-250/1	-	Aluminum Alloy 1100, Plate and Sheet
QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings
TT-E-485	-	Enamel, Semi-Gloss, Rust-Inhibiting
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-636	-	Box, Fiberboard
PPP-B-676	-	Boxes, Setup

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-595 - Colors

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.
National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Attn: Tarriff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

THE ALUMINUM ASSOCIATION
Color and Quality Standards for Painted Aluminum Sheet - January 1965

(Application for copies should be addressed to The Aluminum Association, 420 Lexington Avenue, New York, N.Y.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 First article.- When specified (see 6.2), before production is commenced, a sample of the finished, specified card-label holder covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production card-label holders.

3.2 Materials.- Materials not definitely specified shall be of the quality normally used by the supplier for card-label holders, provided the completed item complies with all provisions of this specification.

3.2.1 Steel, sheet and strip.- The steel sheet or strip shall be cold-rolled, any quality or temper, in accordance with QQ-S-698. The thickness shall be 0.0149 inch (28 ga.) nominal thickness.

3.2.2 Aluminum, plate or sheet.- The aluminum plate or sheet shall conform to 1100-H14 or 1100-H24 of QQ-A-250/1. The thickness shall be 0.020 inch (24 Browne & Sharp gauge).

3.2.3 Enamel.- The enamel shall conform to type I of TT-E-485. The color shall be Olive Drab No. X24087 of FED-STD-595.

3.3 Construction.-

3.3.1 Type I.- The type I card holder shall be fabricated from material specified in 3.2.1, or at the option of the supplier, holder may be fabricated from either steel sheet or strip conforming to 3.2.1, precoated both sides with enamel specified in 3.2.3, or prepainted aluminum sheet conforming to The Aluminum Association's Color and Quality Standard for Painted Aluminum Sheet. A pretreatment in accordance with standard industry practice shall precede enameling. The type I card holder shall be constructed in accordance with the details and dimensions as shown on figure 1.

3.3.2 Type II.- The card holder shall be fabricated from the material specified in 3.2.2, and shall be constructed in accordance with the details and dimensions as shown on figure 2.

* 3.3.3 Tolerance.- Except where indicated (see figure 1), the tolerance for fractional dimensions for the type I and type II holders shall be plus or minus 1/64 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

3.4 Finish.-

3.4.1 Type I.-

* 3.4.1.1 Surface preparation.- The card-label holder shall be cleaned by any method and pretreated in accordance with type I or type II of TT-C-490, except for card holders made of precoated sheet.

* 3.4.1.2 Enameling.- After surface pretreatment, the card holder shall be coated on all surfaces with enamel specified in 3.2.3, except for card holders made of precoated sheets. The enamel shall be baked on for not less than 45 minutes at 250 F., or for an equivalent baking period at a higher or lower temperature that shall not affect adhesion or color.

* 3.4.2 Type II.- The type II card-label holders shall be a natural finish.

3.5 Marking for identification.- The card holder shall be marked with the manufacturer's identification or readily identifiable trademarks.

* 3.6 Workmanship.- All surfaces and cut edges shall be free of burrs, slivers, projections, rough or sharp edges, and shall not be cracked, fractured or malformed. Channel opening shall be uniform. Enamel shall be clean and smooth free from blisters, peel, wrinkles, separation of color, or areas of no film.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects in table I and dimensions specified. The presence of any visual defect or any dimension not within the specified requirements shall be cause for rejection of the preproduction sample.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

* 4.3.1 Components and material inspection.- In accordance with 4.1 components and materials shall be tested and inspected in accordance with all the requirements of referenced specifications and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.2 Process inspection.- Inspection shall be made at any point or any phase of the manufacturing process to determine whether the required operations are accomplished as specified. Intermediate inspection shall be conducted to see that the type I holders are pretreated as specified in 3.4.1.1. Whenever nonconformance is noted, correction shall be made to affected items and process.

* 4.3.3 End item inspection.- The lot shall be expressed as all the holders of one type offered for inspection at one time. The sample unit for this inspection shall be one completely finished card-label holder.

* 4.3.3.1 Visual inspection.- Holders shall be examined for defects classified in table I. The inspection level shall be II with an acceptable quality level (AQL) of 4.0 for major defects and 10.0 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Color of type I not as specified.	X	
	Enamel has breaks, blisters, wrinkles, orange peel, separation of color.		X
	Area of no film.	X	
	Type II not natural aluminum finish.	X	
Workmanship	Channel closed against face.	X	
	Channel not uniform (partly closed).		X
	Bent or malformed.	X	
	Fracture of metal.	X	
	All surfaces and cut edges not free of sharp edge, burr, slivers and projections.	X	
Marking	Missing, incomplete, illegible or incorrect.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

4.3.3.2 Dimensional inspection.- Inspection shall be made of holders for compliance with dimensions specified. Any deviation therefrom shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

TABLE II.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method or application
Materials	Any component missing or damaged
Workmanship	Inadequate application of components such as holders not separated by tissue paper Bulging or distortion of containers
Contents	Number per interior package and shipping container is more or less than required

* 4.3.4.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.- One hundred type I or type II holders shall be packaged on their bottom or side edges in one row, in a snug-fitting folding or setup paperboard box conforming to variety I, style III or VIII, type G, class 1 of PPP-B-566; or type I, variety 1 class A, style 3 or 4 of

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

PPP-B-676, respectively. The holders shall be separated by sheets of white tissue paper having a minimum basis weight of 10 pounds per ream (24 x 36 - 480). Each box shall be closed in accordance with the appendix of the applicable box specification.

5.1.2 Level C.- Holders shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

* 5.2.1 Level A.- Nine hundred type I holders or twelve hundred type II holders, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to grade V2s, style RSC of PPP-B-636. Each shipping container shall be closed, waterproofed by means of tape, and reinforced in accordance with the appendix of PPP-B-636.

* 5.2.2 Level B.- Nine hundred type I holders or twelve hundred type II holders packaged as specified in 5.1, shall be packed in a snug-fitting, fiberboard shipping container conforming to style RSC, type CF or SF, class domestic, style RSC of PPP-B-636. Each shipping container shall be securely closed in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

* 5.2.3 Level C.- Holders, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The card holders covered by this specification are intended for use in retention of identification cards that are attached to bedsteads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Type required (see 1.2).

(c) First article.- When preproduction sample is required (see 3.1).

(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

Review activity:

Air Force - 84

User activities:


Army - MD
Navy - MC


Preparing activity:

Army - GL

Project No. 9905-0125

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

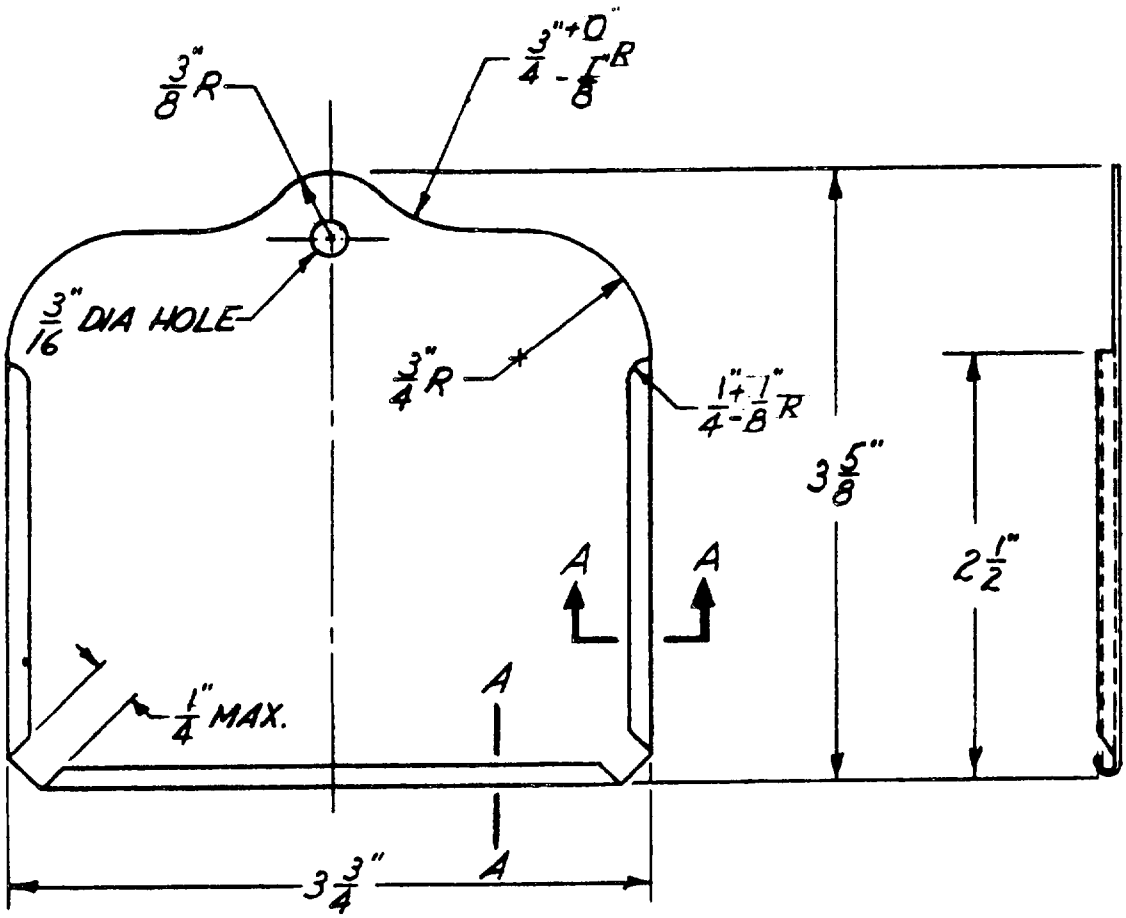

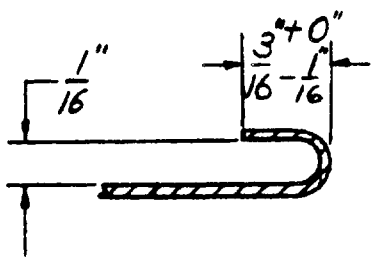

SECTION A-A

FIG. 1 HOLDER, CARD-LABEL, TYPE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

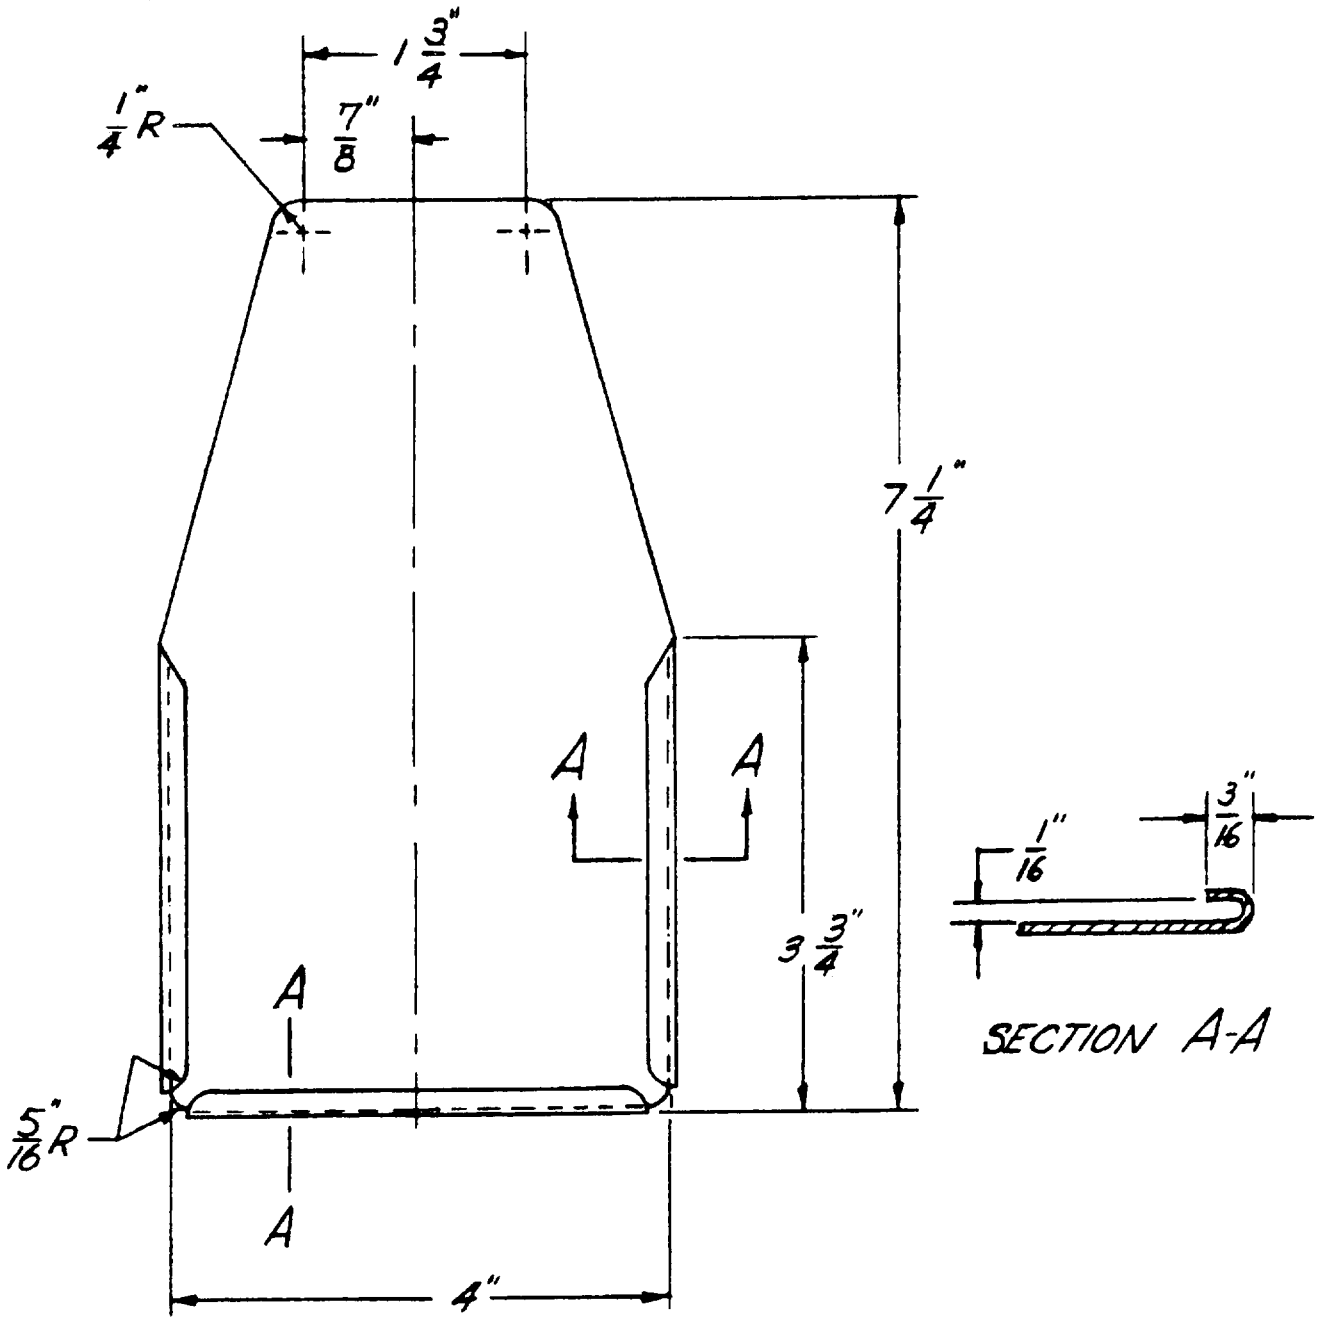


FIG. 2 - HOLDER, CARD, LABEL, TYPE II

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
Holders, Card-Label TL-H-1404D

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-EPS
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:16Z
Check the source to verify that this is the current version before use.