NOT MEASUREMENT SENSITIVE

MIL-L-11484/176
30 January 1991

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, RETIREE, CIVILIAN, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-L-11484.

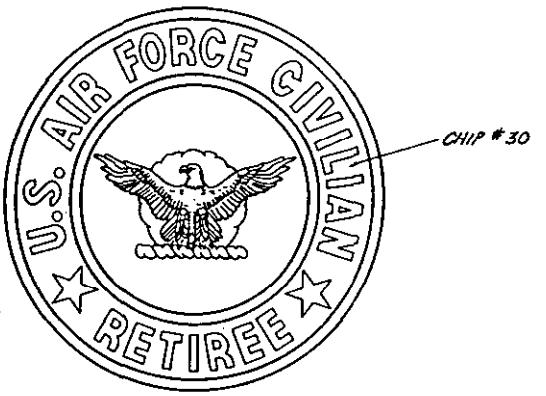

MATERIAL: Gilding metal.

DIMENSIONS:
DIAMETER: 5/8 inch (1.59 cm) (REF)
THICKNESS: .070 inch ± .005 inch (0.177 cm ± 0.012 cm)

FINISH: Hard enameled, gold plated, mirror-like polished.

NOTES:
1. The enameled area shall be as indicated. The color shall conform to TIOH blue chip No. 30 or the standard sample.
2. The attaching device shall be a prong with pick and flat ball clutch type centered on the reverse side.
3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0567)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T12:13Z
Check the source to verify that this is the current version before use.