INCH - POUND


MIL-DTL-11484/176C
14 October 2016
SUPERSEDING
MIL-DTL-11484/176B
27 September 1996

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, RETIREE, CIVILIAN, U.S. AIR FORCE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

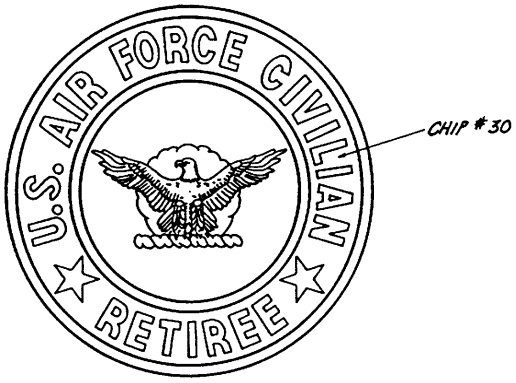

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: Epoxy resin (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6

DIMENSION:
DIAMETER: 5/8 inch (REF)
THICKNESS (At Thickest part): 0.070 inch $\pm$ 0.005 inch

ATTACHING DEVICE:
1. Attaching device shall be prong with pick and flat ball type clutch

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T12:13Z
Check the source to verify that this is the current version before use.

NOTE:
The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIP	
COLOR	**CHIP NUMBER**
Blue	#30

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2016-803)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T12:13Z
Check the source to verify that this is the current version before use.