MILITARY STANDARD

TRUCKLOADING

BOMB, 500 LB MK 82 MOD 2 (THERMALLY PROTECTED)

ON BOMB PALLET MK 9 MOD 0 WITH SADDLES

FLEET ISSUE UNIT LOAD

MIL-STD-1320 10A

(NAVY)

15 FEBRUARY 1973


UNIT LOAD DATA

UNIT LOAD DRAWING WA-54 225

LENGTH	617 8
WIDTH	33 3 4
HEIGHT	28
CUBE	32 6 CU FT
WEIGHT	3174 5 LBS

DOT HAZARD CLASSIFICATION

EXPLOSIVES A

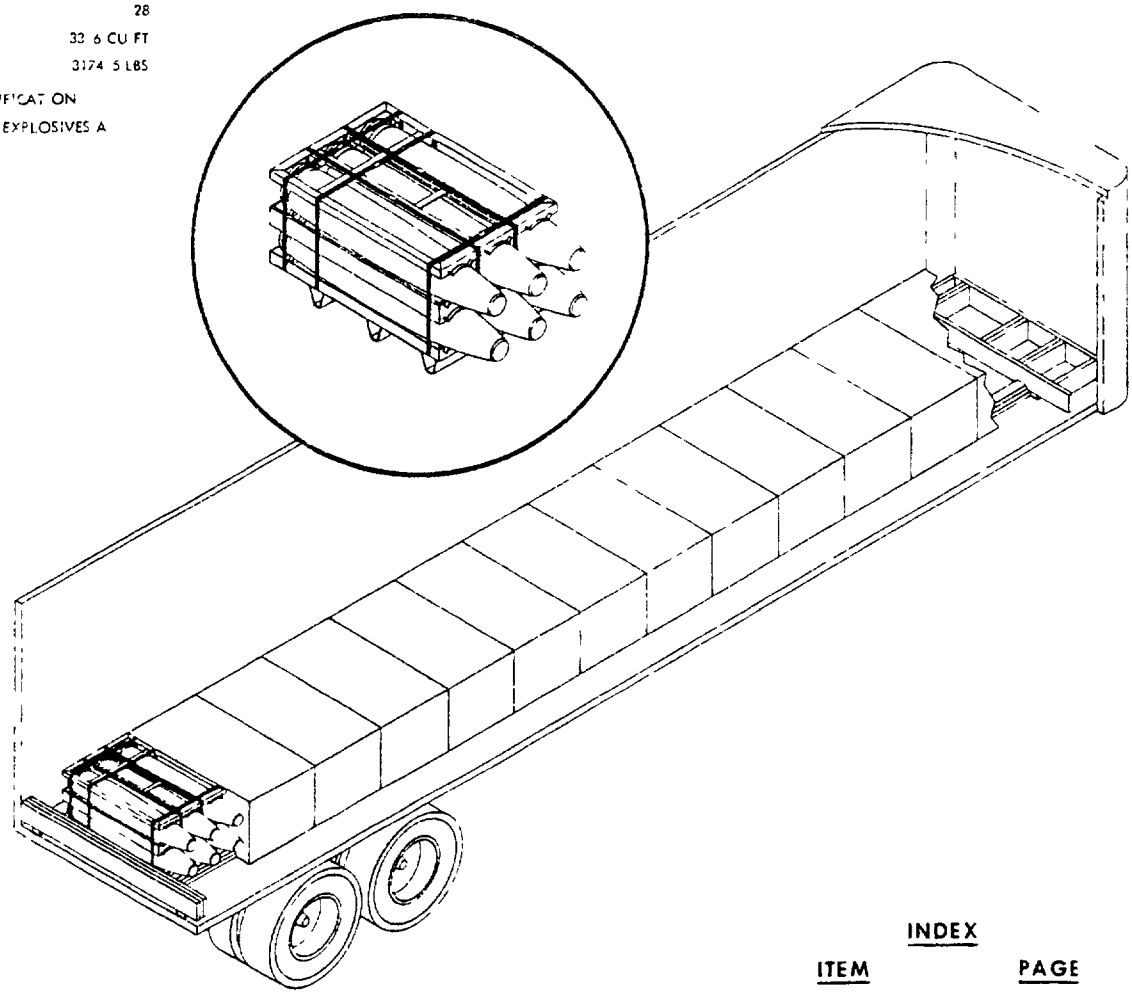

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL 40 FT TRAILER (VAN)	2 & 3
LTL 40 FT TRAILER (VAN)	4 & 5

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINER LOADING AND CARLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS MIL-HDBK-236

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

W. S. Gray NWL 1/22/73

SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

G. E. Kelly 1/23/73

SIGNATURE NAVAIRSYSCOM BY DIRECTION DATE

ORIGINATOR Charles McBride 1/23/73

SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY

N A D EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

GENERAL NOTES


1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING FLEET ISSUE UNIT LOADS OF MK 82 MOD 2 500 LB THERMALLY PROTECTED GENERAL PURPOSE BOMBS. THE BOMBS ARE ON THE MK 9 MOD 0 BOMB PALLET WITH SADDLES AND PALLETIZED IN ACCORDANCE WITH NAVAIR-54 225. NO OTHER LOADS ARE AUTHORIZED FOR SHIPMENT PER THIS DOCUMENT.
2. THE PROCEDURES AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT VAN TRAILERS WITH THE TRAILERS TANDEM AXLES LOCATED IN THE WESTERN POSITION AT THE EXTREME REAR OF THE TRAILER. DO NOT USE TRAILERS WITH METAL FLOORS.
3. SLEEPERS PIECES NO. 6 & 7 ARE OF RANDOM LENGTHS AND SHOULD BE PREPOSITIONED PRIOR TO START OF LOADING.
4. SLEEPER PIECES NO. 8 & 9 ARE 33 INCHES IN LENGTH AND SHOULD BE PREPOSITIONED JUST PRIOR TO LOADING EACH INDIVIDUAL UNIT LOAD.
5. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
6. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA. CLOSE AND SEAL TRAILER DOORS AND ATTACH EXPLOSIVES A PLACARD TO BOTH SIDES, FRONT AND BACK OF TRAILER.
7. APPLICABLE MATERIAL SPECIFICATIONS: DUNNAGE LUMBER MM-L-751; NAILS FF-N-105, COMMON CEMENT COATED OR CHEMICALLY ETCHED (ALTERNATE ANNULAR RING TYPE).
8. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320.

FTL 40 FT TRAILER (VAN)


1. QUANTITY AND THICKNESS OF PIECE NO. 5 DETAIL B, MAY VARY. THE REAR BLOCKING DETAIL B SHALL BEAR AGAINST THE UNIT LOAD AND THE TRAILER DOORS WHEN THE DOORS ARE IN THE CLOSED POSITION.

WARNING

DO NOT USE TRAILERS WITH ROLL UP REAR DOORS
WHEN BLOCKING AND BRACING BY THIS METHOD

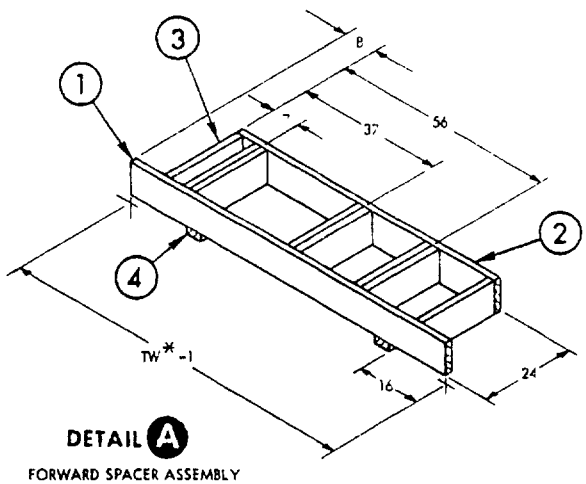


DETAIL A
FORWARD SPACER ASSEMBLY
(FOR 10 TO 12 UNIT LOADS)
1 REQUIRED

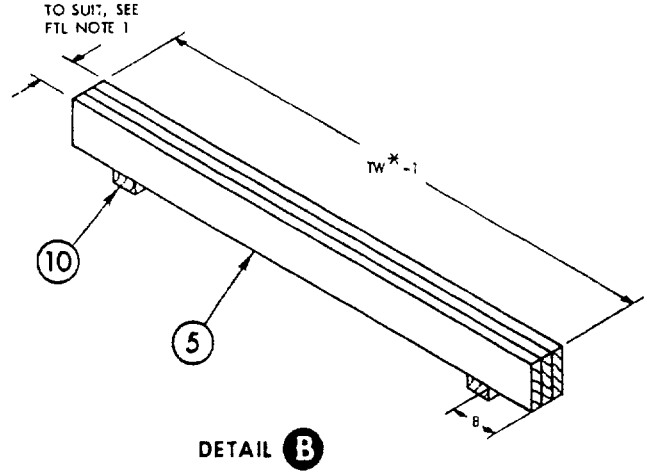


DETAIL B
REAR BLOCKING
1 REQUIRED

*TW TRAILER WIDTH

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

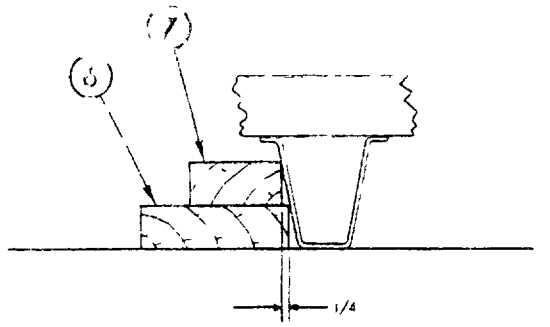


DETAIL C

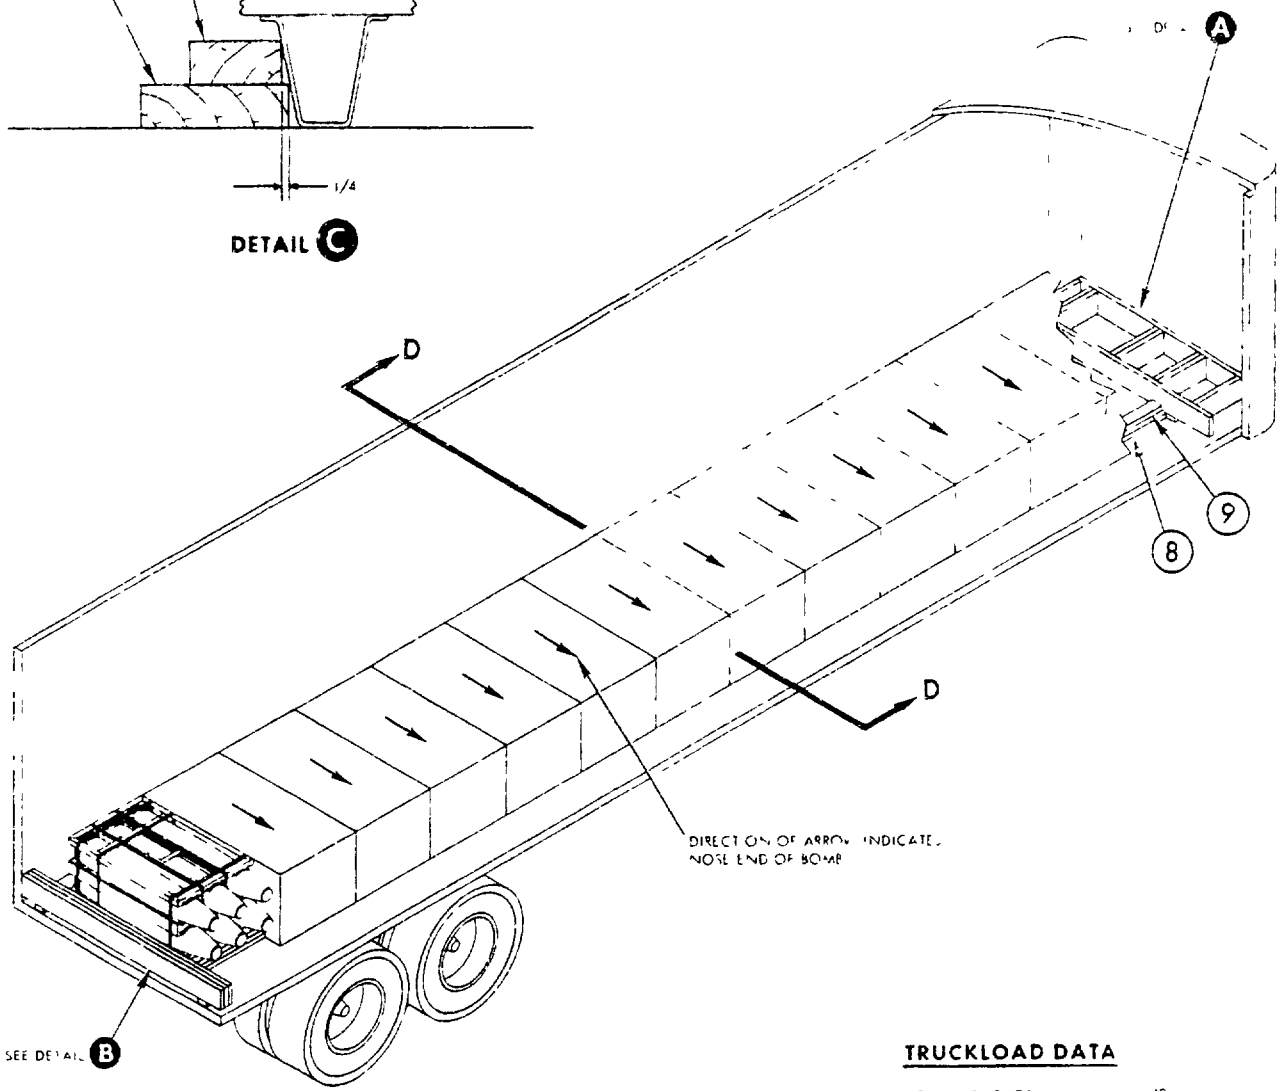

TRUCKLOAD DATA

NUMBER OF UNIT LOADS	10
WEIGHT OF TRUCKLOAD	41 275 LBS

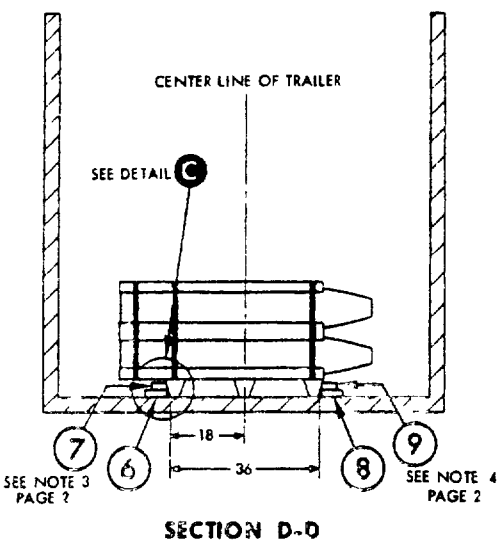

SECTION D-D

*TW = TRAILER WIDTH

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NUMBER NAILS	SIZE NAILS
10	SUPPORT	2 X 4 TO SUIT	2	5	2	16d
9	SLEEPER	2 X 4 X 32	13	8	5	16d
8	SLEEPER	2 X 6 X 32	13	TRAILER FLOOR	5	16d
7	SLEEPER	2 X 4 X 37 FT	RANDOM LENGTHS	6	EVERY 8 INCHES	16d
6	SLEEPER	2 X 6 X 37 FT	RANDOM LENGTHS	TRAILER FLOOR	EVER 8 INCHES	16d
5	CROSS MEMBER	2 X 8 X TW* - 1	TO SUIT	LAMINATE	6 JOINT	TO SUIT
4	SUPPORT	2 X 4 X 24	2	1 & 2	2 JOINT	16d
3	STRUT	2 X 8 X 21	8	SEE 1 & 2	-	-
2	FWD CROSS MEMBER	2 X 8 TO SUIT	1	3	3 JOINT	16d
1	AFT CROSS MEMBER	2 X 8 X TW* - 1	1	3	3 JOINT	16d

LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

LTL 40 FT TRAILER (VAN)

1 WHEN REQUIRED TO SHIP LESS THAN TRUCKLOAD ARRANGE THE UNIT LOADS IN A SINGLE ROW PATTERN AND USE THE BLOCKING AND BRACING METHODS SPECIFIED ON THESE PAGES

NOTE


TO PREVENT AXLE OVERLOAD THE FOLLOWING REQUIREMENT MUST BE FOLLOWED

A WHEN REQUIRED TO SHIP 10 TO 12 UNIT LOADS USE THE FORWARD SPACER ASSEMBLY DETAIL E


B WHEN REQUIRED TO SHIP LESS THAN TEN UNIT LOADS SUBSTITUTE THE FORWARD SPACER ASSEMBLY DETAIL F FOR DETAIL E

2 THE LTL ON PAGE 5 IS FOR 10 UNIT LOADS AND UTILIZES THE FORWARD SPACER ASSEMBLY DETAIL E WHEN REQUIRED TO SHIP LESS THAN THE 10 UNIT LOADS SHOWN SUBSTITUTE THE FORWARD SPACER ASSEMBLY DETAIL F FOR DETAIL E LTL SHIPMENTS ARE NOT LIMITED TO THIS QUANTITY THEY MAY CONSIST OF A GREATER OR LESSER NUMBER OF UNIT LOADS


3 ACTUAL SHIPPING REQUIREMENTS DETERMINE THE NUMBER OF UNIT LOADS TO BE SHIPPED THE LOAD PATTERN AND DUNNAGING SHALL BE IN ACCORDANCE WITH THE APPROPRIATE PARTS OF THIS MIL-STD AND THE GENERAL DOCUMENT

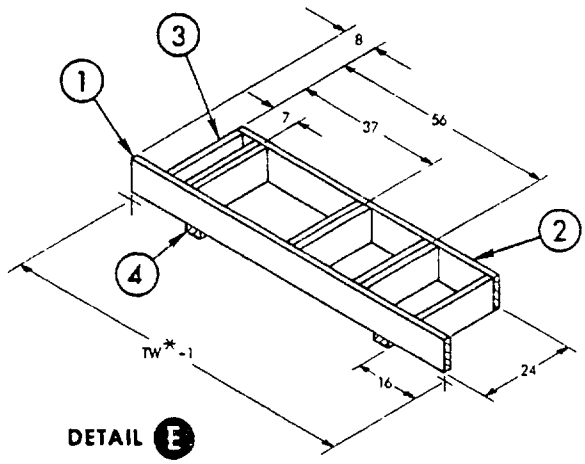

DETAIL E
FORWARD SPACER ASSEMBLY
(FOR 10 TO 12 UNIT LOADS)
1 REQUIRED

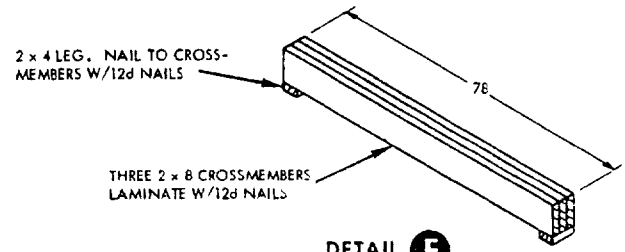


DETAIL F
FORWARD SPACER ASSEMBLY
(FOR 1 TO 9 UNIT LOADS)
1 REQUIRED

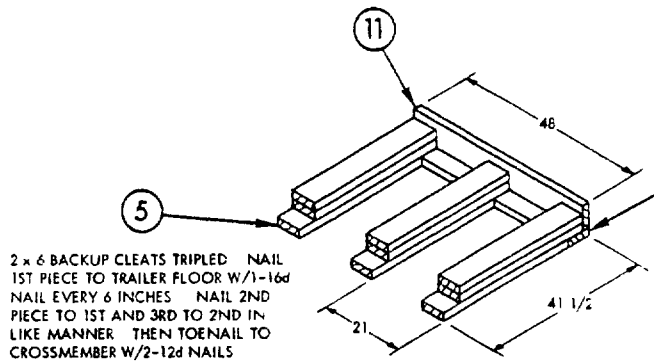


DETAIL G
REAR BLOCKING
1 REQUIRED
FOR 1 TO 12 UNIT LOADS


*TW = TRAILER WIDTH

Source: https://assist.dla.mil -- Downloaded: 2026-10-23123:432
Check the source to verify that this is the current version before use.

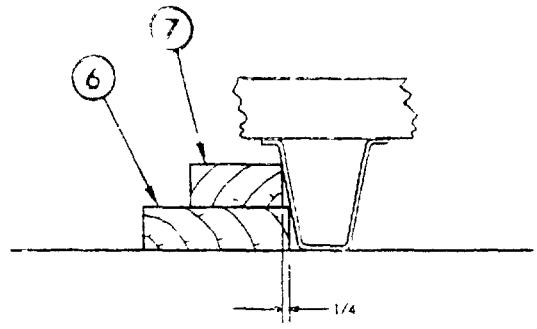

DETAIL H

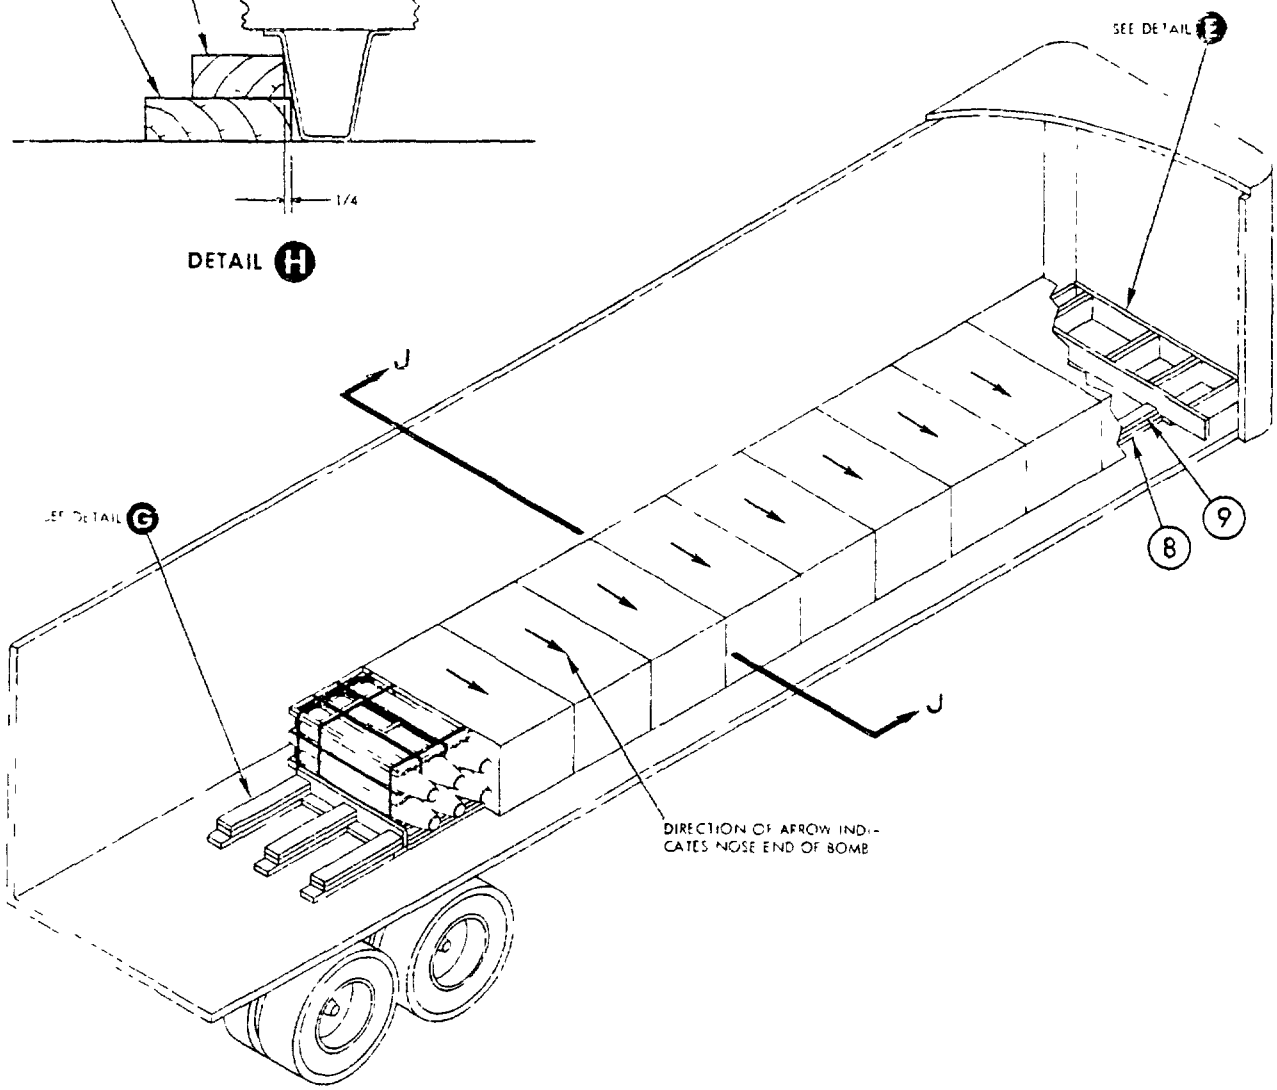

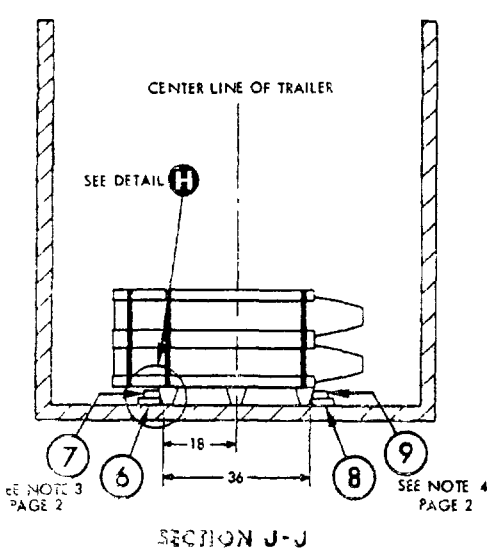

SECTION J-J

*TW TRAILER WIDTH

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NUMBER	SIZE
					NAILS	
11	UPPER CROSS MEMBER	2 X 6 X 4F	1	SEE DETAIL G		
10	LOWER CROSS MEMBER	2 X 6 X 4F	1	SEE DETAIL G		
9	SLEEPER	2 X 4 X 3"	10	B	5	16d
8	SLEEPER	2 X 6 X 33	10	TRAILER FLOOR	5	16d
7	SLEEPER	2 X 4 X 28 FT	RANDOM LENGTHS	6	EVERY 8 INCHES	16d
6	SLEEPER	2 X 6 X 28 FT	RANDOM LENGTHS	TRAILER FLOOR	EVERY 8 INCHES	16d
5	BACKUP CLEAT	2 X 6 X 36	5	SEE DETAIL C		
4	SUPPORT	2 X 4 X 24	2	1 & 2	2 JOINT	16d
3	STRUT	2 X 8 X 2-	8	SEE 1 & 2	-	-
2	FWD CROSS MEMBER	2 X 8 TO SUIT	1	3	3 JOINT	16d
1	AFT CROSS MEMBER	2 X 8 X TW *-1		3	3 JOINT	16d

LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.