
MILITARY STANDARD

MIL-STD-1320-243 (NAVY)
8 JUNE 1989


TRUCKLOADING
RAM ROUND PACK
IN MK 734 MOD 0 CONTAINER

CONTAINER DATA

DODIC/NALC.....
DIMENSIONS..... 134-3/8 L X 34-3/4 W X 24-7/8 H
GROSS WEIGHT..... 1210 LBS △
TARE WEIGHT..... 507 LBS △
CUBE..... 67.21 CU FT
△ DO NOT USE FOR SHIPPING WEIGHT

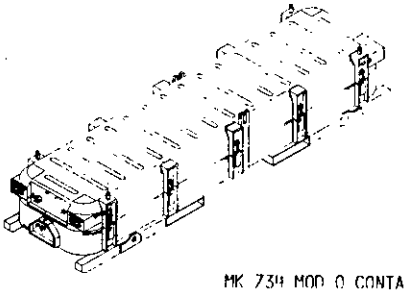

MK 734 MOD 0 CONTAINER

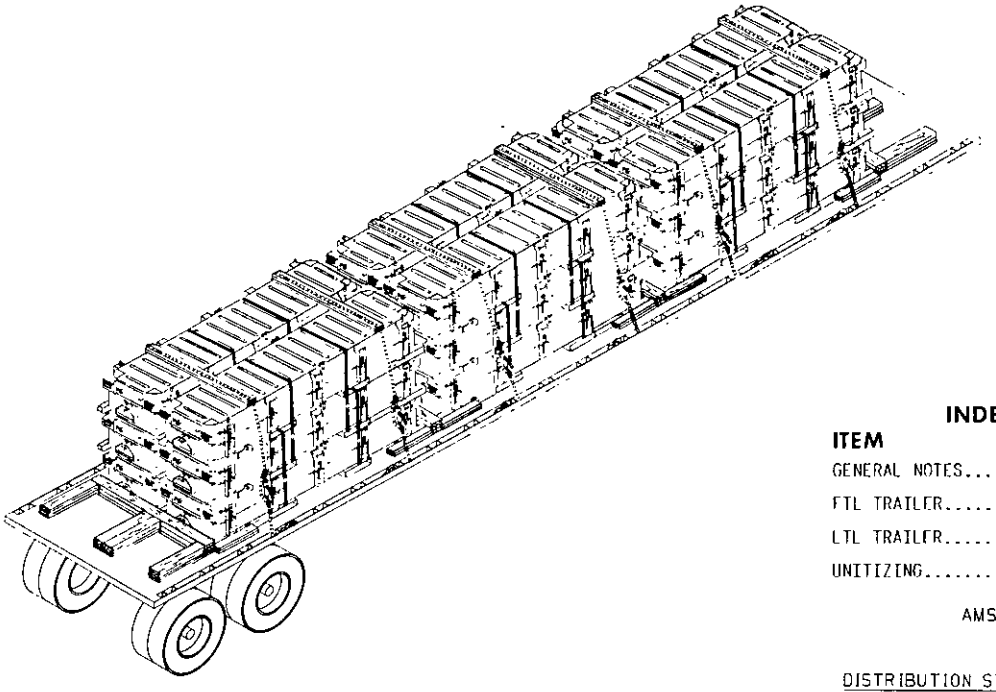

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL TRAILER	3
LTL TRAILER	4
UNITIZING	5

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY.

SIGNATURE, TDA, WPNSTA EARLE — DATE 6/1/89
SIGNATURE NAVSEASYSCOM BY DIRECTION — DATE 6-8-89

ORIGINATOR — 7 JUNE 89 DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil - Downloaded: 2022-10-22T20:49Z
Check the source to verify that this is the current version before use.


GENERAL NOTES


1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING RAM ROUND PACKS IN SHIPPING AND STORAGE CONTAINER, MK 734 MOD 0.
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 42 FT THROUGH 48 FT FLATBED TRAILERS WITH THE TRAILER'S TANDEM AXLES LOCATED IN THE "WESTERN POSITION" (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE-TO-ONE BASIS FOR TIE DOWNS.
4. STEEL STRAPPING USED AS TIE DOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS, AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY) EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. PROTECTOR BOARDS (DOUBLED 2 X 6'S) SHALL BE USED UNDER THE TIE DOWNS WHEN USING STEEL STRAPPING. THE STRAPS SHALL BE STAPLED TO THE PROTECTOR BOARD USING 2-INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIE DOWN.
7. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION, REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS, AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS, AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
8. UNLESS OTHERWISE SPECIFIED; DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS, AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
9. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR TRAILER WILL NOT EXCEED THESE LIMITATIONS.
10. AFTER THE BLOCKING, BRACING, AND TIE DOWNS HAVE BEEN INSPECTED, THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT, WATERPROOF TARPAULINS. THE TARPAULINS MAY BE UNDER THE TIE DOWNS.
11. AFTER THE TARPAULINS ARE IN PLACE, ATTACH "EXPLOSIVES" PLACARDS, AS APPLICABLE, TO BOTH SIDES, FRONT, AND BACK OF THE TRAILER AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER.
12. FOR GENERAL TRUCKLOADING PROCEDURES, REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

NOTE

TARPAULINS OVER CONTAINERS OMITTED.

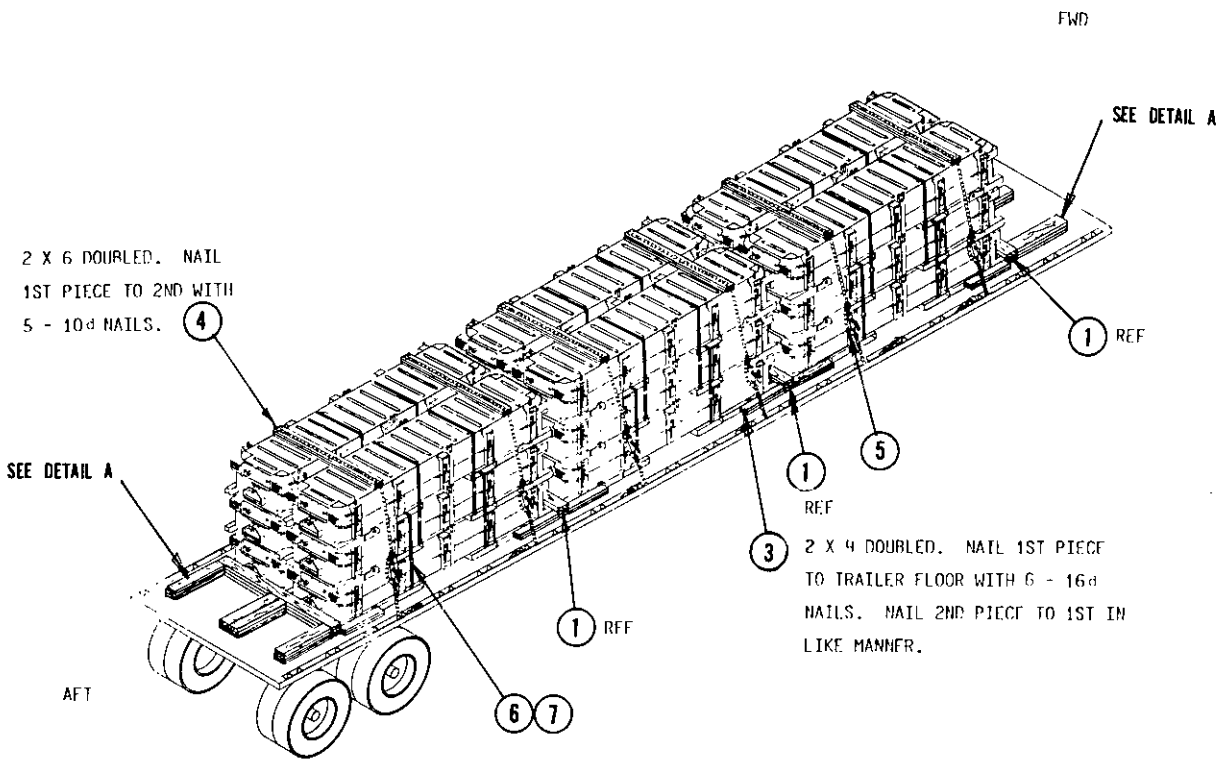

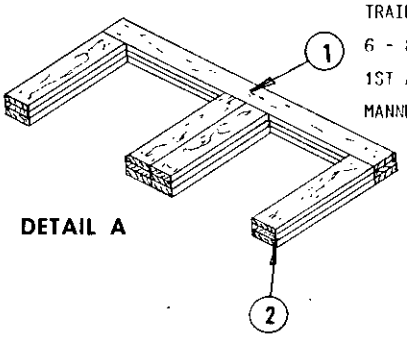

DETAIL A

2 X 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR WITH 16d NAILS EVERY 6 - 8 INCHES. NAIL 2ND PIECE TO 1ST AND 3RD PIECE TO 2ND IN LIKE MANNER.

2 X 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR WITH 8 - 16d NAILS. NAIL 2ND PIECE TO 1ST AND 3RD PIECE TO 2ND IN LIKE MANNER.

TRUCKLOAD DATA
42 THROUGH 48 FT TRAILER
NUMBER OF CONTAINERS..... 18
FTL WEIGHT..... 21,780 LBS
DO NOT USE FOR SHIPPING WEIGHT

FTL 42 FT THROUGH 48 FT TRAILER (FLATBED) (42 FT SHOWN)

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
24	7	SEAL	SEE NOTE 8. PAGE 2	1-1/4
24	6	STEEL STRAP	SEE NOTE 8. PAGE 2	1-1/4 X .035 X 15 FT 6
6	5	CHAIN AND LOAD BINDER	SEE NOTES 3, 5, 6 & 8. PAGE 2	5/16 OR 3/8
12	4	PROTECTOR BOARD	SEE NOTE 6 & 8. PAGE 2	2 X 6 X 66
24	3	SLEEPER	SEE NOTE 8. PAGE 2	2 X 4 X 24
24	2	BACKUP CLEAT	SEE NOTE 8. PAGE 2	2 X 6 X 30
9	1	CROSSMEMBER	SEE NOTE 8. PAGE 2	2 X 6 X 72


LIST OF MATERIALS PAGE 3


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

LTL 42 FT AND LONGER TRAILERS (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED FROM TABLE I.
2. POSITION CONTAINERS ON THE TRAILER AS SHOWN IN TABLE I. BLOCK AND TIE DOWN USING THE PRINCIPLES SHOWN ON THIS PAGE AND PAGES 2 AND 3 AND THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
3. THE NUMBERS ON EACH ROW OF A STACK IS THE NUMBER OF CONTAINERS STACKED IN THE ROW.
4. SEE DETAIL C FOR BLOCKING AND BRACING VARIATIONS FOR LTL.
5. FOR UNITIZING, SEE DETAIL B, PAGE 5.

TABLE I

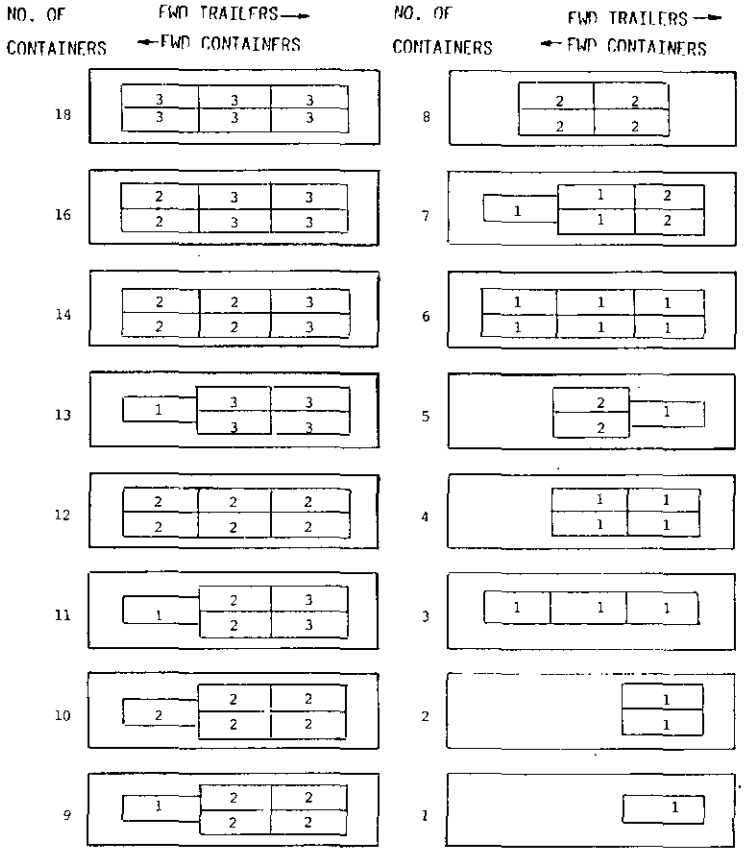

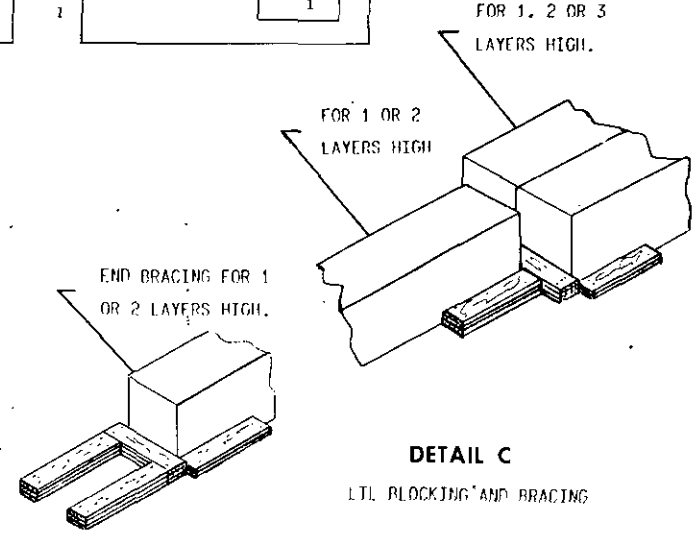

DETAIL C

LTL BLOCKING AND BRACING


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:49Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

1. USING A FORK TRUCK, STACK ONE CONTAINER ON TOP OF THE FIRST CONTAINER. BE SURE TO ALIGN THE STACKING FEATURES. POSITION TWO 1-1/4 X .035 STEEL STRAPS THROUGH THE FORK POCKETS OF THE CONTAINERS AS SHOWN. TENSION AND SEAL WITH ONE DOUBLE NOTCH SEAL FOR EACH STRAP.
2. WHEN STACKING 3 HIGH, POSITION THIRD CONTAINER OVER THE TWO STRAPPED CONTAINERS AND ALIGN WITH STACKING FEATURES. POSITION TWO 1-1/4 X .035 STEEL STRAPS THROUGH THE FORK POCKETS OF THE SECOND AND THIRD CONTAINERS AS SHOWN. TENSION AND SEAL WITH ONE DOUBLE NOTCH SEAL FOR EACH STRAP.

WARNING

WHEN LOADING/UNLOADING TRAILERS WITH UNITIZED CONTAINERS, EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING. SPECIAL ATTENTION SHOULD BE GIVEN TO APPROPRIATE BACKUP OF OUTBOARD CONTAINERS.

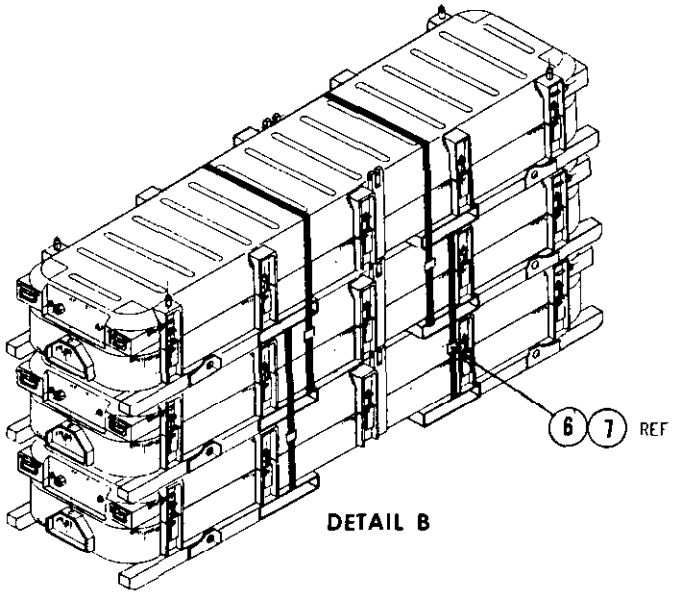

DETAIL B

WARNING

TO AVOID TOPPLING, SPECIAL CARE SHOULD BE TAKEN WHEN MOVING STACKS OF CONTAINERS. THE UNITIZING OF THE CONTAINERS IS AUTHORIZED AS PART OF THE TRUCKLOADING PROCEDURE ONLY. UNITIZING IS TO ENSURE CONTINUOUS ENGAGEMENT OF THE STACKING FEATURES AND MOVEMENT OF UNITIZED CONTAINERS SHOULD BE LIMITED TO THAT NECESSARY TO LOAD AND UNLOAD THE FLATBED TRAILER. CONTAINERS SHALL BE DEUNITIZED AFTER UNLOADING THE VEHICLE.

REVIEW ACTIVITY:
NAVY - OS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-N823)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T23:49Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE 1989: - 604-033/13850