MILITARY STANDARD

MIL-STD-1320-257
(NAVY)
1 MAY 1991

TRUCKLOADING


RAM ROUND PACK

IN MK 749 MOD 0 CONTAINER


UNIT LOAD DATA

DIMENSIONS . . . . 141 L X 34 W X 21 3/4 H
GROSS WEIGHT . . . . . 1180 LBS Δ
CUBE . . . . . 60.4 CU FT

Δ DO NOT USE FOR SHIPPING WEIGHT
FOR HAZARD CLASSIFICATION, SEE NAVSEA OP 2165.

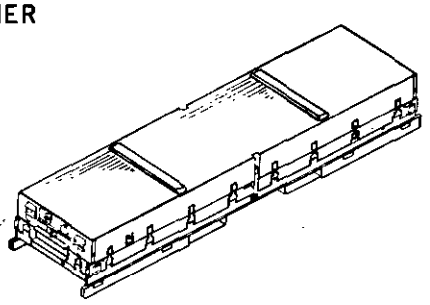

MK 749 MOD 0 CONTAINER

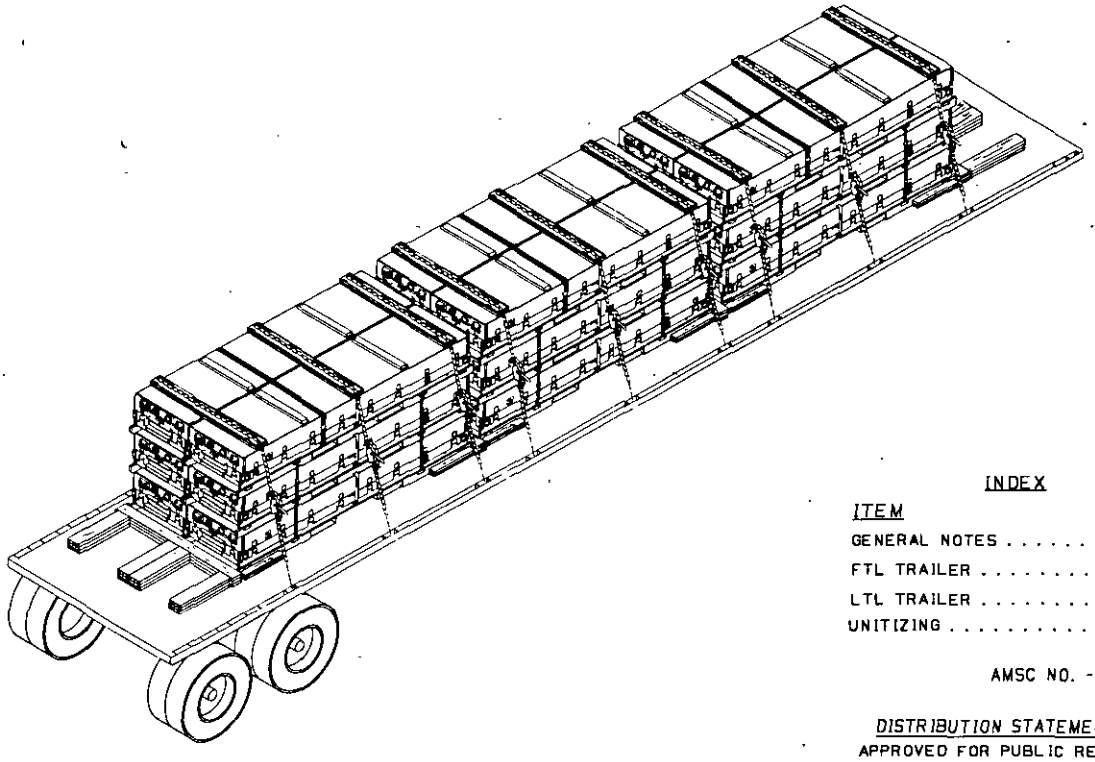

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL TRAILER	2 & 3
LTL TRAILER	4
UNITIZING	2

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY.

SIGNATURE TDA, WPNSTA EARLE DATE 5/1/91

SIGNATURE SEASYSCOM BY DIRECTION DATE 5/1/91


ORIGINATOR David L Rogers 4/26/91 DATE

WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING RAM ROUND PACKS IN SHIPPING AND STORAGE CONTAINER, MK 749 MOD 0.
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 44 FT THROUGH 48 FT FLATBED TRAILERS WITH THE TRAILERS TANDEM AXLES LOCATED IN ANY POSITION'. DO NOT USE TRAILERS WITH METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE TO ONE BASIS FOR TIE DOWNS.
4. STEEL STRAPPING USED AS TIE DOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY) EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. PROTECTOR BOARDS (DOUBLED 2 X 6'S) SHALL BE USED UNDER THE TIE DOWNS. WHEN USING STEEL STRAPPING, THE STRAPS SHALL BE STAPLED TO THE PROTECTOR BOARD USING 2 INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIE DOWN.
7. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION, REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
8. UNLESS OTHERWISE SPECIFIED, DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
9. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
10. AFTER THE BLOCKING, BRACING AND TIE DOWNS HAVE BEEN INSPECTED, THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT WATERPROOF TARPAULINS. THE TARPAULINS MAY BE UNDER THE TIE DOWNS.
11. AFTER THE TARPAULINS ARE IN PLACE, ATTACH THE APPLICABLE PLACARDS TO BOTH SIDES, FRONT AND BACK OF THE TRAILER AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSABLE AREA ON THE BACK DECK OF THE TRAILER.
12. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

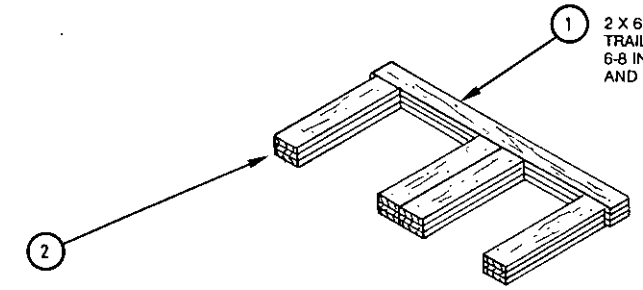

1 2 X 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR WITH 16d NAILS EVERY 6-8 INCHES. NAIL 2ND PIECE TO 1ST AND 3RD TO 2ND IN LIKE MANNER.

2 2 X 6 TRIPLED. NAIL 1ST PIECE TO TRAILER FLOOR WITH 8-16d NAILS. NAIL 2ND PIECE TO 1ST AND 3RD TO 2ND IN LIKE MANNER.


DETAIL A

Source: https://assist.dla.mil - Downloaded: 2026-10-28T20:49Z
Check the source to verify that this is the current version before use.

FTL 44 FT THROUGH 48 FT TRAILER (FLATBED)
(44 FT TRAILER SHOWN)

NOTE

TARPAULINS OVER CONTAINERS OMITTED FOR CLARITY.

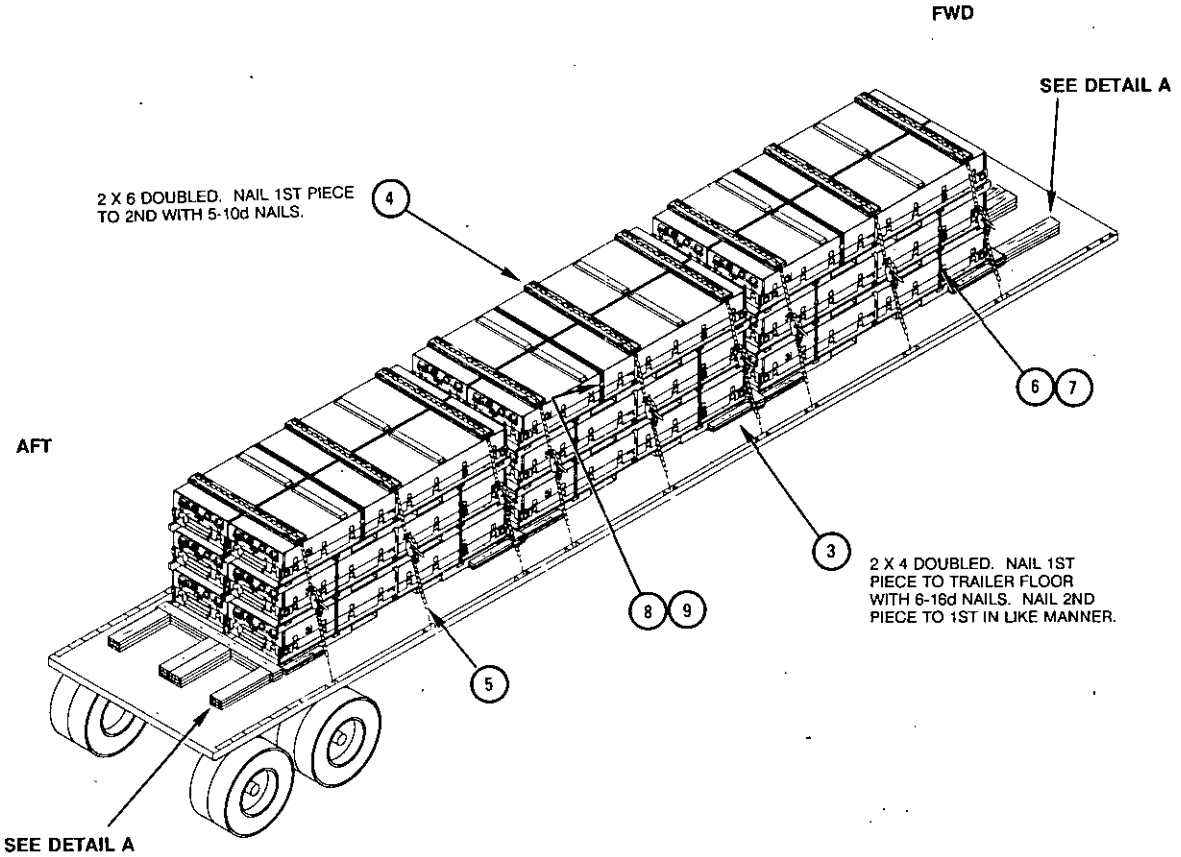

TRUCKLOAD DATA

NUMBER OF CONTAINERS 18

WEIGHT . . . . . 21240 LBS Δ

Δ DO NOT USE FOR SHIPPING WEIGHT

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
3	9	SEAL	SEE NOTE 8 ON PAGE 2	2"
3	8	STEEL STRAP	SEE NOTE 8 ON PAGE 2	2 X .050 X 16 FT
24	7	SEAL	SEE NOTE 8 ON PAGE 2	1-1/4"
24	6	STEEL STRAP	SEE NOTE 8 ON PAGE 2	1-1/4 X .035 X 12 FT
9	5	CHAIN AND LOAD BINDER	SEE NOTE 5 ON PAGE 2	5/16 OR 3/8
18	4	PROTECTOR BOARD	SEE NOTE 6 ON PAGE 2	2 X 6 X 68
24	3	SLEEPER	SEE NOTE 8 ON PAGE 2	2 X 4 X 24
24	2	BACKUP CLEAT	SEE NOTE 8 ON PAGE 2	2 X 6 X 30
12	1	CROSSMEMBER	SEE NOTE 8 ON PAGE 2	2 X 6 X 72

LIST OF MATERIALS


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.


LTL 44 FT THROUGH 48 FT TRAILERS (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED FROM TABLE I.
2. POSITION CONTAINERS ON THE TRAILER AS SHOWN IN TABLE I. BLOCK AND TIE DOWN USING THE PRINCIPLES SHOWN ON PAGES 3 AND 5 AND THE GENERAL DOCUMENT MIL-STD-1320 (NAVY).
3. DETAIL B SHOWS THE LESS-THAN-TRUCKLOAD BLOCKING METHODS FOR STACKS OF ONE WIDE CONTAINERS OR WHERE 1 WIDE MEETS 2 WIDE CONTAINERS.

TABLE I

• 20 FT TRAILER OR LONGER
•• 32 FT TRAILER OR LONGER

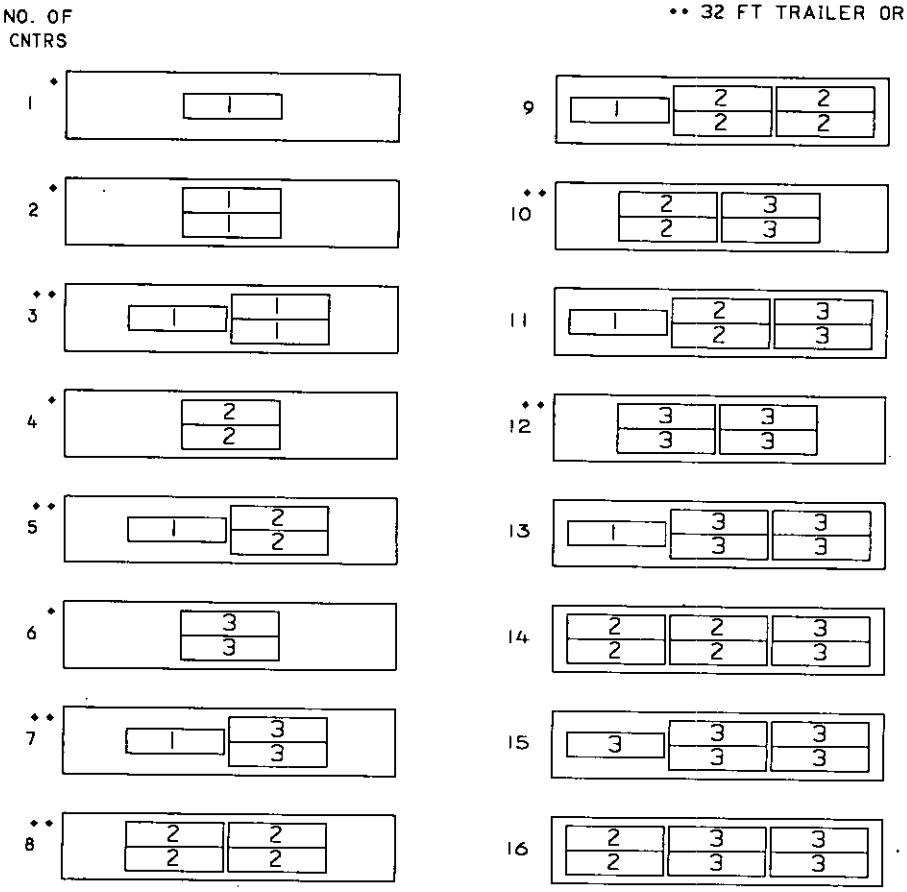

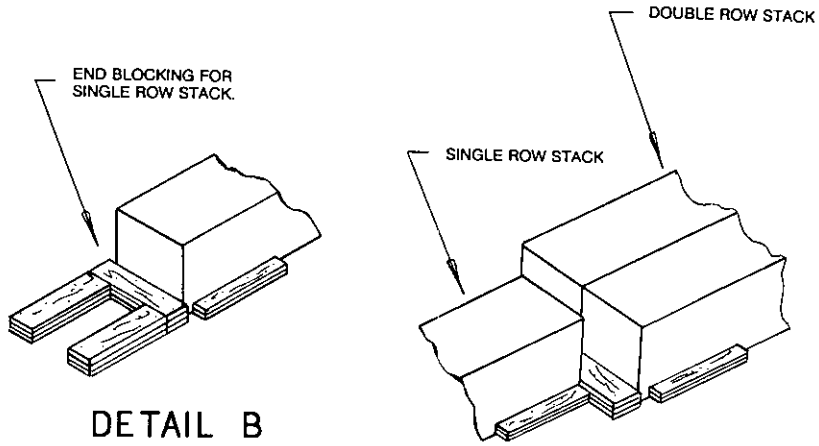


DETAIL B

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURE

1. USING A FORK TRUCK, STACK ONE CONTAINER ON TOP OF ANOTHER. BE SURE TO ALIGN THE STACKING FEATURES. POSITION TWO 1-1/4 X .035 STEEL STRAPS THROUGH THE INNER RECTANGULAR OPENINGS OF THE CONTAINERS AS SHOWN. TENSION AND DOUBLE NOTCH SEAL.
2. REPEAT THIS PROCEDURE FOR THE THIRD CONTAINER AS SHOWN.

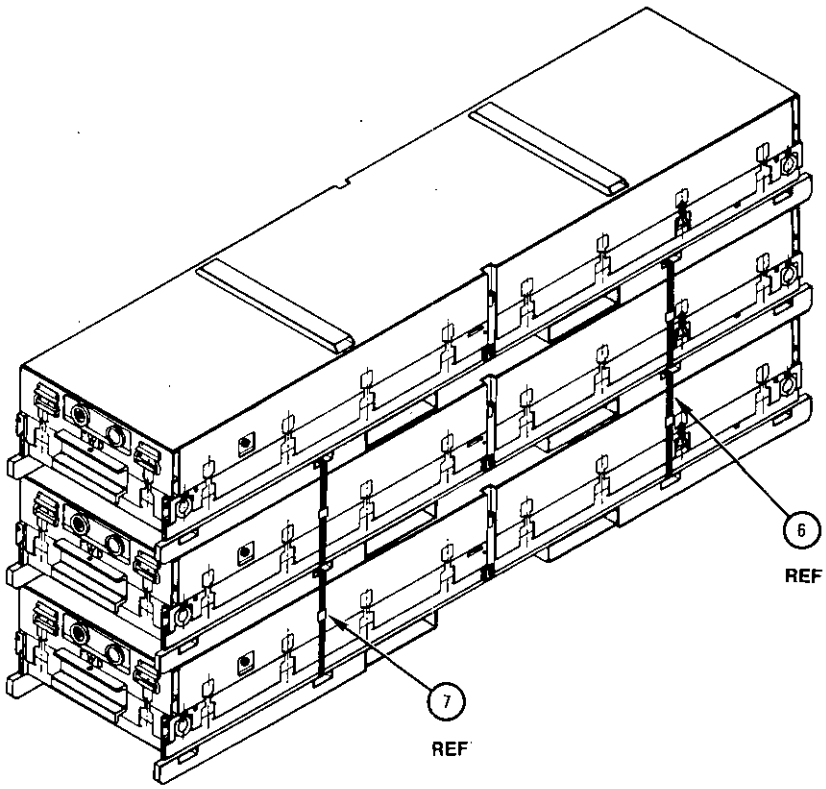

DETAIL C

WARNING

TO AVOID TOPPLING, SPECIAL CARE SHOULD BE TAKEN WHEN MOVING 3 HIGH STACKS. 3 HIGH UNITIZING IS AUTHORIZED FOR LOADING AND UNLOADING ONLY. THE TOP CONTAINER SHOULD BE DEUNITIZED AFTER UNLOADING THE VEHICLE.

★U.S. GOVERNMENT PRINTING OFFICE: 1991-604-034/70004

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-1320-257 - Truckload f/RAM Round Pack in MK 749 Container,

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.