MILITARY STANDARD

MIL-STD-1323-412
(NAVY)
22 MAY 1997

UNIT LOAD
FOR UNDERWAY REPLENISHMENT

BOMB FUZE, FMU-152/B
IN CONTAINER M548

UNIT LOAD DATA

NUMBER OF FUZES PER CONTAINER 9

NUMBER OF CONTAINERS PER UNIT LOAD 24

NUMBER OF FUZES PER UNIT LOAD 216

GROSS WEIGHT OF ONE CONTAINER . . . . . 62 LBS

WEIGHT OF STEEL STRAPPING . . . . . 6 LBS

WEIGHT OF PALLET . . . . . 94 LBS

WEIGHT OF WOOD DUNNAGE . . . . . 60 LBS

GROSS WEIGHT OF UNIT LOAD ■ . . . . . 1,648 LBS

CUBE . . . . . 40.1 CU FT


■ DO NOT USE FOR SHIPPING WEIGHT.

FOR HAZARD CLASSIFICATION SEE SW020-AC-SAF-010/020/030.


DO NOT STACK MORE THAN 5 UNIT LOADS HIGH IN STORAGE.

FOR UNIT LOAD QUALIFICATION SEE NWHC TEST REPORT 8685.

FOR QUALIFICATION OF ONE-LAYER UNIT LOAD SEE NWSE TEST REPORT NO. 95006.

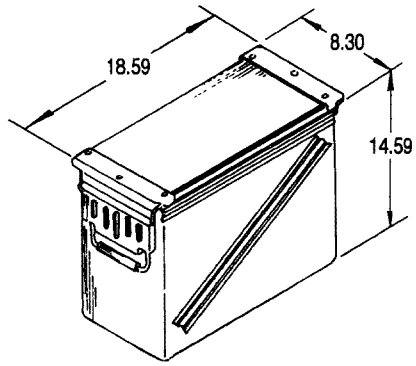

SHIPPING CONDITION
U.S. AIR FORCE (EGLIN AFB FL)
DWG. 9331921

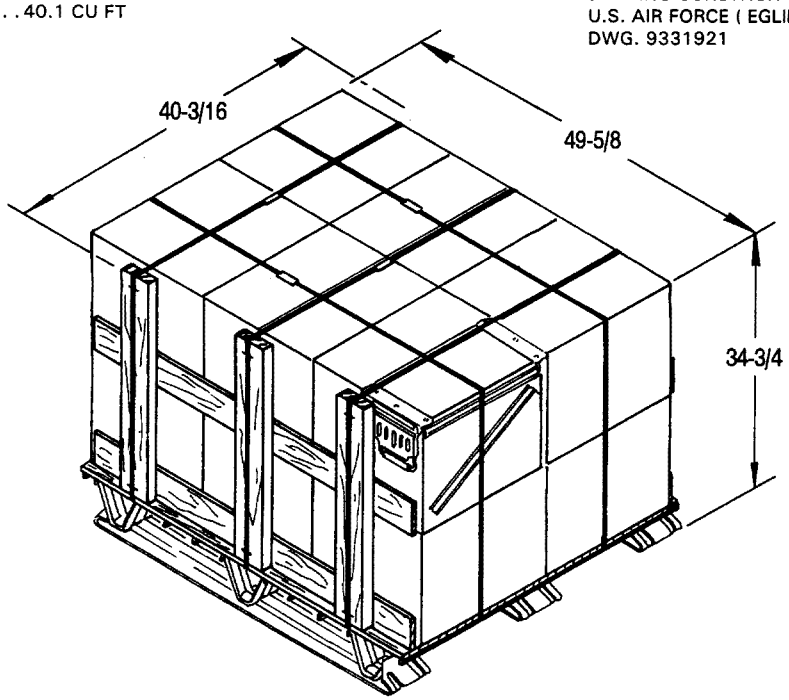

AMSC NO.-NA

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING, AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236.

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

REV	REVISION DESCRIPTION	DATE	TDA	SYSCOM

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE, AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

SIGNATURE TDA, WPNSTA EARLE 5/30/97 DATE

SIGNATURE AIRSYSCOM BY DIRECTION 6/2/97 DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR 5/30/97 DATE

NAVAL WEAPONS STATION EARLE
COLTS NECK, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:00Z
Check the source to verify that this is the current version before use.

MIL-STD-1323-412 (NAVY)

PALLETIZING PROCEDURE:

(A) FABRICATE TWO SIDE FRAME ASSEMBLIES AS SHOWN IN DETAIL B.

(B) THREAD LONGITUDINAL STRAPS, ITEM 2, BETWEEN 6TH AND 7TH DECK WIRES ON BOTH SIDES OF PALLET AS SHOWN IN DETAIL A.

(C) POSITION BASE SHEET, ITEM 8, ON PALLET DECK AS SHOWN IN DETAIL A.

(D) POSITION 24 CONTAINERS ON BASE SHEET WITH EQUAL UNDERHANG ON BOTH SIDES AND EQUAL OVERHANG ON BOTH ENDS.

(E) BRING LONGITUDINAL STRAPS, ITEM 2, OVER TOP OF UNIT LOAD. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 4.


(F) POSITION SIDE FRAME ASSEMBLIES AGAINST BOTH SIDES OF UNIT LOAD AS SHOWN BELOW.

(G) POSITION LATERAL STRAPS, ITEM 3, UNDER PALLET DECK, OVER VERTICAL BATTENS OF THE SIDE FRAME ASSEMBLIES, AND OVER TOP OF UNIT LOAD. TENSION AND SECURE EACH STRAP WITH ONE DOUBLE NOTCHED SEAL, ITEM 4.

(H) SECURE LATERAL STRAPS TO VERTICAL BATTENS WITH STAPLES, ITEM 5, IN LOCATIONS SHOWN BELOW (2 STAPLES PER BATTEN).

(J) FOR PARTIAL UNIT LOAD PROCEDURES SEE PAGE 4.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129 (NAVY).

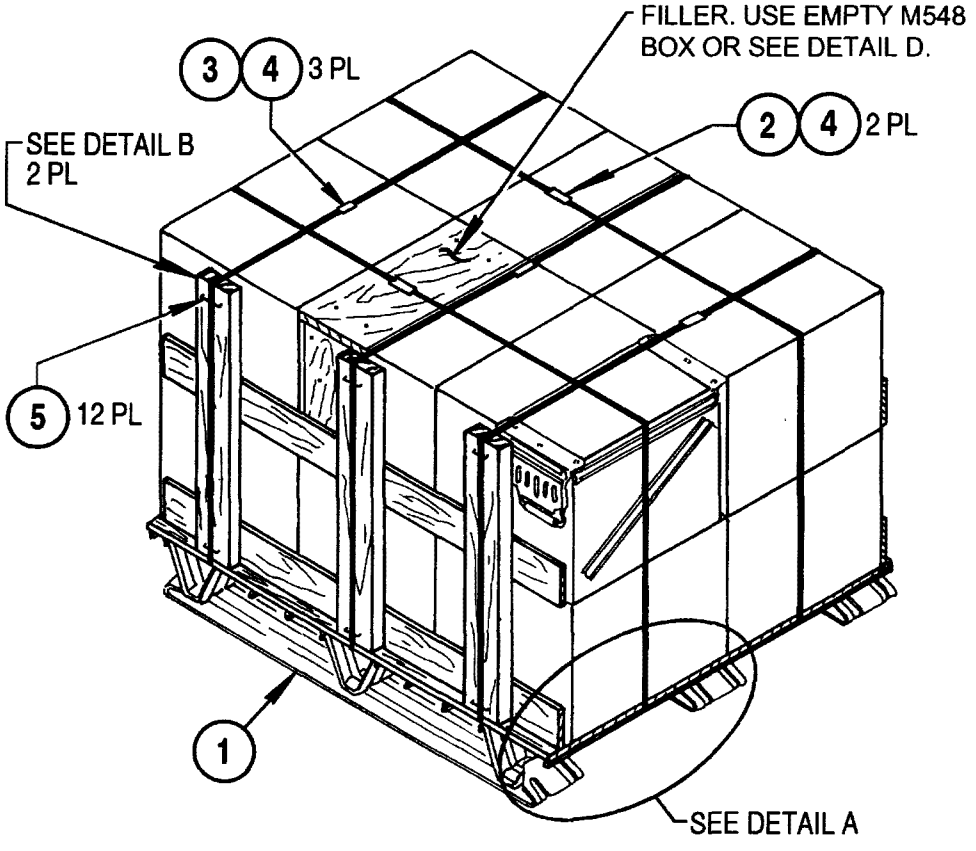

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1323.

DEPALLETIZING PROCEDURE:

(A) CUT AND REMOVE ALL STAPLES AND STRAPPING.


(B) REMOVE SIDE FRAME ASSEMBLIES.

(C) REMOVE CONTAINERS.


LIST OF MATERIALS

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
1	8	BASE SHEET	PLYWOOD	40 X 48 X 3/4
4	7	BATTEN, HORIZONTAL	PLYWOOD	1/2 X 4 X 48
6	6	BATTEN, VERTICAL	WOOD	2 X 4 X 28-3/4
12	5	STAPLES	STEEL	3/4" SIZE
5	4	STRAP SEAL	STEEL	3/4" SIZE
3	3	STRAPPING, LATERAL	STEEL	3/4 X .035 X 14 FT
2	2	STRAPPING, LONGITUDINAL	STEEL	3/4 X .035 X 15 FT
1	1	PALLET, MK 3 MOD 0	564200	40 X 48 X 4-3/4


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.

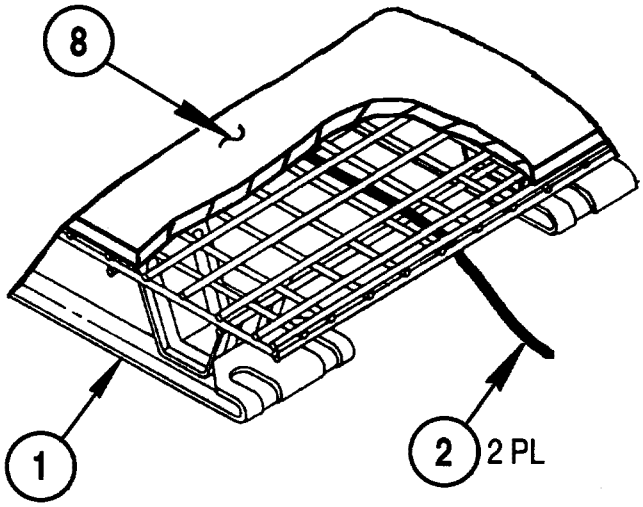

DETAIL A

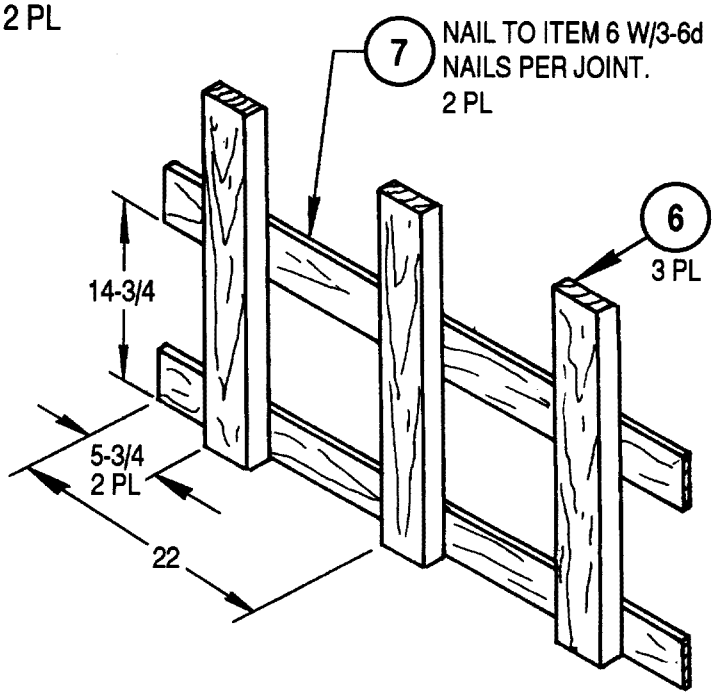

DETAIL B
SIDE FRAME ASSEMBLY
(2 REQUIRED)

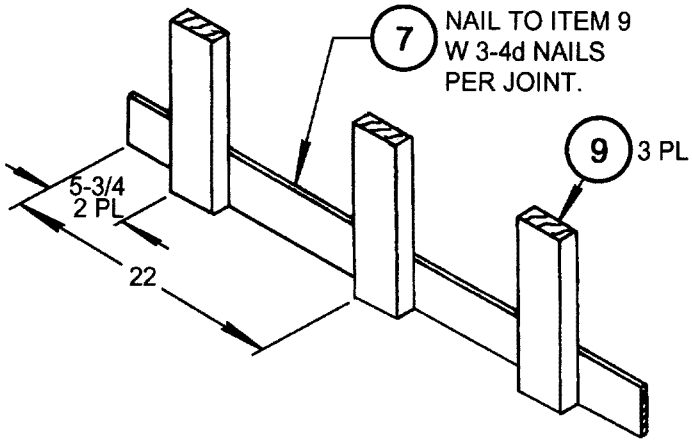



DETAIL C
SIDE FRAME ASSEMBLY
FOR ONE-LAYER HIGH

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T06:00Z
Check the source to verify that this is the current version before use.

PARTIAL UNIT LOAD PROCEDURES:

(A) ONE-LAYER HIGH UNIT LOADS SHALL BE UNITIZED AS SHOWN BELOW. FABRICATE SIDE FRAME ASSEMBLIES AS SHOWN IN DETAIL C ON PAGE 3.
(B) FOR PARTIAL LAYERS, USE EMPTY M548 BOXES OR THE ASSEMBLY SHOWN IN DETAIL D AS FILLERS FOR MISSING CONTAINERS. EMPTY M548 BOXES USED AS FILLERS MUST BE CLEARLY MARKED ON THE COVER THAY THEY ARE EMPTY.
(C) FILLERS SHALL BE POSITIONED AT THE CENTER OF THE UNIT LOAD, NOT ON THE ENDS. IN A TWO-LAYER HIGH PARTIAL UNIT LOAD, ALL FILLERS SHALL BE IN THE UPPER LAYER.

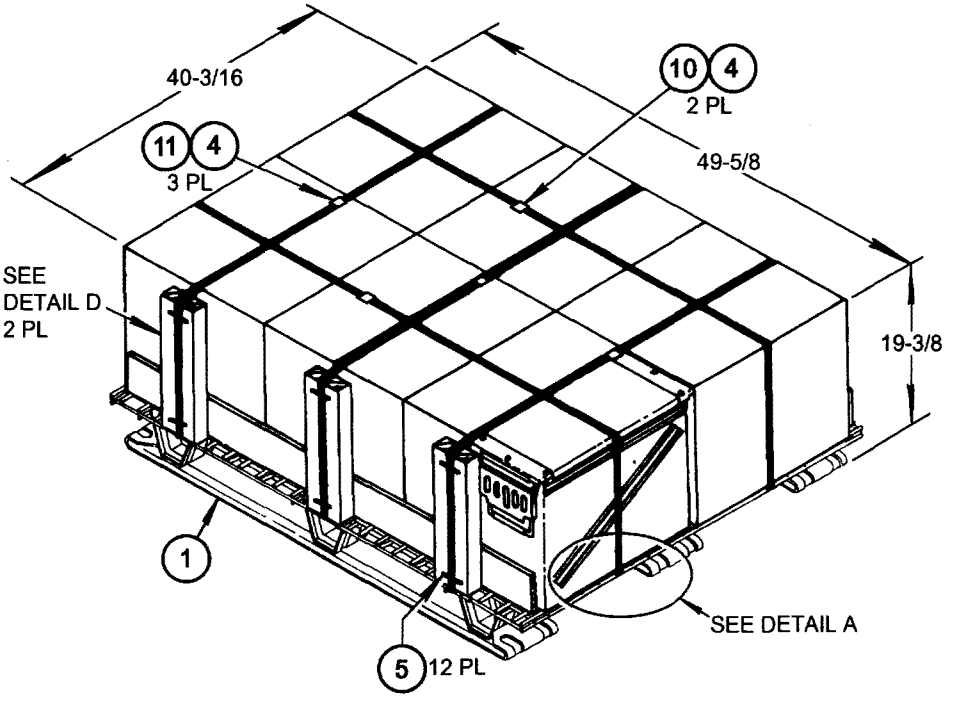

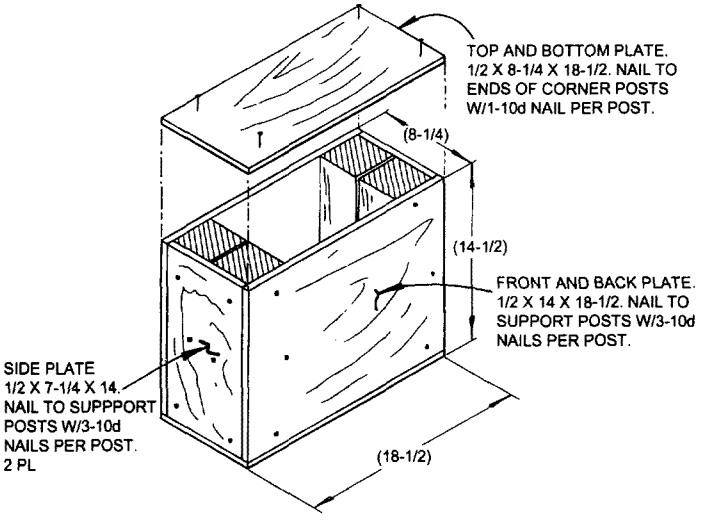

DETAIL D

PARTIAL LAYER
FILLER ASSMEBLY

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
3	11	LATERAL STRAPPING	STEEL	3/4 X .035 X 11 FT
2	10	LONGITUDINAL STRAPPING	STEEL	3/4 X .035 X 12 FT
6	9	VERTICAL BATTEN	WOOD	2 X 4 X 14-1/2

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.