MILITARY STANDARD

MIL-STD-1386-19
(NAVY)


30 OCTOBER 1972

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

FIN ASSEMBLY, BOMB FOR 500 LB BOMB MK 82 IN CRATE MK 17 MOD 0 FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54/48
WEIGHT	792 LBS
DIMENSIONS	56 L x 36 W x 41 1/8 H
CUBE	47.9 CU FT
DOT HAZARD CLASSIFICATION	INERT
COAST GUARD CLASS	NONE

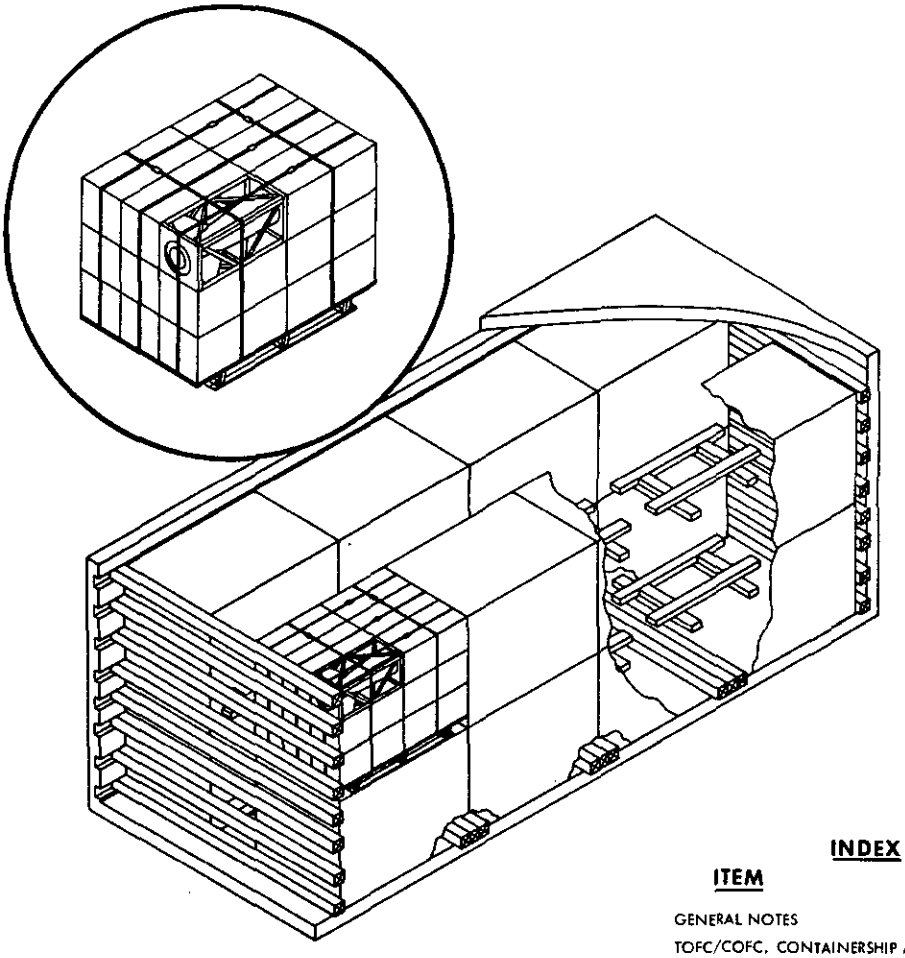

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC, CONTAINERSHIP AND HIGHWAY	2 & 3

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO COMPREHENSIVE INDEX MIL-HDBK-236.

AUTHORIZED FOR TRAILER-ON-FLATCAR (TOFC), CONTAINER-ON-FLATCAR (COFC), CONTAINERSHIP, AND HIGHWAY SHIPMENTS.

SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

SIGNATURE (AIR) SYSCOM BY DIRECTION DATE

ORIGINATOR

SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
N A D EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF BOMB FINS FOR 500 LB L.D. MK 82 BOMBS, IN MK 17 MOD 0 CRATES. THE UNIT LOAD SHALL BE IN ACCORDANCE WITH W-52/48.
2. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6 C AND SHIPPED ON FLATCARS THAT MEET THE REQUIREMENTS OF PAMPHLET 6 C.
3. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6 C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR.

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.

4. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND ARE STOWED IN THE FLOOR, THREE BETWEEN EACH STACK, AND SECURED WITH 16 GA WIRE TIED TO THE PALLET LEGS.
5. THE DUNNAGE SPECIFIED IS OF NOMINAL SIZE. FOR EXAMPLE, 1 x 4 MATERIAL IS ACTUALLY 3/4 THICK BY 3 5/8 WIDE AND 2 x 6 MATERIAL IS ACTUALLY 1 5/8 THICK BY 5 1/2 WIDE.
6. WHEN THE VOID BETWEEN THE CROSSMEMBERS AND THE UNIT LOADS IS GREATER THAN ONE INCH USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND GATE AS SHOWN IN DETAIL B.
7. APPLICABLE MATERIAL SPECIFICATIONS:
   - DUNNAGE LUMBER - FED. SPEC. MM-L-751
   - NAILS - FED. SPEC. FF-N-105, COMMON CEMENT COATED (ALTERNATE - ANNULAR RING OR CHEMICALLY ETCHED TYPE).
8. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL CONTAINER DOORS.


TOFC/COFC, CONTAINERSHIP AND HIGHWAY

1. THE CONTAINERLOAD CONSISTS OF 16 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT.
2. THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS:
   A. ONE CONTAINER ON A 20-FT MILVAN CHASSIS WITH A DOUBLE BOGIE LOCATED IN THE NEXT TO LAST HOLE AND PULLED BY A SINGLE DRIVE AXLE TRACTOR.
   B. TWO CONTAINERS ON A 40-FT MILVAN CHASSIS WITH TWO BOGIES LOCATED IN THE REARMOST POSITION AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR.
3. ONE OR TWO LOADED CONTAINERS MAY ALSO BE TRANSPORTED OVER PUBLIC HIGHWAYS ON COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY. CONTAINERS MUST BE ADEQUATELY SECURED TO THE EQUIPMENT.
4. THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC. WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED:
   A. ONE CONTAINER ON A 20-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.
   B. TWO CONTAINERS ON A 40-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.

WARNING


CHASSIS CONTAINERS COUPLED INTO A 40-FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC RAILCAR. THE REAR END OF THE 40-FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END. 20-FT AND 40-FT UNITS CAN BE LOADED ON THE SAME CAR.

5. SWAY BRACE, DETAIL A, IS ASSEMBLED IN PLACE. PIECE 1 IS POSITIONED INBOARD OF THE OUTER LEGS OF THE PALLET SKIDS AND PIECE 2 IS POSITIONED AGAINST THE PALLET LEGS. NAIL PIECE 2 TO PIECE 1 WITH THREE 10d NAILS PER JOINT. CUT PIECE 3 TO FIT BETWEEN PIECES 2 AND NAIL TO PIECE 1 WITH THREE 10d NAILS.

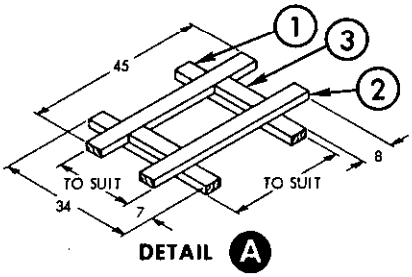

DETAIL A


SWAY BRACE
8 REQUIRED
TO BE ASSEMBLED IN PLACE
SEE NOTE 5

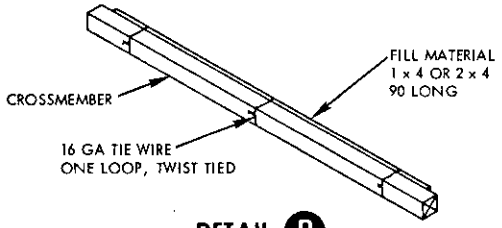


DETAIL B

FILL MATERIAL
SEE GENERAL NOTE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.

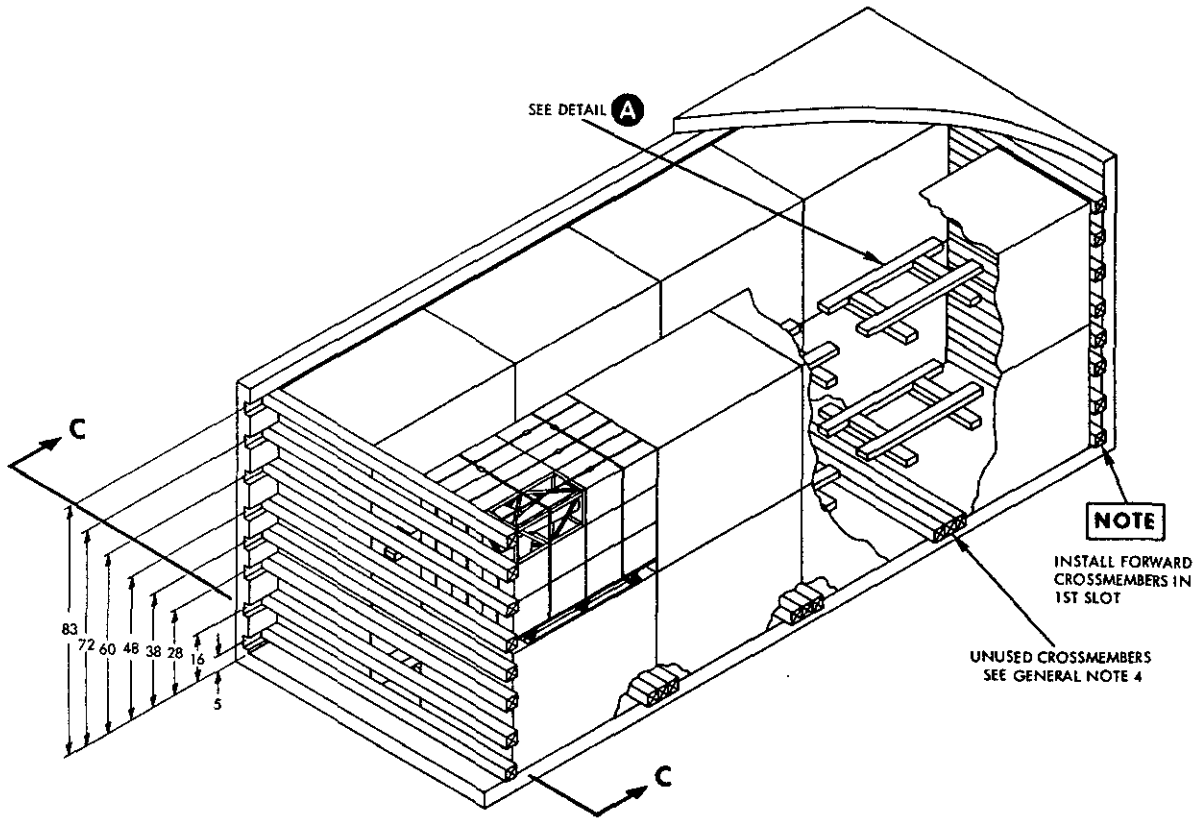

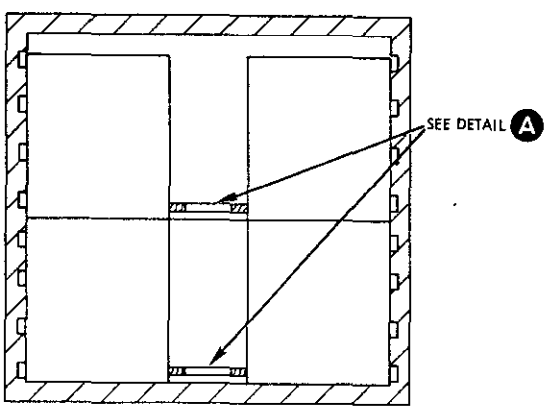

SECTION C-C

CONTAINERLOAD DATA

NUMBER OF UNIT LOADS	16
NUMBER OF CROSSMEMBERS REQ'D	16
LOAD WEIGHT	12,672 LBS
DUNNAGE WEIGHT	202 LBS
CONTAINER WEIGHT	5,785 LBS
GROSS WEIGHT	18,659 LBS

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
3	SPACER	2 x 4 x TO SUIT	16	1	3	10d
2	STRINGER	2 x 4 x 45	16	1	3/JOINT	10d
1	SUPPORT	2 x 4 x 34	16	SEE 2 & 3	-	-

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.