MILITARY STANDARD


MIL-STD-1336-35
(NAVY)
11 JANUARY 1974

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

CARTRIDGE, 40MM, HE
FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54/10
DIMENSIONS	47 L x 35 1/4 W x 27 7/8 H
CUBE	26.7 CU FT
WEIGHT	1190 LBS
DOT HAZARD CLASSIFICATION	CLASS A
COAST GUARD CLASSIFICATION	CLASS IV

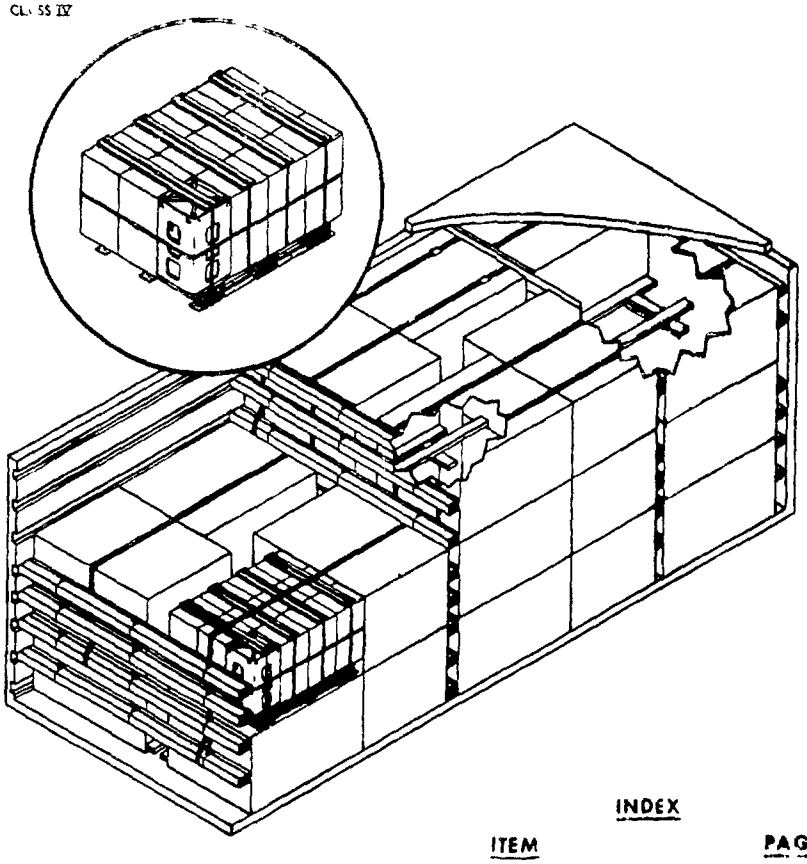

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO THE INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

INDEX

ITEM	PAGE
GENERAL NOTES	2
COFC & CONTAINERSHIP	2 & 3
DETAILS	4

FSC 8140

AUTHORIZED FOR CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND MOVEMENT ABOARD DEPOT (NON-PUBLIC) ROADS ONLY.

APPROVED BY US COAST GUARD
J. Schuning CAPT USCG
DATE 30 October 1973

APPROVED BY BUREAU OF EXPLOSIVES
A. F. Grossmuck
DATE 10/26/73

M S Bixby NWHL 11/7/73
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J E Kelley 11/7/73
SIGNATURE ORD/SYSCOM BY DIRECTION DATE

ORIGINATOR L R Young
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINEP WITH 26 FLEET ISSUE UNIT LOADS OF 40 MM, HE CARTRIDGES THE UNIT LOAD SHALL BE PALLETIZED IN ACCORDANCE WITH WR-54/10
2. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C AND SHIPPED ON FLAT CARS THAT MEET THE REQUIREMENTS OF PAMPHLET 6C
3. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR

CAUTION

WHEN POSITIONING CROSSMEMBERS, MAKE A VISUAL CHECK TO ENSURE THAT THE CROSSMEMBERS ARE LOCKED SECURELY IN PLACE


4. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS, UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT
5. WHEN THE LONGITUDINAL SLACK BETWEEN A CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND UNIT LOAD AS SHOWN IN DETAIL D
6. SWAY BRACES DETAILS E AND F ARE ASSEMBLED IN PLACE INSERT SUPPORTS IN FORK POCKETS AND WITH STRINGERS AGAINST PALLET POSTS, NAIL TO SUPPORTS WITH THREE 10d NAILS CUT SPACER TO FIT BETWEEN STRINGERS AND NAIL TO SUPPORTS WITH THREE 10d NAILS.
7. APPLICABLE MATERIAL SPECIFICATIONS
   DUNNAGE LUMBER - FED SPEC MM-L-751
   NAILS - FED SPEC FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT
   STRAPPING - FED SPEC QQ-S-781, TYPE I, CLASS A
8. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL CONTAINER DOORS. ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF THE CONTAINER FOR THE APPROPRIATE MODE OF TRANSPORTATION AS PRESCRIBED IN OP 2165 (VOL 1)

COFC AND CONTAINERSHIP ONLY


1. THE CONTAINER LOAD CONSISTS OF 26 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT

WARNING

BECAUSE THE WEIGHT LOADED INTO THIS CONTAINER EXCEEDS 34,000 POUNDS, THE MILVAN CHASSIS CANNOT BE USED TO TRANSPORT THE LOADED CONTAINER ON PUBLIC HIGHWAYS THE LOADED CONTAINER MAY BE TRANSPORTED OVER DEPOT ROADS USING MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES OR COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY

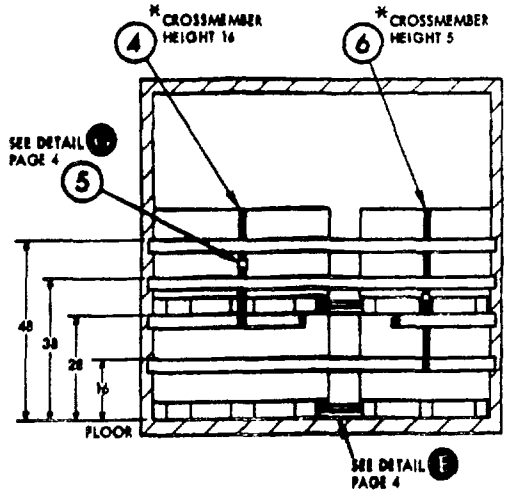


SECTION A-A

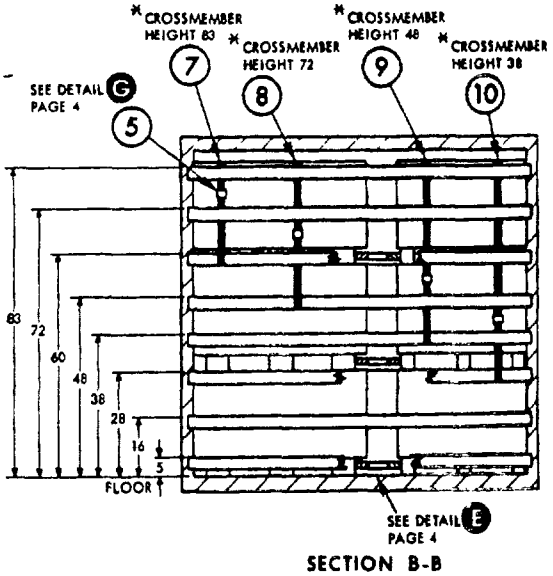

SECTION B-B


*FAR END OF STRAP IS ATTACHED TO FORWARD CROSSMEMBER OF BAY AT THE CROSSMEMBER HEIGHT INDICATED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

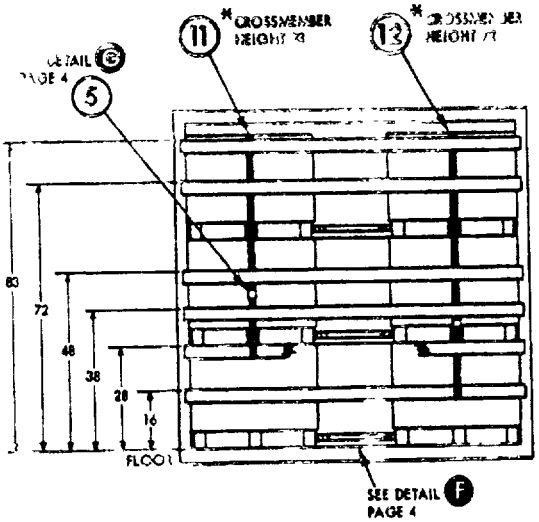

SECTION C-C

*FAR END OF STRAP IS ATTACHED TO FORWARD CROSSMEMBER OF BAY AT THE CROSSMEMBER HEIGHT INDICATED

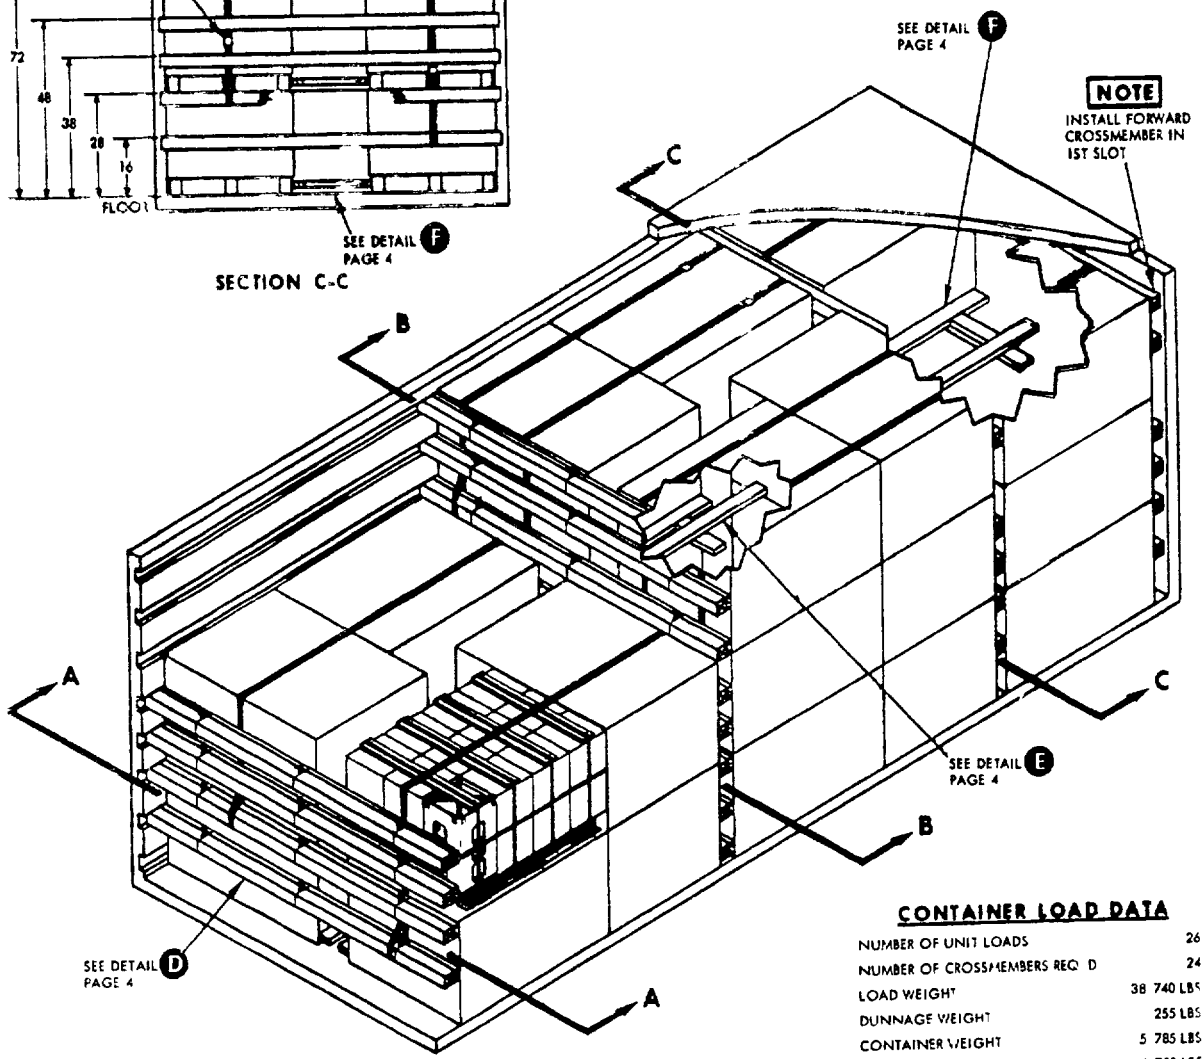

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	26
NUMBER OF CROSSMEMBERS REQ'D	24
LOAD WEIGHT	38 740 LBS
DUNNAGE WEIGHT	255 LBS
CONTAINER WEIGHT	5 785 LBS
GROSS WEIGHT	44,780 LBS


LIST OF MATERIALS AND NAILING DATA

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NAILS NUMBER	NAILS SIZE
16	SPACER	SEE NOTE 6 2 x 4 x TO SUIT	20	15	2 PER JOINT	10d
15	SUPPORT	2 x 4 x 21	20	SEE 13, 14, 16	-	-
14	STRINGER	2 x 4 x 45 1/2	10	15	3 PER JOINT	10d
13	STRINGER	2 x 4 x 33	10	15	3 PER JOINT	10d
12	STRAPPING	1 1/4 x .035 x 15'6	1	-	-	-
11	STRAPPING	1 1/4 x .035 x 13'6	1	-	-	-
10	STRAPPING	1 1/4 x .035 x 20	1	-	-	-
9	STRAPPING	1 1/4 x .035 x 18	1	-	-	-


LIST OF MATERIALS AND NAILING DATA

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NAILS NUMBER	NAILS SIZE
8	STRAPPING	1 1/4 x .035 x 15'6	1	-	-	-
7	STRAPPING	1 1/4 x .035 x 13'6	1	-	-	-
6	STRAPPING	1 1/4 x .035 x 15	1	-	-	-
5	SEAL	FOR 1 1/4 STRAP	16	-	-	-
4	STRAPPING	1 1/4 x .035 x 17 FT	1	-	-	-
3	SPACER	2 x 4 x TO SUIT	6	1	3	10d
2	STRINGER	2 x 4 x 45	6	1	3 PER JOINT	10d
1	SUPPORT	2 x 4 x 33	6	SEE 2	-	-


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

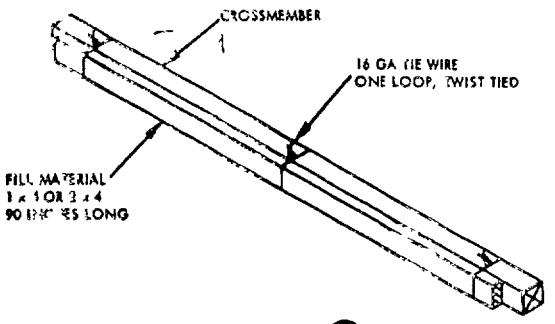


DETAIL D
(SEE GENERAL NOTE 5
PAGE 2)

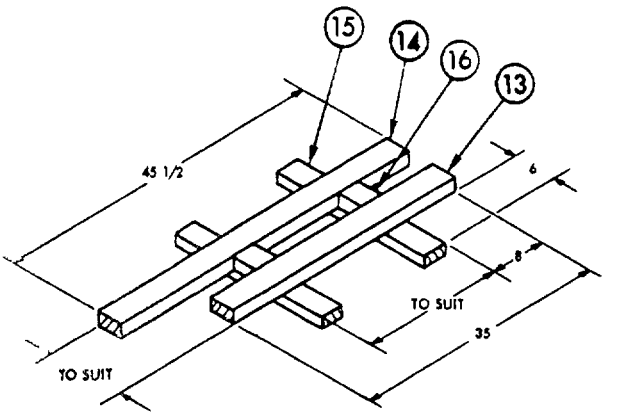

DETAIL E
SWAY BRACE ASSEMBLY
10 REQUIRED
SEE GENERAL NOTE 6

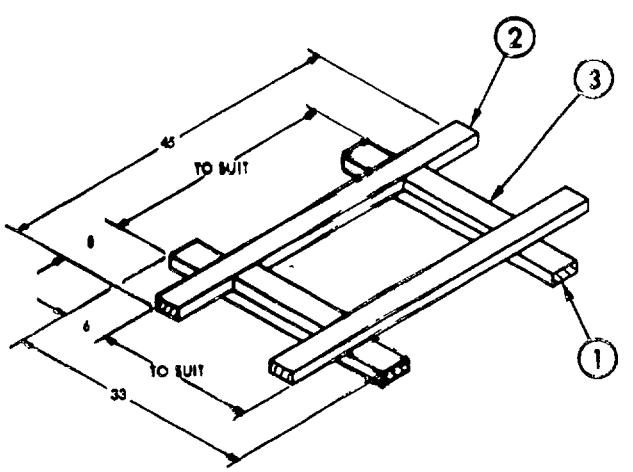

DETAIL F
SWAY BRACE ASSEMBLY
3 REQUIRED
SEE GENERAL NOTE 6

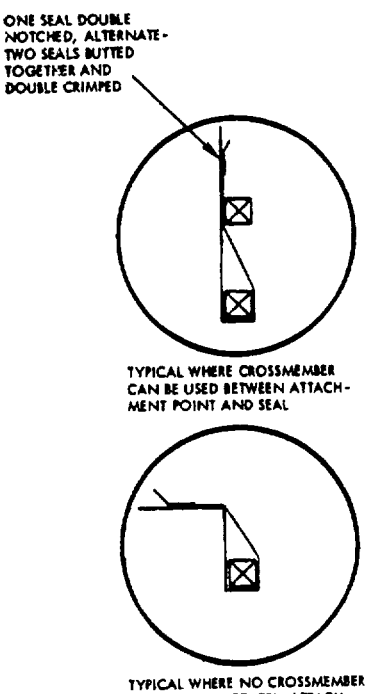

DETAIL G
STRAPPING DIAGRAMS

REVIEW ACTIVITY
NAVY - OS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO 8140-N214)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.