MILITARY STANDARD

MIL-STD-1386-36

(NAVY)

11 JANUARY 1974

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS


BOMB GUIDANCE KIT, KMU-351 A/B

(LESS SEEKER ASSEMBLY)

FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54/236
WEIGHT	484 LBS
DIMENSIONS	57 L x 44 W x 36 3/8 H
CUBE	52.7 CU FT
DOT HAZARD CLASSIFICATION	INERT
COAST GUARD CLASSIFICATION	NONE

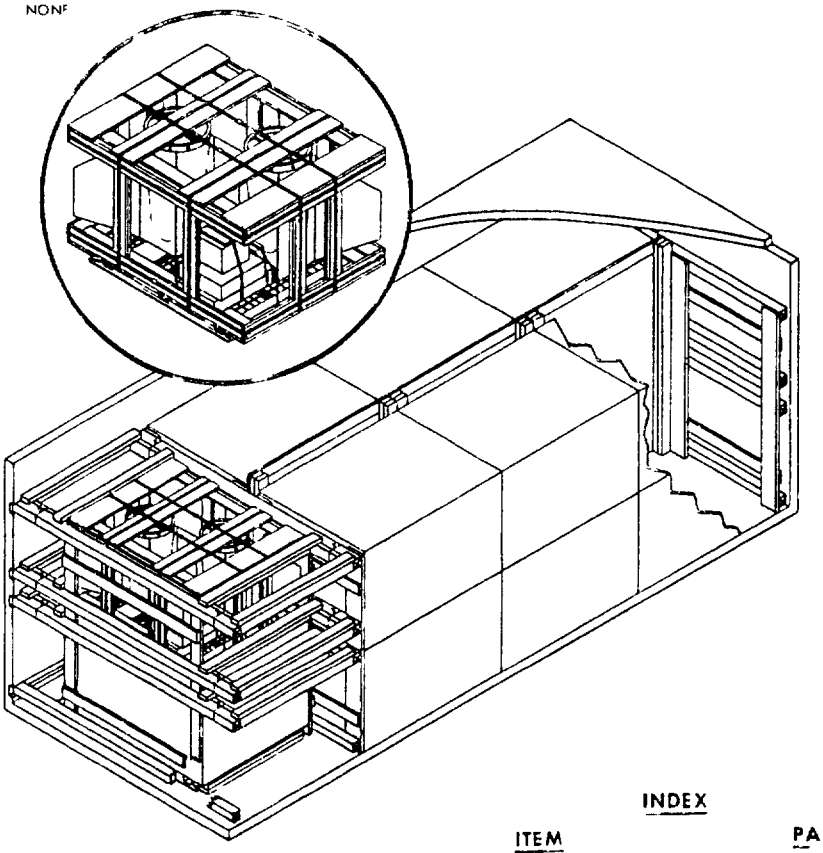

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING TRUCKLOADING AND CARLOADING MILITARY STANDARDS REFER TO THE INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC COFC CONTAINERSHIP & HIGHWAY	2-3
DETAILS	4

FSC 8140

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENTS

M. S. [illegible] MHL 12/10/73
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J. E. Kolk 12/19/73
SIGNATURE AIR SYSCOM BY DIRECTION DATE

ORIGINATOR Charles The Brun 12/5/73
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH 14 UNIT LOADS OF BOMB GUIDANCE KITS, KMU-351 A/B (LESS SEEKER ASSEMBLY) THE BOMB GUIDANCE KITS SHALL BE PALLETIZED IN ACCORDANCE WITH MIL-STD-1366

2 THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C

3 IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT THE CROSSMEMBERS ARE LOCKED SECURELY IN PLACE

4 CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS UNUSED CROSSMEMBERS MUST REMAIN WITH CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT

5 WHEN THE LONGITUDINAL SLACK BETWEEN A CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND UNIT LOAD AS SHOWN IN DETAIL F

6 LENGTH OF STRUT, PIECE 6 SHALL BE SUFFICIENT TO CAUSE DETAIL E TO FILL THE VOID BETWEEN THE UNIT LOAD AND THE CONTAINER SIDE WALL TWIST TIE BOTH ENDS OF THE ASSEMBLY TO THE CROSSMEMBER WITH 16 GAUGE SOFT ANNEALED WIRE

7 APPLICABLE MATERIAL SPECIFICATIONS

DUNNAGE LUMBER – FED SPEC MM-L-751

NAILS – FED SPEC , FF-N-105, TYPE II STYLE 10, COMMON BRIGHT

8 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL CONTAINER DOORS

TOFC/COFC,CONTAINERSHIP AND HIGHWAY

1 THE LOADED MILVAN CONTAINER SHALL BE ON A 20-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES WHEN BEING MOVED IN TOFC SERVICE

2 THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS

A ONE CONTAINER ON 20-FT MILVAN CHASSIS WITH A DOUBLE BOGIE AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR

B TWO CONTAINERS ON A 40-FT MILVAN CHASSIS WITH A DOUBLE BOGIE AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR.

3 THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS USING SUITABLE COMMERCIAL EQUIPMENT OF ADEQUATE CAPACITY AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR CONTAINERS MUST BE ADEQUATELY SECURED TO THE EQUIPMENT


4 THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED

A ONE CONTAINER ON 20-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES


B TWO CONTAINERS ON 40-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES

WARNING

CHASSIS/CONTAINERS COUPLED INTO A 40-FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC RAILCAR THE REAR END OF THE 40-FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END 20-FT AND 40-FT UNITS CAN BE LOADED ON THE SAME CAR

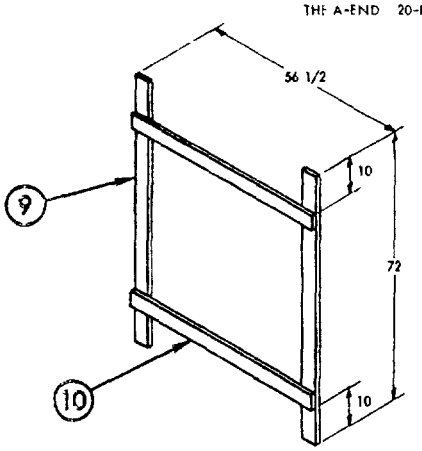

DETAIL A
SEPARATOR GATE
2 REQUIRED

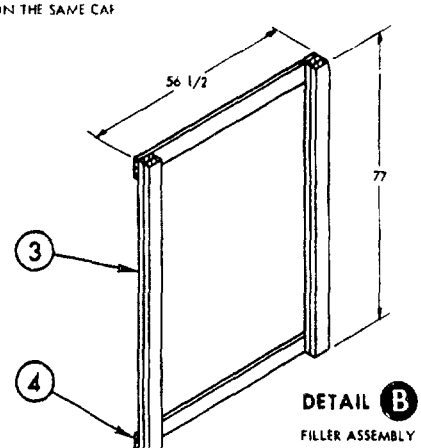



DETAIL B
FILLER ASSEMBLY
3 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	14
NUMBER OF CROSSMEMBERS REQUIRED	12
LOAD WEIGHT	6 776 LBS
DUNNAGE WEIGHT	455 LBS
CONTAINER WEIGHT	5 785 LBS
GROSS WEIGHT	13 016 LBS

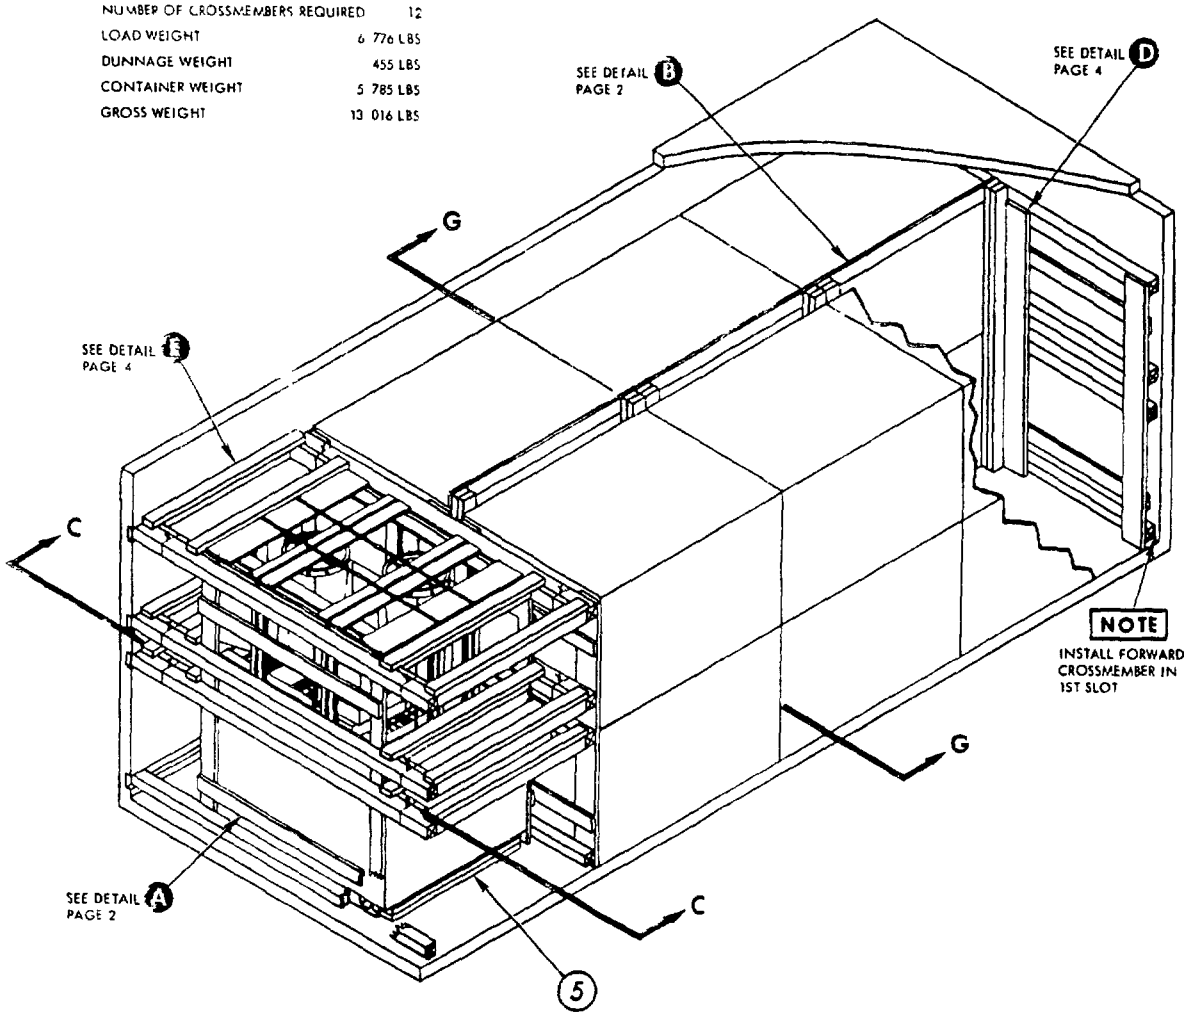

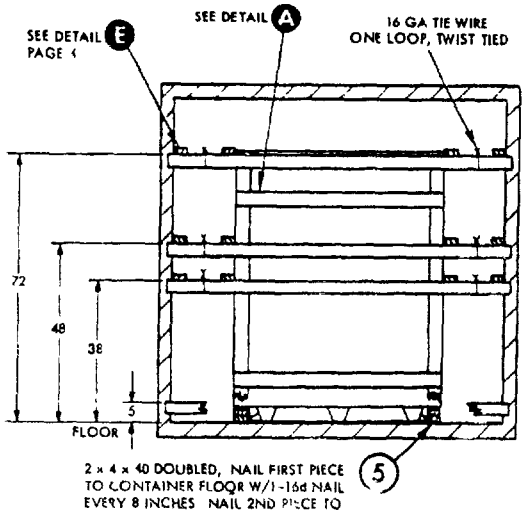


SECTION C-C

*CLINCHED


PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NAILS NUMBER	NAILS SIZE
10	HORIZONTAL	1 x 4 x 56 1/2	4	9	3 PER JOINT	8d*
9	VERTICAL	1 x 4 x 72	4	SEE 10	-	
8	SUPPORT	2 x 4 x 46	12	7	7	10d
7	LONGITUDINAL	2 x 4 x 45	12	6	2 PER JOINT	16d
6	CROSSMEMBER	2 x 4 x TO SUIT	12	SEE 7	-	-
5	SLEEPER	2 x 4 x 40	4	SEE SECTION C-C		
4	HORIZONTAL	1 x 4 x 56 1/2	6	3	3 PER JOINT	10d
3	VERTICAL	2 x 4 x 77	12	-	4	10d
2	HORIZONTAL	1 x 4 x 90	4	SEE 1	-	-
1	VERTICAL	1 x 6 x 72	8	2	3 PER JOINT	8d*

LIST OF MATERIALS AND NAILING DATA


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

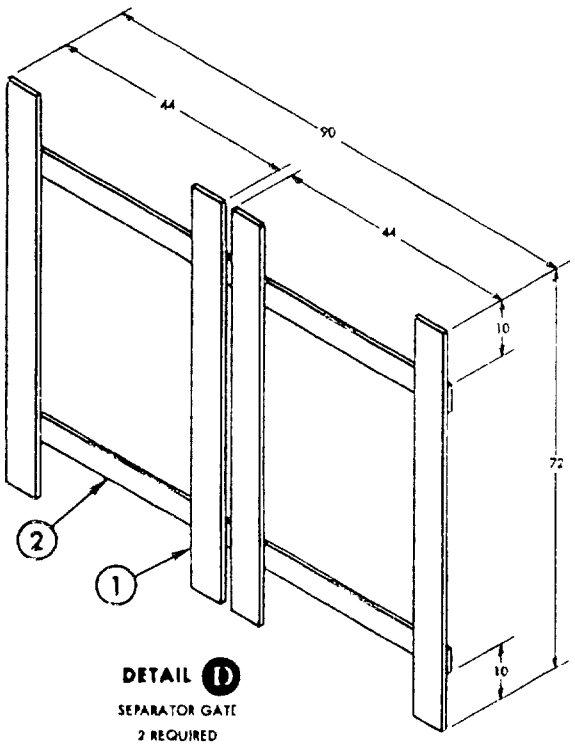


DETAIL D
SEPARATOR GATE
2 REQUIRED

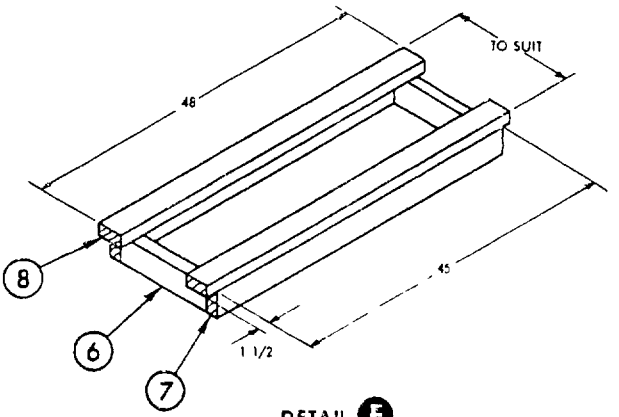

DETAIL E
SWAY BRACE ASSEMBLY
6 REQUIRED
SEE GENERAL NOTE 6

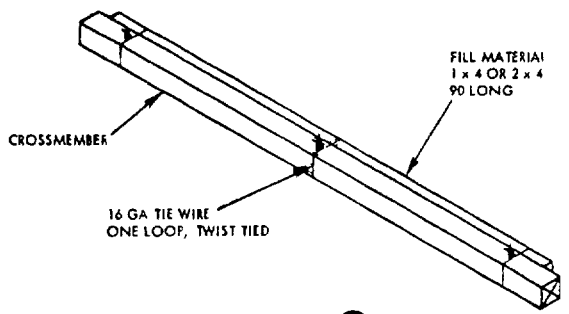

DETAIL F
FILL MATERIAL
SEE NOTE 5

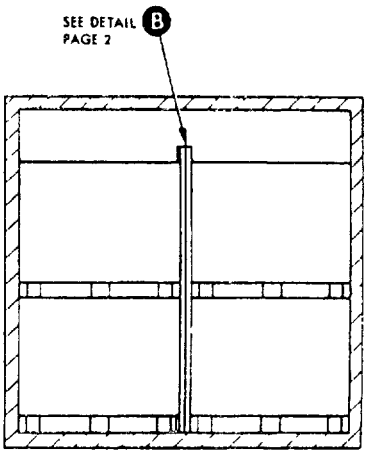

SECTION G-G

REVIEW ACTIVITY
NAVY-OS

PREPARING ACTIVITY
NAVY-OS
PROJECT NO 8140-N218

☆ U S GOVERNMENT PRINTING OFFICE 1977-703 020/616

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.