MILITARY STANDARD

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS


SAFETY AND ARMING DEVICE MK 13 MOD 0 & 1 FOR AIM-9D,9G AND 9H (SIDEWINDER 1C) IN CONTAINER CNU-189/E FLEET ISSUE UNIT LOAD

MIL-STD-1386-39 (NAVY)

15 MAY 1974

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54158
WEIGHT (APPROX)	1107 LBS
DIMENSIONS	46 L x 37 W x 34 H
CUBE	33.4 CU FT
DOT HAZARD CLASSIFICATION	EXPLOSIVES C
COAST GUARD CLASS	I

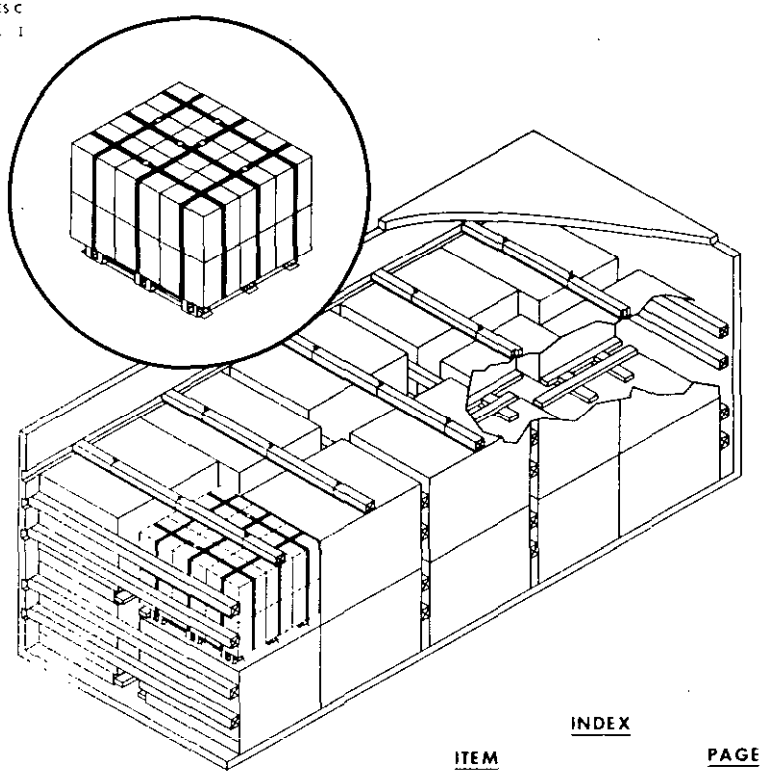

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC, COFC, CONTAINERSHIP & HIGHWAY	2, 3
DETAILS	4

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO THE INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENTS

SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

SIGNATURE AIRSYSCOM BY DIRECTION DATE

US COAST GUARD APPROVAL NOT REQUIRED

APPROVED BY BUREAU OF EXPLOSIVES

DATE

ORIGINATOR

SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF SAFETY AND ARMING DEVICES (SIDEWINDER 1C). THE UNIT LOADS SHALL BE PALLETIZED IN ACCORDANCE WITH WR-54 '158.
2. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C.
3. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR.

CAUTION

WHEN POSITIONING CROSSMEMBERS, MAKE A VISUAL CHECK TO ENSURE THAT THE CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.


4. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT.
5. WHEN THE LONGITUDINAL SLACK BETWEEN A CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND UNIT LOAD AS SHOWN IN DETAIL F.
6. THE VOID BETWEEN THE HOLD DOWN CROSSMEMBER AND THE TOP OF THE UNIT LOAD SHALL NOT EXCEED ONE HALF INCH. IF *REQUIRED, SHIM BETWEEN CROSSMEMBER* AND UNIT LOAD AS SHOWN IN DETAIL E. TWIST TIE SHIM MATERIAL TO CROSSMEMBER WITH THREE PIECES OF 16 GA TIE WIRE.
7. APPLICABLE MATERIAL SPECIFICATIONS:
   DUNNAGE LUMBER - FED. SPEC. MM-L-751
   NAILS - FED. SPEC. FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT.
8. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA, CLOSE AND SEAL CONTAINER DOORS.

TOFC/COFC,CONTAINERSHIP AND HIGHWAY


1. THE CONTAINER LOAD CONSISTS OF 20 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH *THIS DOCUMENT*
2. THE LOADED MILVAN CONTAINER MUST BE ON A 20 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES WHEN BEING MOVED IN TOFC SERVICE.
3. WHEN THE MILVAN CONTAINER IS SHIPPED TOFC OR COFC, THE RAIL CAR SHALL COMPLY WITH THE REQUIREMENTS OF THE BUREAU OF *EXPLOSIVES PAMPHLET 6C.*
4. THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON A 20 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES OR ON SUITABLE COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY.

NOTE

IN CERTAIN STATES THE GROSS VEHICLE WEIGHT (G.V.W. - CONTAINER CHASSIS AND TRACTOR) IS LIMITED BY THE DISTANCE BETWEEN THE 1ST AND THE LAST AXLES OF THE ASSEMBLED RIG. CARE SHOULD BE TAKEN TO SEE THAT THE PROPOSED G.V.W. *DOES NOT EXCEED THESE LIMITATIONS.*

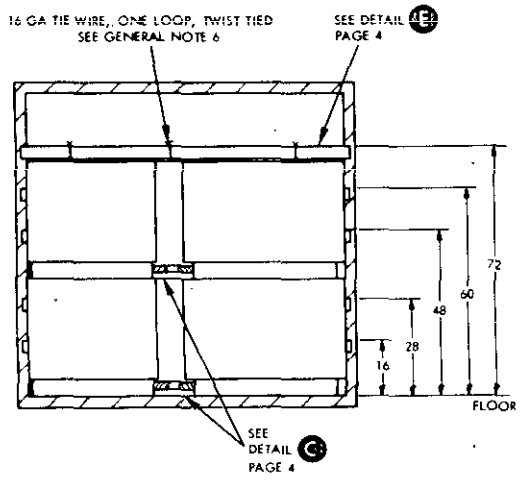

SECTION A-A

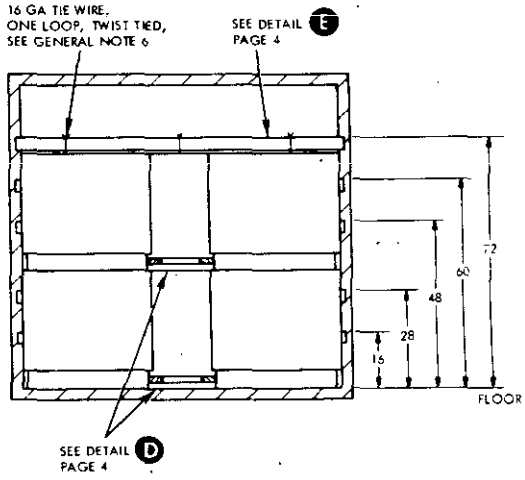


SECTION B-B

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

CONTAINER LOAD DATA


NUMBER OF UNIT LOADS 20
NUMBER OF CROSSMEMBERS REQ'D 21
LOAD WEIGHT (APPROX.) . . . . . 22,140 LBS
DUNNAGE WEIGHT (APPROX.) . . . . . 232 LBS
CONTAINER WEIGHT . . . . . 5,785 LBS
GROSS WEIGHT (APPROX.) . . . . . 28,157 LBS

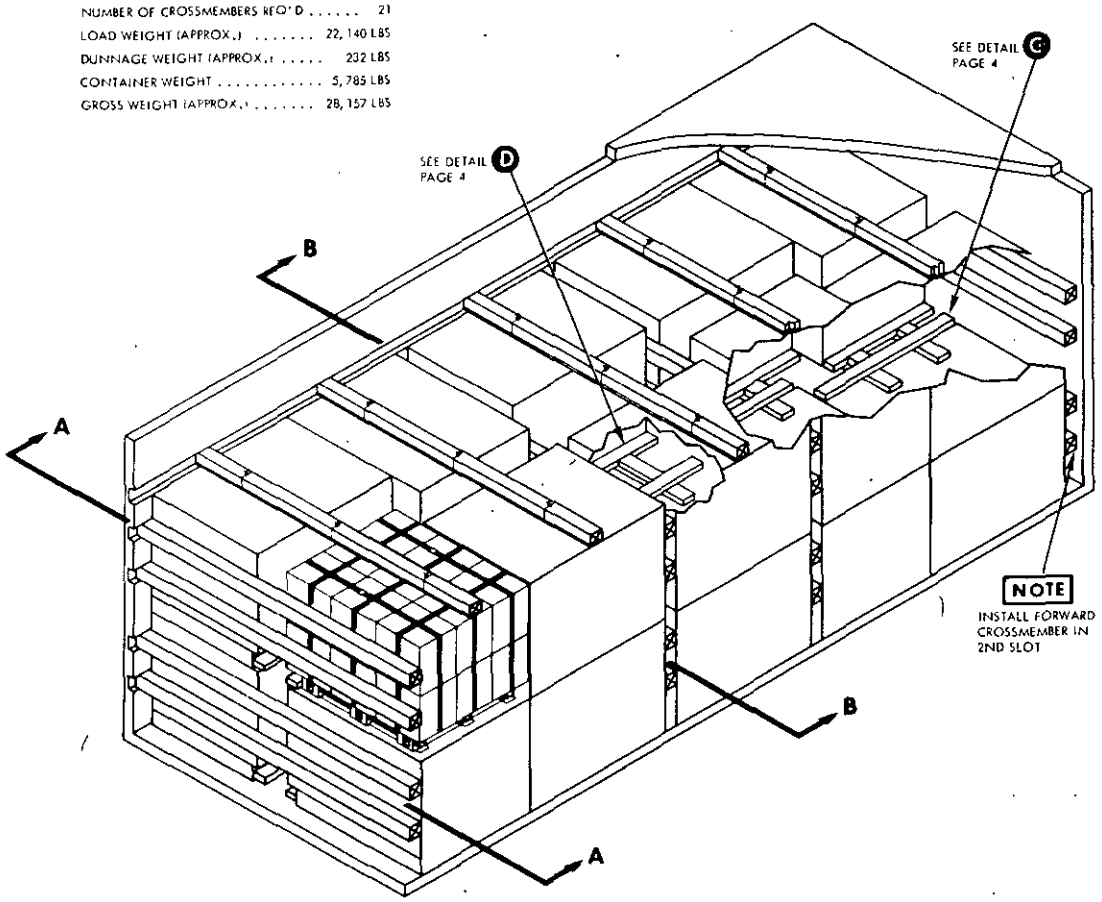

PIECE NO.	DESCRIPTION	SIZE	NO. PCS REQD	NAIL TO	NAILS NUMBER	NAILS SIZE
8	SPACER	2 x 4 TO SUIT	4	6	3	10d
7	STRINGER	2 x 4 x 45 1/2	4	6	3 PER JOINT	10d
6	SUPPORT	2 x 4 x 31	4	SEE 7 & 8	-	-
5	SHIM	4 WIDE x 90 THICKNESS TO SUIT	5	SEE GENERAL NOTE 6		
4	SPACER	2 x 4 TO SUIT	16	1	3	10d
3	STRINGER	2 x 4 x 35	8	1	3 PER JOINT	10d
2	STRINGER	2 x 4 x 45 1/2	8	1	3 PER JOINT	10d
1	SUPPORT	2 x 4 x 24	16	SEE 2, 3 & 4	-	-


LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

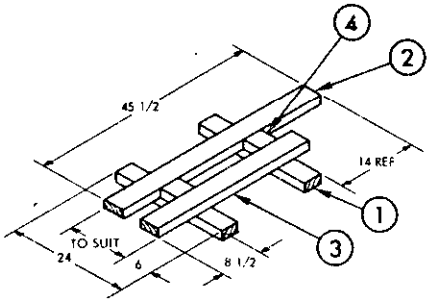


DETAIL C

SWAY BRACE ASSEMBLY
8 REQUIRED

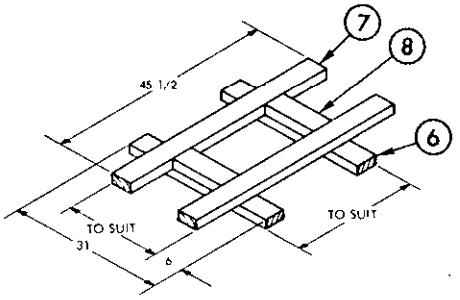


DETAIL D

SWAY BRACE ASSEMBLY
2 REQUIRED

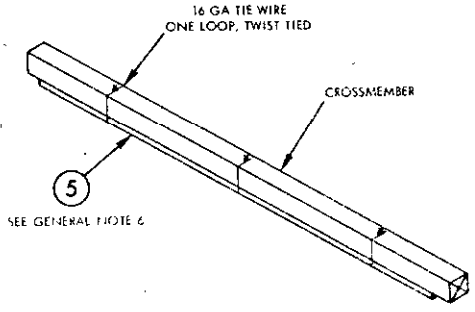

DETAIL E

HOLD DOWN
5 REQUIRED

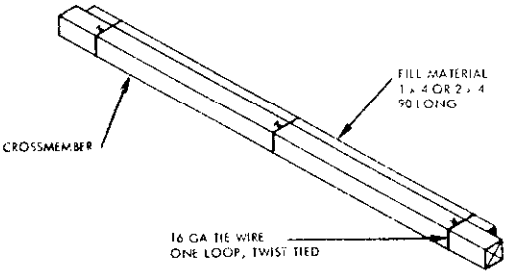

DETAIL F

FILL MATERIAL
SEE GENERAL NOTE 5

REVIEW ACTIVITY:
NAVY - OS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO. B140-N-2371)

☆U.S. GOVERNMENT PRINTING OFFICE: 1974—713-155/6504

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.