MILITARY STANDARD


MIL STD 1386-40
(NAVY)
1 APRIL 1974

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

CARTRIDGE, 50 CALIBER
IN SMALL ARMS AMMUNITION BOX MK 1 MOD 0
DOMESTIC UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-53/28
DIMENSIONS	47 1/2 L x 37 W x 34 7/8 H
CUBE	35.4 CU FT
OTHER	SEE TABLE I
DOT HAZARD CLASSIFICATION	EXPLOSIVES C
CG - CLASS I	

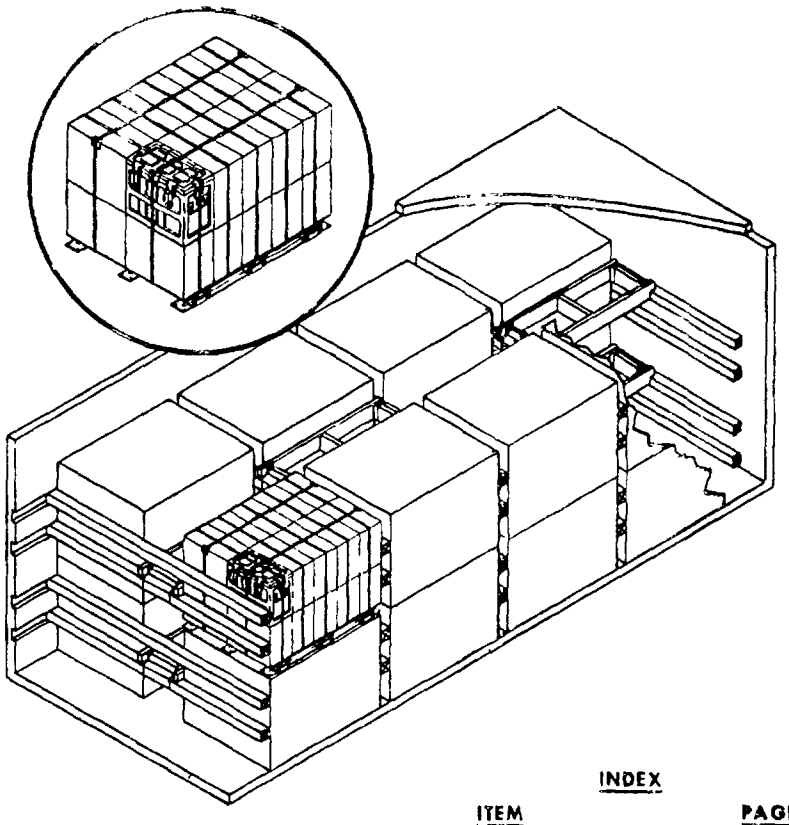

NOTES

1 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

2 FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS REFER TO THE INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

INDEX

ITEM	PAGE
GENERAL NOTES	2
COFC AND CONTAINERSHIP	2 3
DETAILS	4

FSC 8140

AUTHORIZED FOR CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND MOVEMENT ABOARD DEPOT (NON-PUBLIC) ROADS ONLY.

J28 Gray NWHL 3/20/74
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

J E Kelly 3/20/74
SIGNATURE ORD/SYSCOM BY DIRECTION DATE

US COAST GUARD APPROVAL NOT REQUIRED

APPROVED BY BUREAU OF EXPLOSIVES

A F Grasmuck
DATE 3/6/74

ORIGINATOR L R Carney 3/20/74
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH DOMESTIC UNIT LOADS OF .50 CALIBER CARTRIDGES IN SMALL ARMS, AMMUNITION BOX MK 1 MOD 0. THE UNIT LOAD SHALL BE PALLETIZED IN ACCORDANCE WITH WR-53/28.

2 THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C.

3 IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72" AND 83" HEIGHTS FROM THE CONTAINER FLOOR.

4 CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT.

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.

5 WHEN THE VOID BETWEEN THE CROSSMEMBERS AND THE UNIT LOAD IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN THE CROSSMEMBER AND UNIT LOAD AS SHOWN IN DETAIL C, PAGE 4.

6 THE LENGTH OF THE STRUT, PIECE 1, OF SWAY BRACE DETAIL B SHALL BE SUFFICIENT TO CAUSE THE SWAY BRACE TO FILL THE VOID BETWEEN THE UNIT LOADS.

7 SWAY BRACES SHALL BE POSITIONED ON THE 28 AND 60 INCH HIGH CROSSMEMBERS FOR BAYS NO. 1 AND NO. 3 AND ON THE 16 AND 48 INCH HIGH CROSSMEMBERS FOR BAYS NO. 2 AND NO. 4.

NOTE

THERE ARE 4 BAYS IN THIS LOAD AND THEY ARE NUMBERED FROM THE FRONT TO THE REAR OF THE MILVAN.

8 TWIST TIE PIECE 2 OF DETAIL B TO CROSSMEMBERS (FOUR PLACES) WITH 16 GAUGE TIE WIRE.

9 APPLICABLE MATERIAL SPECIFICATIONS

DUNNAGE LUMBER - FED. SPEC. MM-L-751

NAILS - FED. SPEC. FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT

10 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL CONTAINER DOORS. ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF THE CONTAINER FOR THE APPROPRIATE MODE OF TRANSPORTATION AS PRESCRIBED IN OP 2165 (VOL. 1).

COFC AND CONTAINERSHIP ONLY

1 THE CONTAINER LOAD CONSISTS OF 12, 14 OR 16 UNIT LOADS. TO DETERMINE THE NUMBER OF UNIT LOADS TO BE LOADED AND THE PROPER LOAD PATTERN AND LOADING PROCEDURES TO BE USED:

A. DETERMINE THE TYPE OF INNER PACK IN THE MK 1 AMMUNITION BOX AND THE WEIGHT OF THE UNIT LOAD.

B. IN TABLE I, PAGE 4, FIND THE TYPE OF INNER PACKAGE AND THE UNIT LOAD WEIGHT.

C. ON THE SAME LINE OF THE TABLE FIND THE NUMBER OF UNIT LOADS FOR A CONTAINER LOAD AND APPLICABLE LOADING NOTE.

WARNING

BECAUSE THE WEIGHT LOADED INTO THIS CONTAINER EXCEEDS 34,000 LBS., THE MILVAN CHASSIS CANNOT BE USED TO TRANSPORT THE LOADED CONTAINER ON PUBLIC HIGHWAYS. THE LOADED CONTAINER MAY BE TRANSPORTED OVER DEPOT ROADS USING MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES OR COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY.

2 WHEN 16 UNIT LOADS ARE TO BE LOADED INTO THE MILVAN, FOLLOW THE LOAD PLAN SHOWN ON PAGE 3.


3 WHEN 14 UNIT LOADS ARE TO BE LOADED INTO THE MILVAN, FOLLOW THE LOAD PLAN SHOWN ON PAGE 3 OMITTING THE TOP TWO UNIT LOADS OF THE LAST BAY (BAY NO. 4) AND RELATED DUNNAGE.


4 WHEN 12 UNIT LOADS ARE TO BE LOADED INTO THE MILVAN, FOLLOW THE LOAD PLAN SHOWN ON PAGE 3 OMITTING THE TOP TWO UNIT LOADS OF THE SECOND AND THIRD BAYS AND RELATED DUNNAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	SEE TABLE I
NUMBER OF CROSSMEMBERS REQD	20
CONTAINER WEIGHT	5 785
WEIGHT	SEE TABLE I

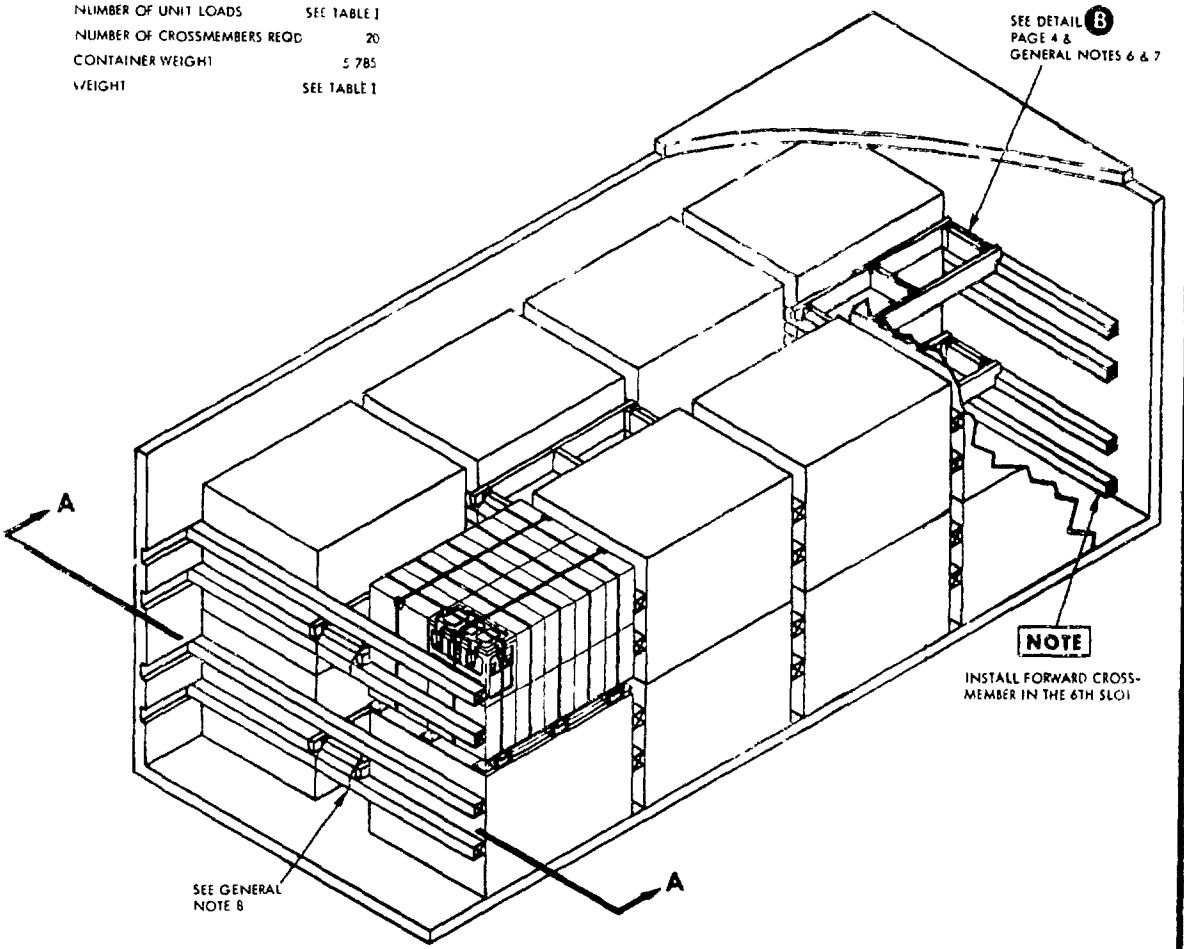

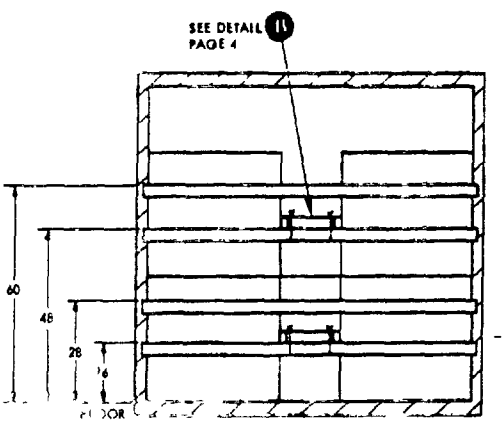


SECTION A-A

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NAILS NUMBER	NAILS SIZE
2	STRINGER	2 x 6 x 52 1/2	16	1	3 PER JOINT	16d
1	STRUT	2 x 6 x TO SUIT	24	SEE 2	-	-

LIST OF MATERIALS AND NAILING DATA

.50 CALIBER (LINKED IN MK 21 CAN)
COFC & CONTAINERSHIP


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

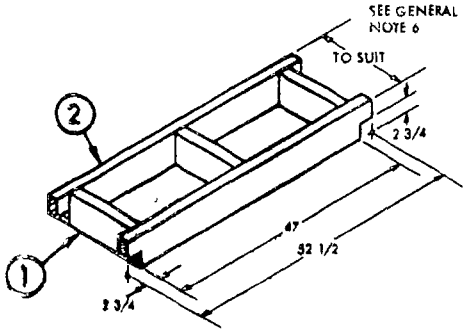

DETAIL B

SWAY BRACE

8 REQUIRED FOR 16 UNIT LOADS
7 REQUIRED FOR 14 UNIT LOADS
6 REQUIRED FOR 12 UNIT LOADS

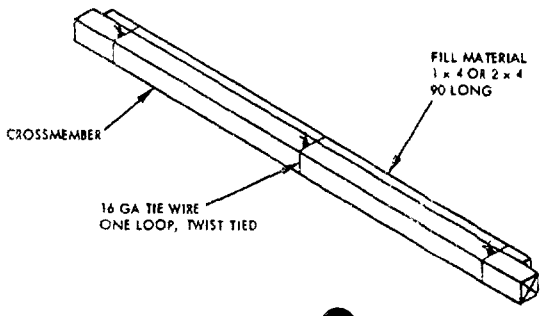

DETAIL C

FILL MATERIAL
SEE NOTE 5

TABLE I

TYPE OF INNER PACKAGE	UNIT LOAD WEIGHT (LBS)	NO OF UNIT LOADS PER CONTAINER	APPLICABLE LOADING NOTE	CONTAINER LOAD WEIGHT (LBS)	DUNNAGE WEIGHT (LBS)	CONTAINER GROSS WEIGHT (LBS)
LINKED IN M21 CAN	2310	16	COFC NOTE 2 PAGE 2	36 960	248	42 993
LINKED IN M10 CAN	2730	14	COFC NOTE 3 PAGE 2	38 220	218	44 223
10 ROUNDS PER CARTON 6 CARTONS IN M10 CAN	2730	14	COFC NOTE 3 PAGE 2	28 220	216	44,223
BULK IN M21 CAN	2710	14	COFC NOTE 3 PAGE 2	37 940	218	43 940
LINK BELT	3110	12	COFC NOTE 4 PAGE	37,320	188	43 29..

REVIEW ACTIVITY
NAVY - OS

PREPARING ACTIVITY
NAVY - OS
PROJECT NO 8140-N225

☆ U S GOVERNMENT PRINTING OFFICE: 1977 703-020/618

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.