MILITARY STANDARD

MIL-STD-1386 (NAVY)


15 MAY 1974

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

50 CALIBER LINKED AMMUNITION IN AMMUNITION BOX MK 1 MOD 0 AMPHIBIOUS UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-55/154
WEIGHT (APPROXIMATE)	1605 LBS
DIMENSIONS	48 1/4 L x 40 5/8 W x 20 1/2 H
CUBE	23.3 CU FT
DOT HAZARD CLASSIFICATION	EXPLOSIVES C
COAST GUARD CLASS	1

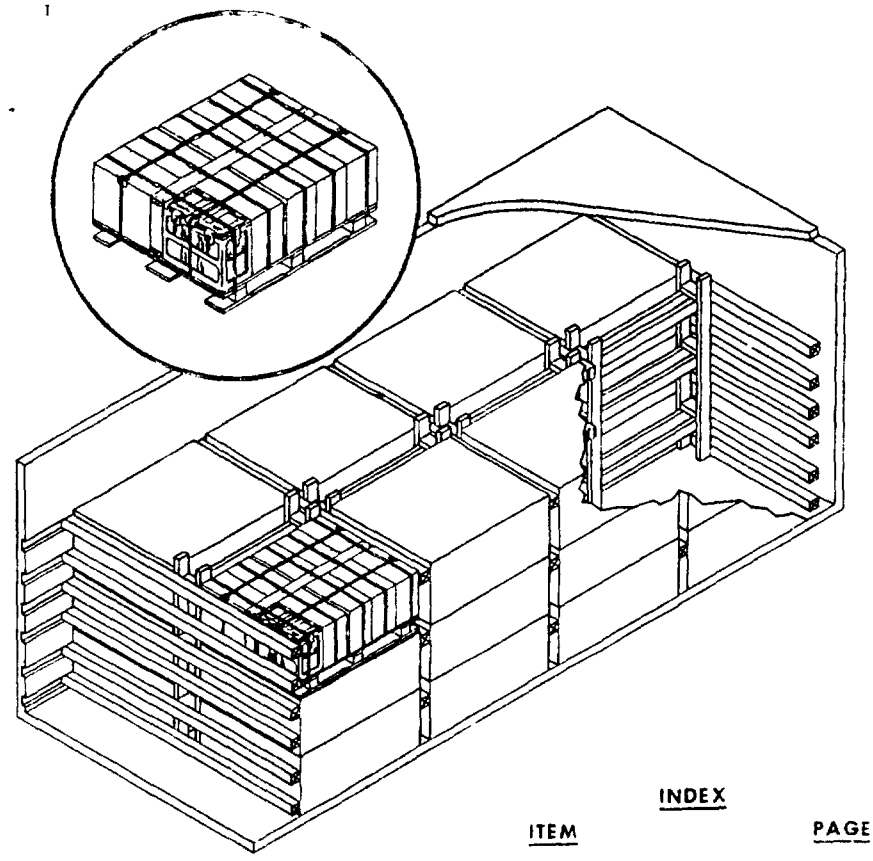

INDEX

ITEM	PAGE
GENERAL NOTES	2
COFC AND CONTAINERSHIP	2 3

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING TRUCKLOADING AND CARLOADING MILITARY STANDARDS REFER TO THE INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

FSC 8140

AUTHORIZED FOR CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND MOVEMENT ABOARD DEPOT (NON-PUBLIC) ROADS ONLY

SIGNATURE — TECHNICAL DIRECTION AGENT (TDA) — DATE 5/13/74

SIGNATURE — ORD SYSCOM BY DIRECTION — DATE

APPROVED BY BUREAU OF EXPLOSIVES

DATE 4/3/74

ORIGINATOR — SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH AMPHIBIOUS UNIT LOADS OF .50 CALIBER LINKED AMMUNITION IN THE SMALL ARMS AMMUNITION BOX MK 1 MOD 0. THE UNIT LOAD SHALL BE IN ACCORDANCE WITH WR-55/154.

2 THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C.

3 IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR.

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.

4 CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT.

5 CUT SPREADER PIECE 2, OF FILLER ASSEMBLY AS SHOWN IN DETAIL B, OF SUFFICIENT LENGTH TO FILL VOID BETWEEN UNIT LOADS.

6 WHEN THE LONGITUDINAL SLACK BETWEEN A CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND UNIT LOAD AS SHOWN IN DETAIL C.

7 APPLICABLE MATERIAL SPECIFICATIONS

DUNNAGE LUMBER - FED SPEC MM-L 751

NAILS - FED SPEC FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT

8 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA AND CLOSE AND SEAL CONTAINER DOORS.


COFC AND CONTAINERSHIP ONLY

1 THE CONTAINER LOAD CONSISTS OF 24 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT.


WARNING

BECAUSE THE WEIGHT LOADED INTO THIS CONTAINER EXCEEDS 34 000 LBS., THE MILVAN CHASSIS CANNOT BE USED TO TRANSPORT THE LOADED CONTAINER ON PUBLIC HIGHWAYS. THE LOADED CONTAINER MAY BE TRANSPORTED OVER DEPOT ROADS USING MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES OR COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY.

2 WHEN SHIPPING THE LOADED MILVAN CONTAINER COFC, THE RAILCAR SHALL MEET THE REQUIREMENTS OF BUREAU OF EXPLOSIVES PAMPHLET 6C.

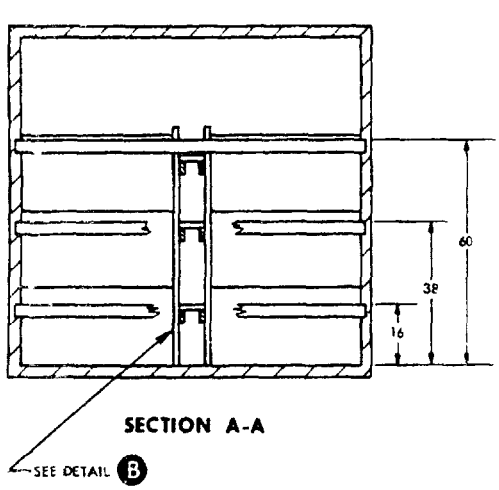


SECTION A-A

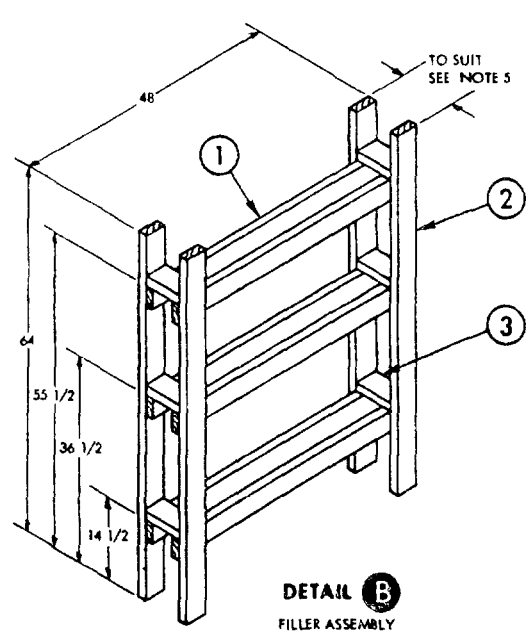


DETAIL B
FILLER ASSEMBLY
4 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.

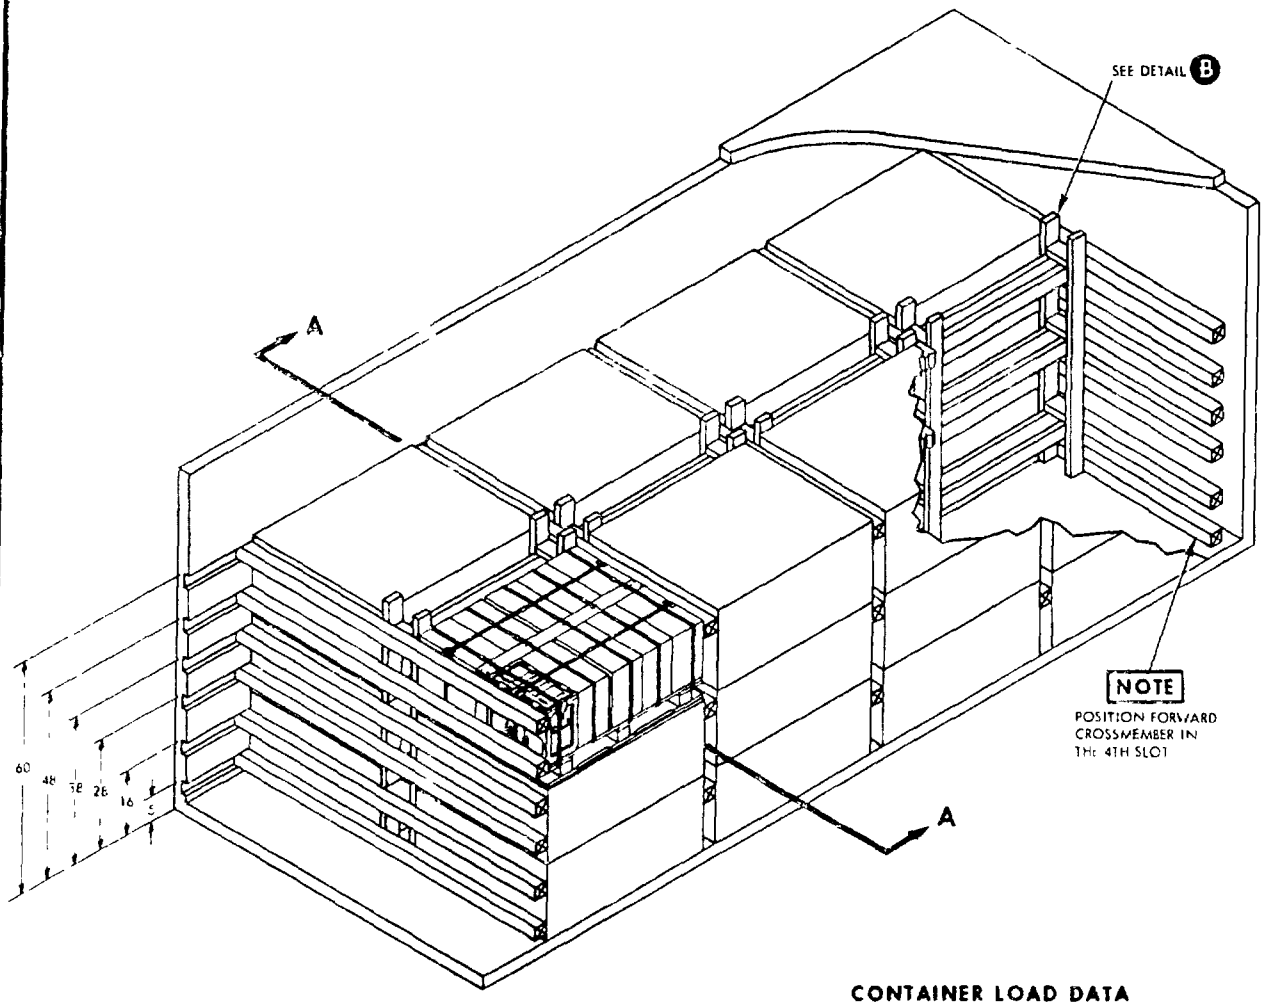

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	24
NUMBER OF CROSSMEMBERS	21
LOAD WEIGHT (APPROXIMATE)	38 520 LBS
DUNNAGE WEIGHT (APPROXIMATE)	323 LBS
CONTAINER WEIGHT	5 785 LBS
GROSS WEIGHT (APPROXIMATE)	44 628 LBS

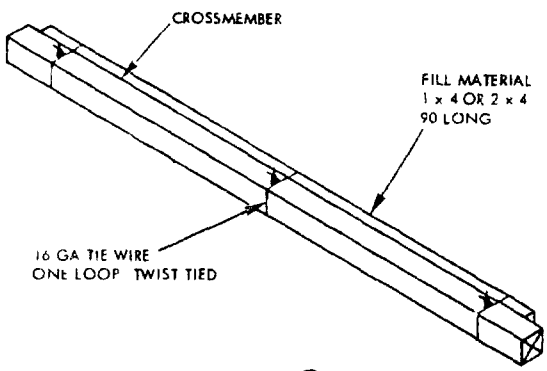

DETAIL C

FILL MATERIAL
SEE NOTE 6

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NAILS: NUMBER	NAILS: SIZE
3	SPREADER	2 x 4 TO SUIT	24	1	2 PER JOINT	10d
2	VERTICAL	2 x 4 x 64	16	SEE 1	-	-
1	HORIZONTAL	2 x 4 x 48	24	2	3 PER JOINT	10d

LIST OF MATERIALS AND NAILING DATA

COFC & CONTAINERSHIP

REVIEW ACTIVITY
NAVY - OS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO 8140-N219)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:13Z
Check the source to verify that this is the current version before use.