MILITARY STANDARD


MIL-STD-1386 A
(Navy)
11 MAY 77

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

BOMB, GENERAL PURPOSE, MK 82 & MOD5 (500 LBS) FLEET ISSUE UNIT LOAD (WITH PLASTIC NOSE PLUGS)

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54/31
WEIGHT	3138 LBS
DIMENSIONS	61 7/8 L x 33 3/4 W x 27 H
CUBE	32 5 CU FT
DOT HAZARD CLASSIFICATION	EXPLOSIVES A
COAST GUARD CLASS	I A

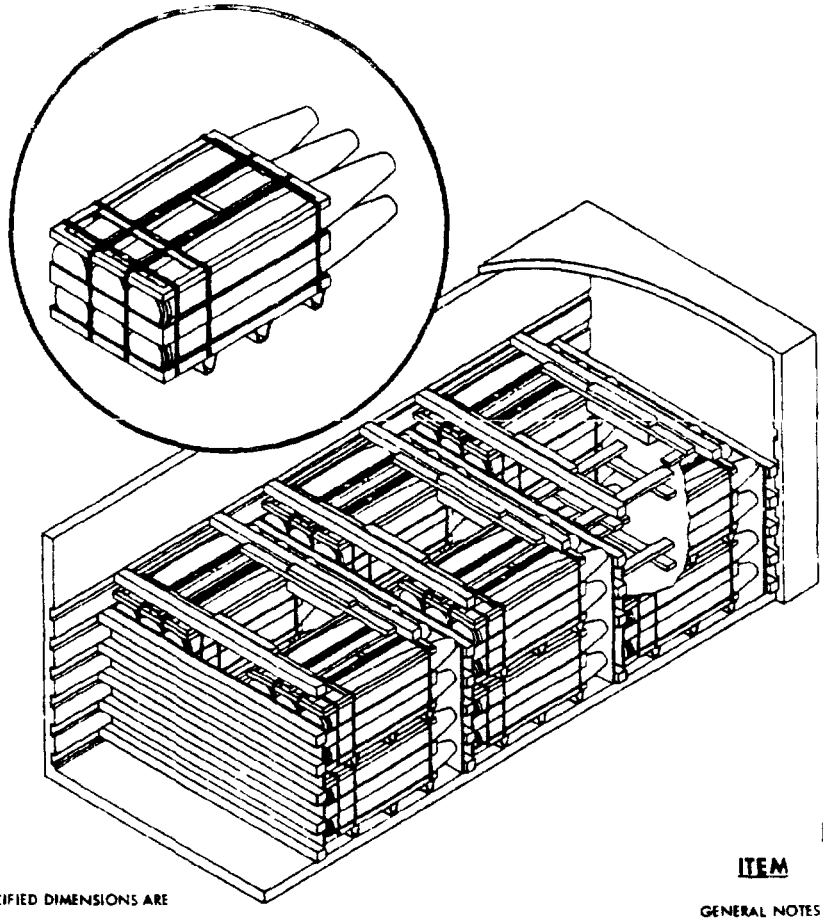

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING TRUCKLOADING AND CARLOADING MILITARY STANDARDS REFER TO COMPREHENSIVE INDEX (NWHL NO 4200

INDEX

ITEM	PAGE
GENERAL NOTES	2
COFC AND CONTAINERSHIP	2 3 & 4

AUTHORIZED FOR CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND MOVEMENT ABOARD DEPOT (NON-PUBLIC) ROADS ONLY.

M.S. Evans NWHL 7/27/72
SIGNATURE OF NAVAL DIRECTING AGENT (TDA) DATE

SIGNATURE (AIR) SYSCOM BY DIRECTION 7/24/72
DATE

APPROVED BY US COAST GUARD

W.J. Schuring CAPT USCG
DATE 7-12-72

APPROVED BY BUREAU OF EXPLOSIVES

A. F. Brannock
DATE 7/24/72

ORIGINATOR E. R. Carrier
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF 500 LB MK 84 LOW DRAG BOMBS. THE UNIT LOAD SHALL BE IN ACCORDANCE WITH WR-54 3.
2. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C AND SHIPPED ON FLAT CARS THAT MEET THE REQUIREMENTS OF PAMPHLET 6C.
3. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 80 INCH HEIGHTS FROM THE CONTAINER FLOOR.

CAUTION

WHEN POSITIONING CROSSMEMBERS, MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.

4. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT.
5. THE DUNNAGE SPECIFIED IS OF NOMINAL SIZES. FOR EXAMPLE, 1 x 4 MATERIAL IS ACTUALLY 0.4 INCH THICK BY 3.8 INCHES WIDE AND 2 x 6 MATERIAL IS ACTUALLY 1.6 INCHES THICK BY 5.2 INCHES WIDE.
6. DUE TO THE HEIGHT OF THE CONTAINER FLOOR ABOVE THE GROUND WHEN THE CONTAINER IS ON THE MILVAN CHASSIS (APPROXIMATELY 60 3/4 IN.) THE STANDARD LOADING DOCK IS TOO LOW TO USE. A LOADING PLATFORM (APPROXIMATELY 10 x 16 FT.) SHALL BE USED TO RAISE THE DOCK LEVEL. A SUITABLE FORK LIFT TRUCK IS KEPT ON THIS PLATFORM TO LOAD FROM THE PLATFORM INTO THE CONTAINER.
7. THE UNIT LOADS ARE HANDLED FROM THE STORAGE AREA TO THE LOADING PLATFORM (SEE NOTE 6) BY A SUITABLE FORK LIFT TRUCK LIFTING FROM THE SIDE OF THE LOAD. THE UNIT LOAD IS PLACED ON THE TINES OF THE FORK LIFT TRUCK ON THE LOADING PLATFORM WITH THE BASE END AGAINST THE MAST. LOADING THE CONTAINER PROCEEDS AS FOLLOWS:
   - A. WITH THE UNIT LOAD CARRIED APPROXIMATELY SIX INCHES FROM THE FLOOR AND TILTED BACK, MOVE THE UNIT LOAD INTO THE CONTAINER TO THE DESIRED LOCATION.
   - B. LOWER THE UNIT LOAD WITH A 4 x 4 x 18 INCH PIECE UNDER AND 90 DEGREES TO THE BASE LATERAL SKID.
   - C. WITHDRAW THE TINES, THEN RAISE THE UNIT LOAD FROM THE BASE END SUFFICIENT TO REMOVE THE 4 x 4 PIECE AND LOWER TO POSITION.

   WHEN UNLOADING THE CONTAINER THE PROCEDURE IS REVERSED.
8. SWAY BRACE DETAIL C IS ASSEMBLED IN PLACE. PIECE 2 IS POSITIONED INBOARD OF THE BASE END AND NOSE END PALLET SKIDS WITH PIECES 3 AGAINST PALLET SKIDS. NAIL TO PIECE 2 WITH THREE 10d NAILS PER JOINT. CUT PIECE 4 TO FIT BETWEEN PIECES 3 AND NAIL TO PIECE 2 WITH THREE 10d NAILS.
9. WHEN THE VOID BETWEEN THE CROSSMEMBER AND THE PLYWOOD SEPARATOR IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBERS AND PLYWOOD AS SHOWN IN DETAIL E.
10. SHIM, PIECE 7, IS THICKNESS TO SUIT AND MAY BE ADDED TO OR OMITTED AS REQUIRED TO SECURE LADING.
11. SPACER, PIECE 8, SHALL FILL VOID BETWEEN UNIT LOADS.
12. APPLICABLE MATERIAL SPECIFICATIONS:
    DUNNAGE LUMBER - FED. SPEC. MM-L-751, PLYWOOD, COMMERCIAL STANDARD, CS-45, GRADE INTERIOR C-D
    NAILS - FED. SPEC. FF-N-105, COMMON CEMENT COATED
13. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA, CLOSE AND SEAL CONTAINER DOORS, AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF THE CONTAINER FOR THE APPROPRIATE MODE OF TRANSPORTATION AS PRESCRIBED IN OP 2165 (VOL. 1).

COFC AND CONTAINERSHIP


1. THE CONTAINER LOAD CONSISTS OF 12 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT.

WARNING

BECAUSE THE WEIGHT LOADED INTO THIS CONTAINER EXCEEDS 34,000 LBS. THE MILVAN CHASSIS CANNOT BE USED TO TRANSPORT THE LOADED CONTAINER ON PUBLIC HIGHWAYS. THE LOADED CONTAINER MAY BE TRANSPORTED OVER DEPOT ROADS USING A MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES OR COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY.


2. A SEPARATOR GATE OF DIMENSIONAL LUMBER MAY BE USED AS AN ALTERNATE FOR THE PLYWOOD SEPARATOR, PIECE 1. SEE DETAIL F, PAGE 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

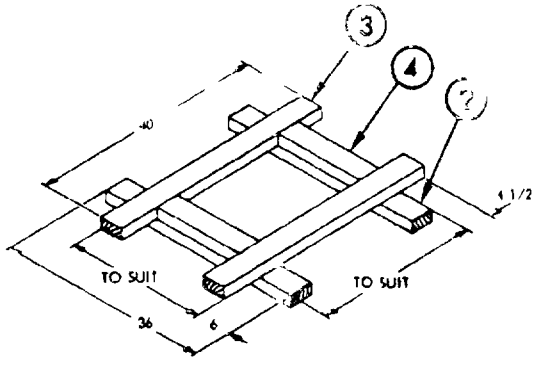

DETAIL C


SWAY BRACE 6 REQUIRED
TO BE ASSEMBLED IN PLACE
SEE NOTE 8

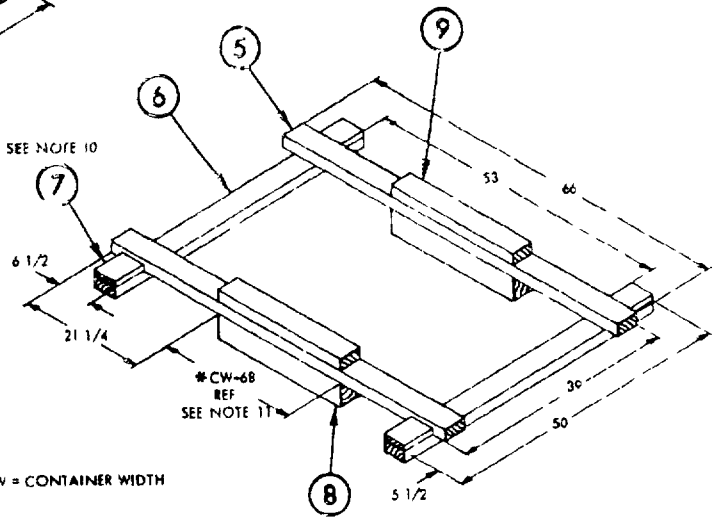

*CW = CONTAINER WIDTH


DETAIL D

HOLD DOWN 3 REQUIRED

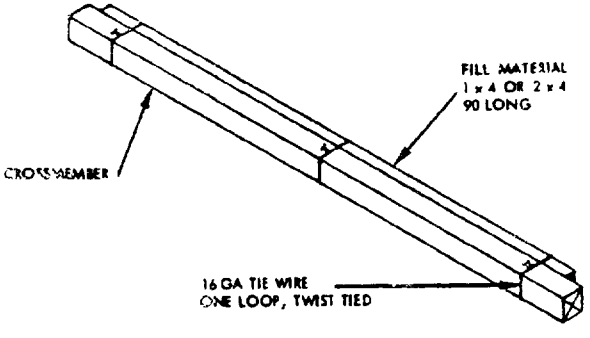

DETAIL E

FILL MATERIAL
SEE NOTE 9, PAGE 2

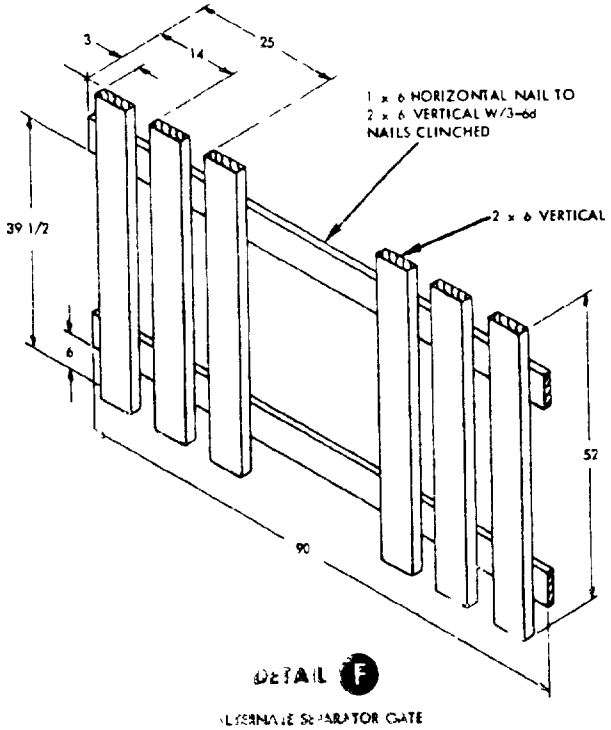


DETAIL F

ALTERNATE SEPARATOR GATE

* A [illegible] GATE OF DIMENSIONAL LUMBER MAY BE USED AS AN ALTERNATE FOR THE PLYWOOD SEPARATOR PIECE 1


[illegible] GATE WITH 2 [illegible] 1-YARD UNIT LOAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

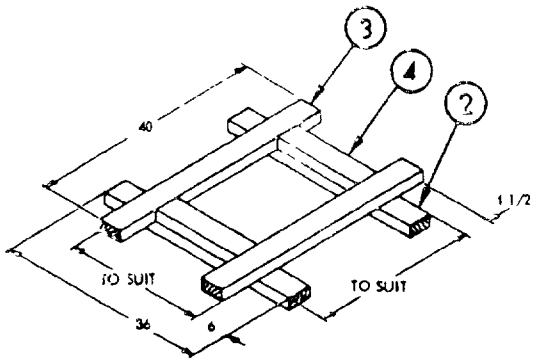

DETAIL C


SWAY BRACE 6 REQUIRED
TO BE ASSEMBLED IN PLACE
SEE NOTE 8

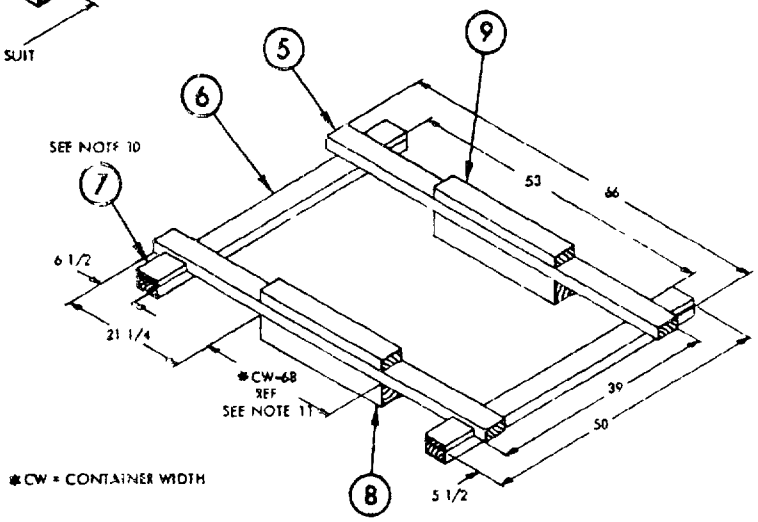

*CW = CONTAINER WIDTH


DETAIL D

HOLD DOWN 3 REQUIRED

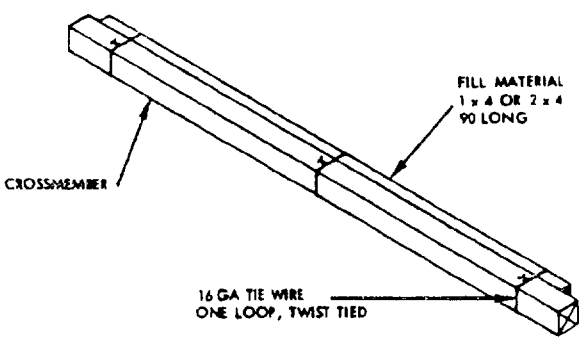

DETAIL E

FILL MATERIAL
SEE NOTE 9 PAGE 2

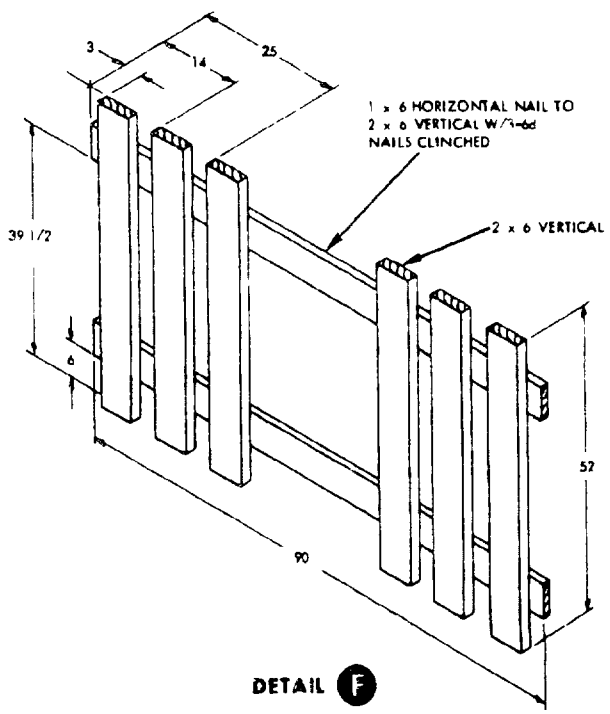

DETAIL F

ALTERNATE SEPARATOR GATE

A SEPARATOR GATE OF DIMENSIONAL LUMBER MAY BE USED AS AN ALTERNATE FOR THE PLYWOOD SEPARATOR PIECE 1

POSITION GATE WITH 2 x 6 VERTICAL TOWARD UNIT LOAD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.