MIL STD 1135 5
(Navy)

11 MAY 1972

MILITARY STANDARD

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

ADAPTER, BOOSTER, NOSE T45 TYPE
FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR 54766
WEIGHT	2876 LBS
DIMENSIONS	56 L x 43 7/8 W x 42 1/4 H
CUBE	55 9 CU FT
DOT HAZARD CLASSIFICATION	EXPLOSIVES A
COAST GUARD CLASS	X-A

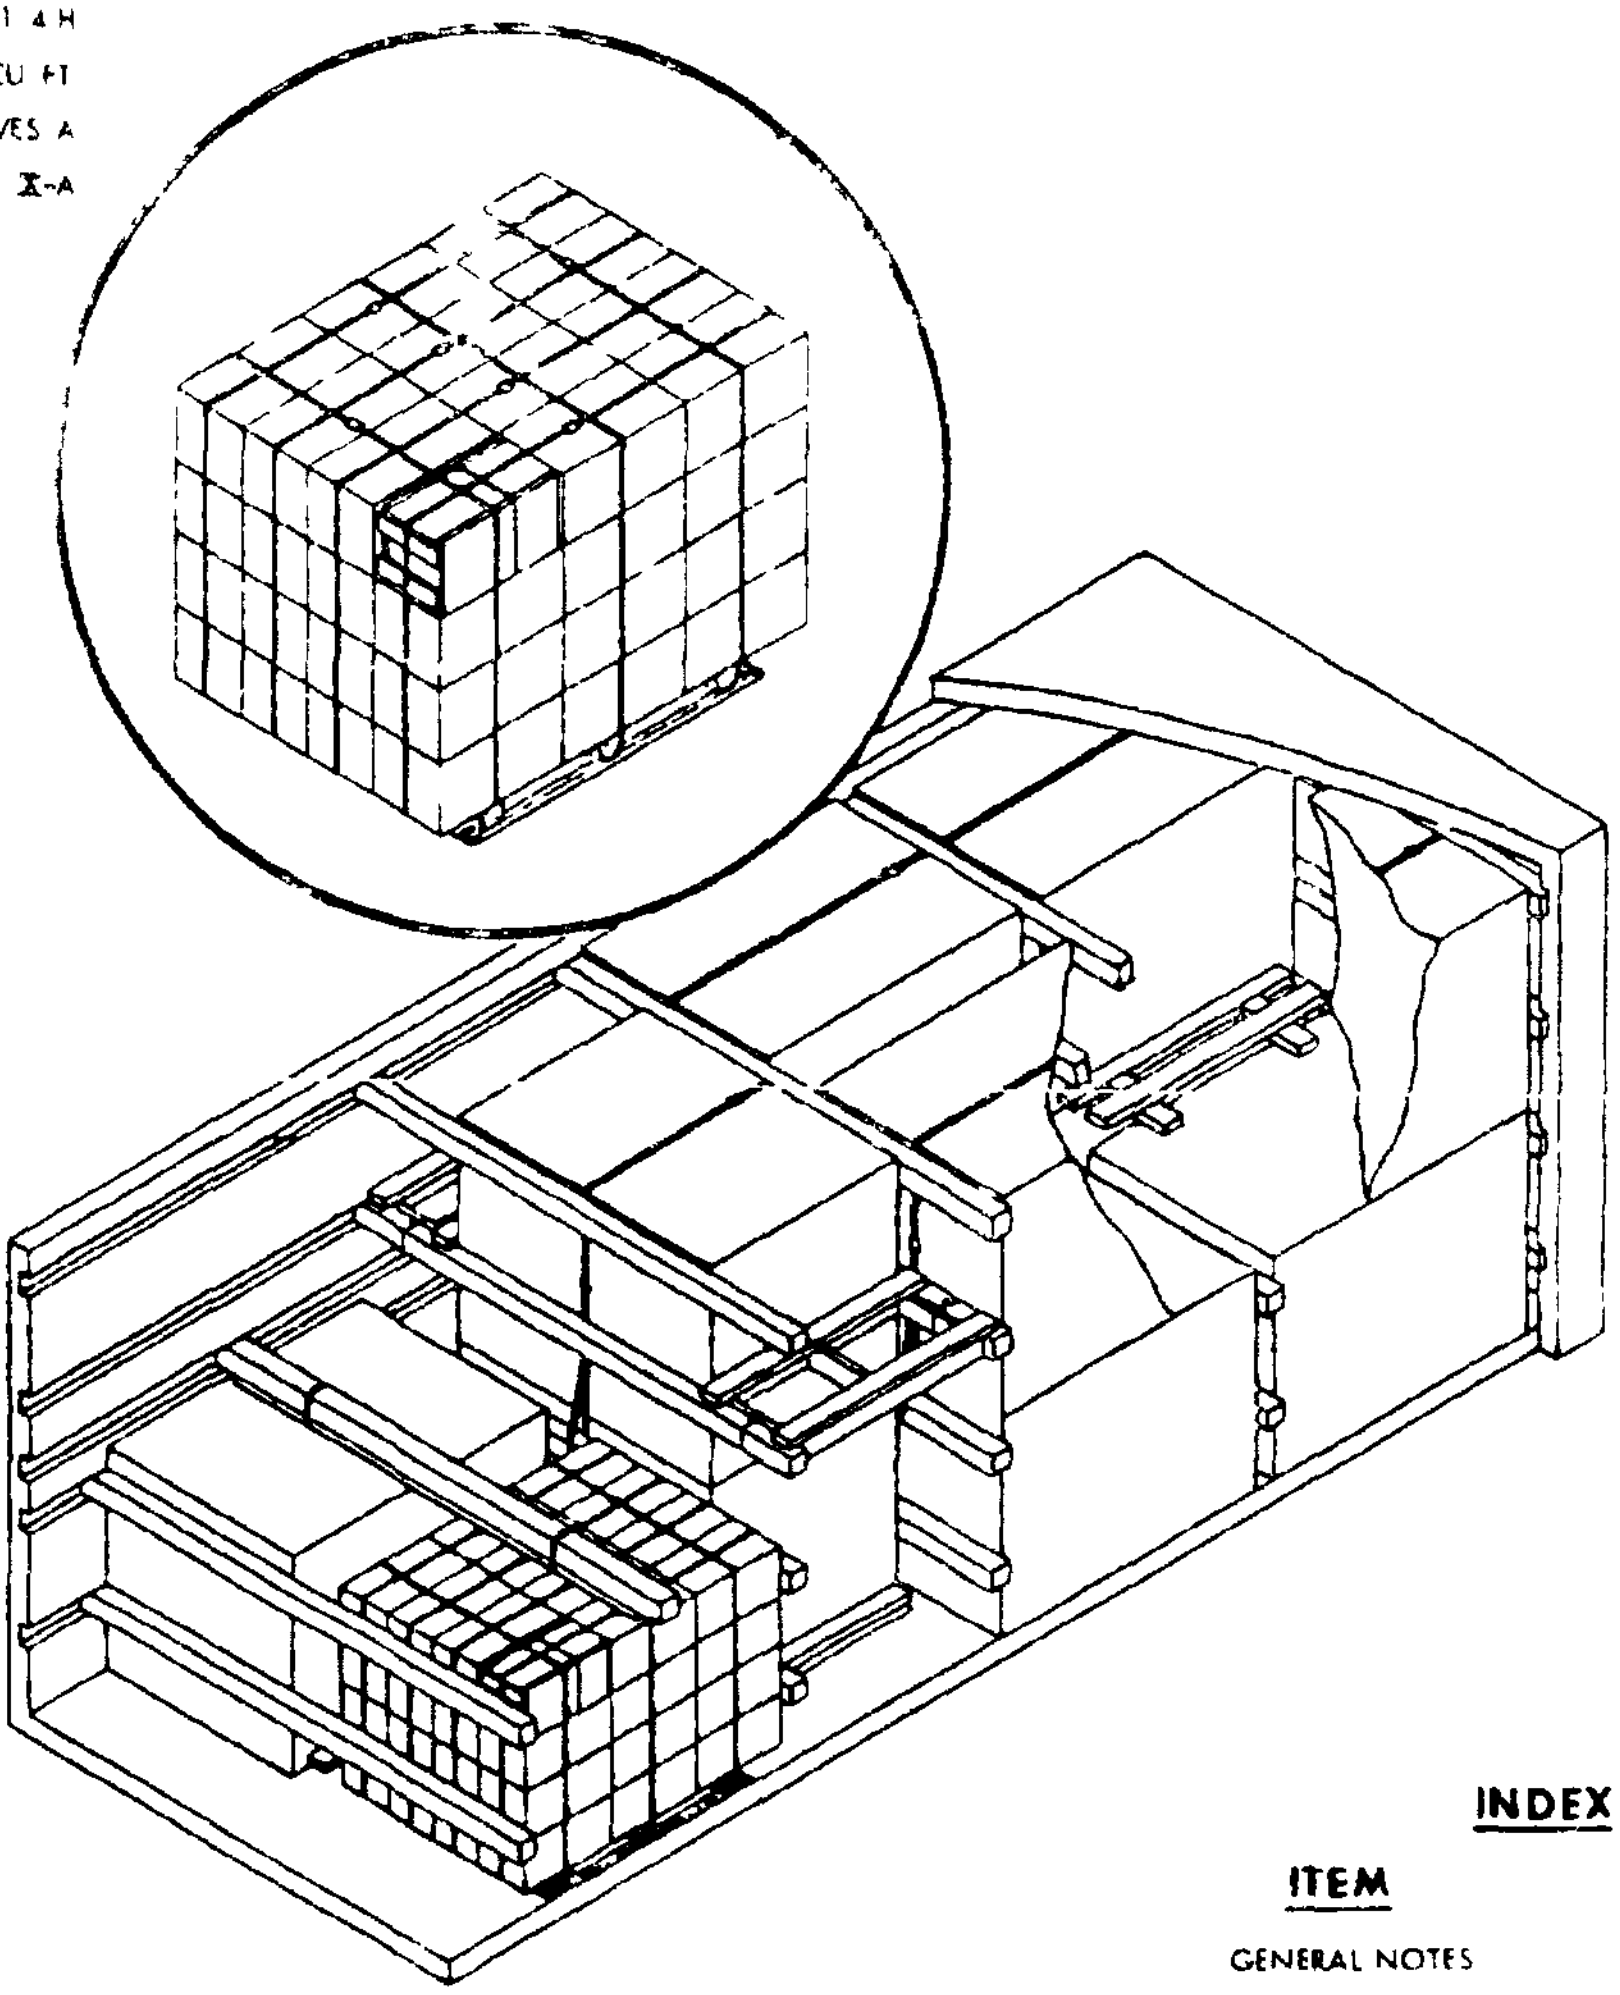

INDEX

ITEM	PAGE
GENERAL NOTES	2
COFC & CONTAINERSHIP	2 3 & 4

NOTES
1 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2 FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCK-LOADING AND CARLOADING MILITARY STANDARDS, REFER TO COMPREHENSIVE INDEX NWHL NC 4200

AUTHORIZED FOR CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND MOVEMENT ABOARD DEPOT (NON-PUBLIC) ROADS ONLY

NAVAIR 7/21/72
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

7/21/72
SIGNATURE (AIR) SYSCOM BY DIRECTION DATE

APPROVED BY US COAST GUARD

Schurig CAPT USCG

DATE 7-12-72

APPROVED BY BUREAU OF EXPLOSIVES

DATE 7/27/72

ORIGINATOR

SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF T45 TYPE NOSE BOOSTER ADAPTERS THE UNIT LOAD SHALL BE IN ACCORDANCE WITH WR 54/66

2 THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C AND SHIPPED ON FLAT CARS THAT MEET THE REQUIREMENTS OF PAMPHLET 6C

3 IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR

4 CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT

CAUTION

WHEN POSITIONING CROSSMEMBERS, MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE

5 THE DUNNAGE SPECIFIED IS OF NOMINAL SIZE FOR EXAMPLE, 1 x 4 MATERIAL IS ACTUALLY 3/4 THICK BY 3 5/8 WIDE AND 2 x 6 MATERIAL IS ACTUALLY 1 5/8 THICK BY 5 1/2 WIDE

6 WHEN THE VOID BETWEEN THE CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND LOAD AS SHOWN IN DETAIL E

7 APPLICABLE MATERIAL SPECIFICATIONS DUNNAGE LUMBER - FED SPEC MM-L-751, NAILS - FED SPEC FF-N-105, COMMON CEMENT COATED STRAPPING - FED SPEC QQ-S-781, TYPE 1 CLASS A

8 EACH BAY OF ADAPTERS IS TOMMED DOWN WITH TWO 1 1/4 035 STEEL STRAPS THE STRAPS ARE ATTACHED TO THE CROSSMEMBERS AS SHOWN IN DETAIL A LOCATE SEALS WITH A CROSSMEMBER BETWEEN THE SEAL AND THE STRAP ENCIRCLED CROSSMEMBER AS SHOWN IN THE BUBBLE OF THE STRAPPING DIAGRAM DETAIL A SECURE EACH END OF THE STRAP WITH ONE SEAL WITH TWO PAIR OF NOTCHES PER SEAL OR TWO SEALS, BUTTED TOGETHER WITH TWO PAIR OF CRIMPS PER SEAL

9 SWAY BRACE DETAIL D IS ASSEMBLED IN PLACE PIECE 3 IS POSITIONED INBOARD OF THE OUTER LEGS OF THE PALLET SKIDS WITH PIECES 4 AGAINST PALLET LEGS, NAIL TO PIECE 3 WITH THREE 10d NAILS PER JOINT CUT PIECE 5 TO FIT BETWEEN PIECES 4 AND NAIL TO PIECE 3 WITH THREE 10d NAILS

10 LENGTH OF STRUT PIECE 9, SHALL BE SUFFICIENT TO CAUSE DETAIL C TO FILL THE VOID BETWEEN THE UNIT LOAD AND THE CONTAINER SIDE WALL TWIST TIE BOTH ENDS OF DETAIL C TO CROSSMEMBER WITH 16 GAUGE SOFT ANNEALED WIRE

11 SHIM, PIECE 11 SHALL BE OF SUFFICIENT THICKNESS TO FILL THE VOID BETWEEN THE TOP OF THE UNIT LOAD AND THE BOTTOM OF THE CROSSMEMBER

12 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA, CLOSE AND SEAL CONTAINER DOORS, AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF THE CONTAINER FOR THE APPROPRIATE MODE OF TRANSPORTATION AS PRESCRIBED IN OP 2165 (VOL 1)

COFC AND CONTAINERSHIP

WARNING

BECAUSE THE WEIGHT LOADED INTO THIS CONTAINER EXCEEDS 34 000 LBS THE MILVAN CHASSIS CANNOT BE USED TO TRANSPORT THE LOADED CONTAINER ON PUBLIC HIGHWAYS THE LOADED CONTAINER MAY BE TRANSPORTED OVER DEPOT ROADS USING A MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES OR COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY

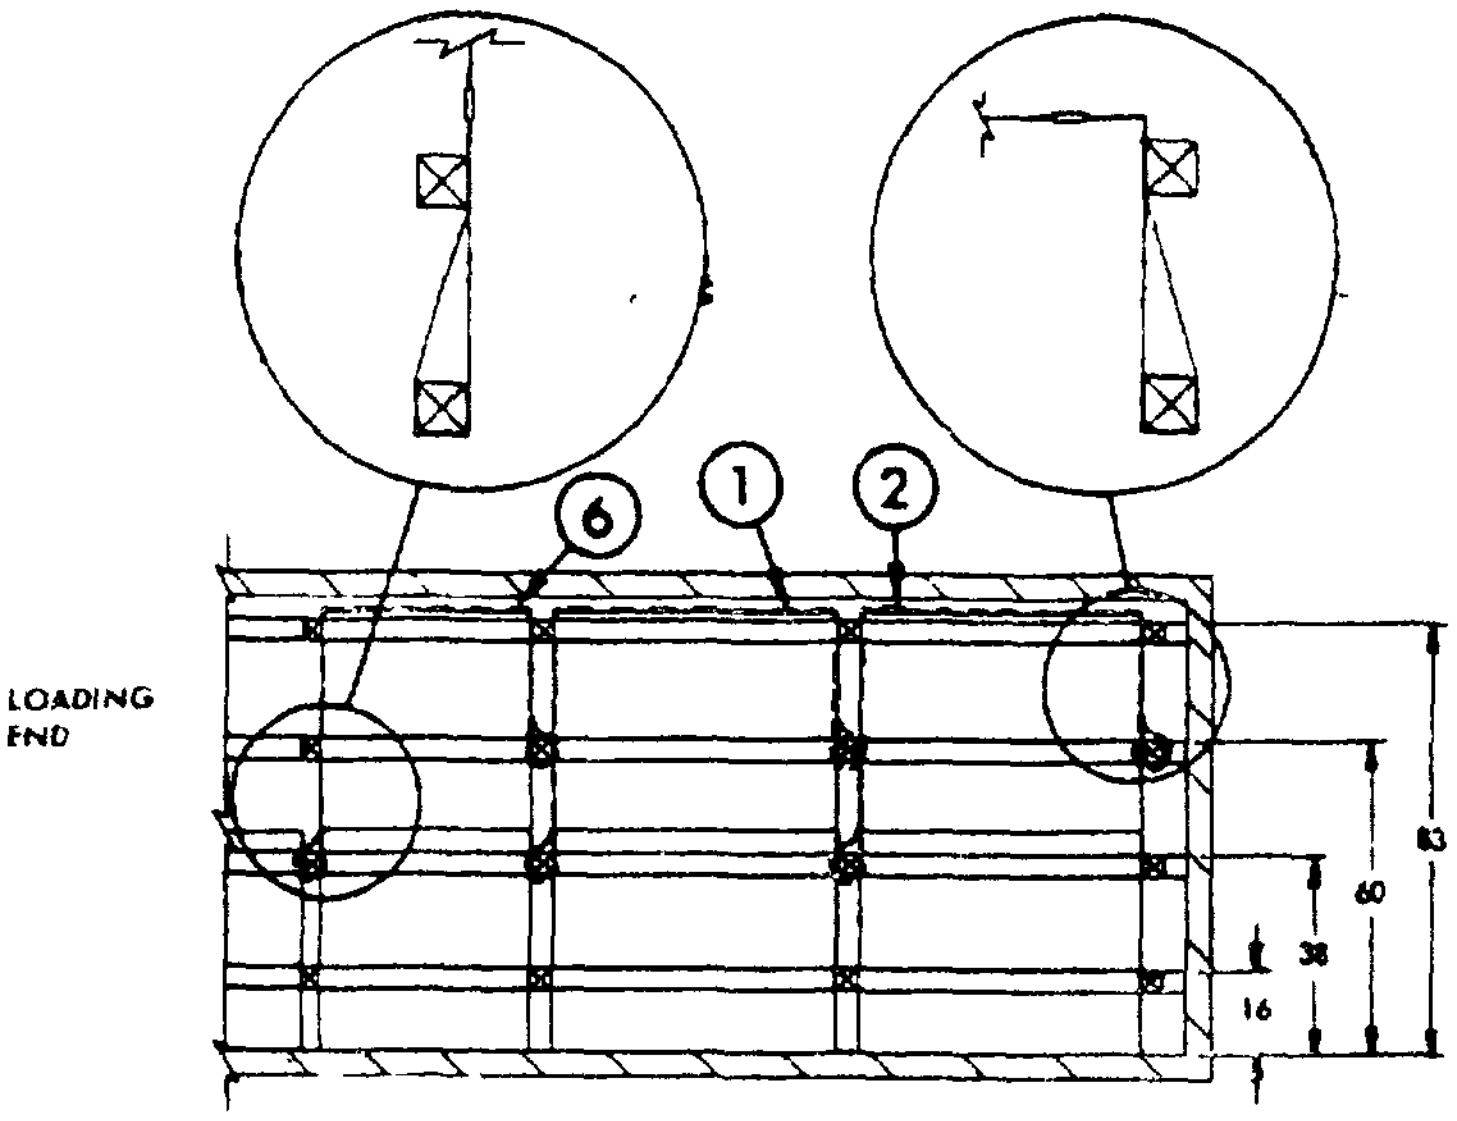

DETAIL Ⓐ

STRAPPING DIAGRAM
INDICATES ATTACHMENT POINTS
FOR HOLD-DOWN STRAPPING

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	1
NUMBER OF CROSSMEMBERS REQD	1
LOAD WEIGHT	34 536 LBS
DUNNAGE WEIGHT	231 LBS
CONTAINER WEIGHT	5 785 LBS
GROSS WEIGHT	40 552 LBS

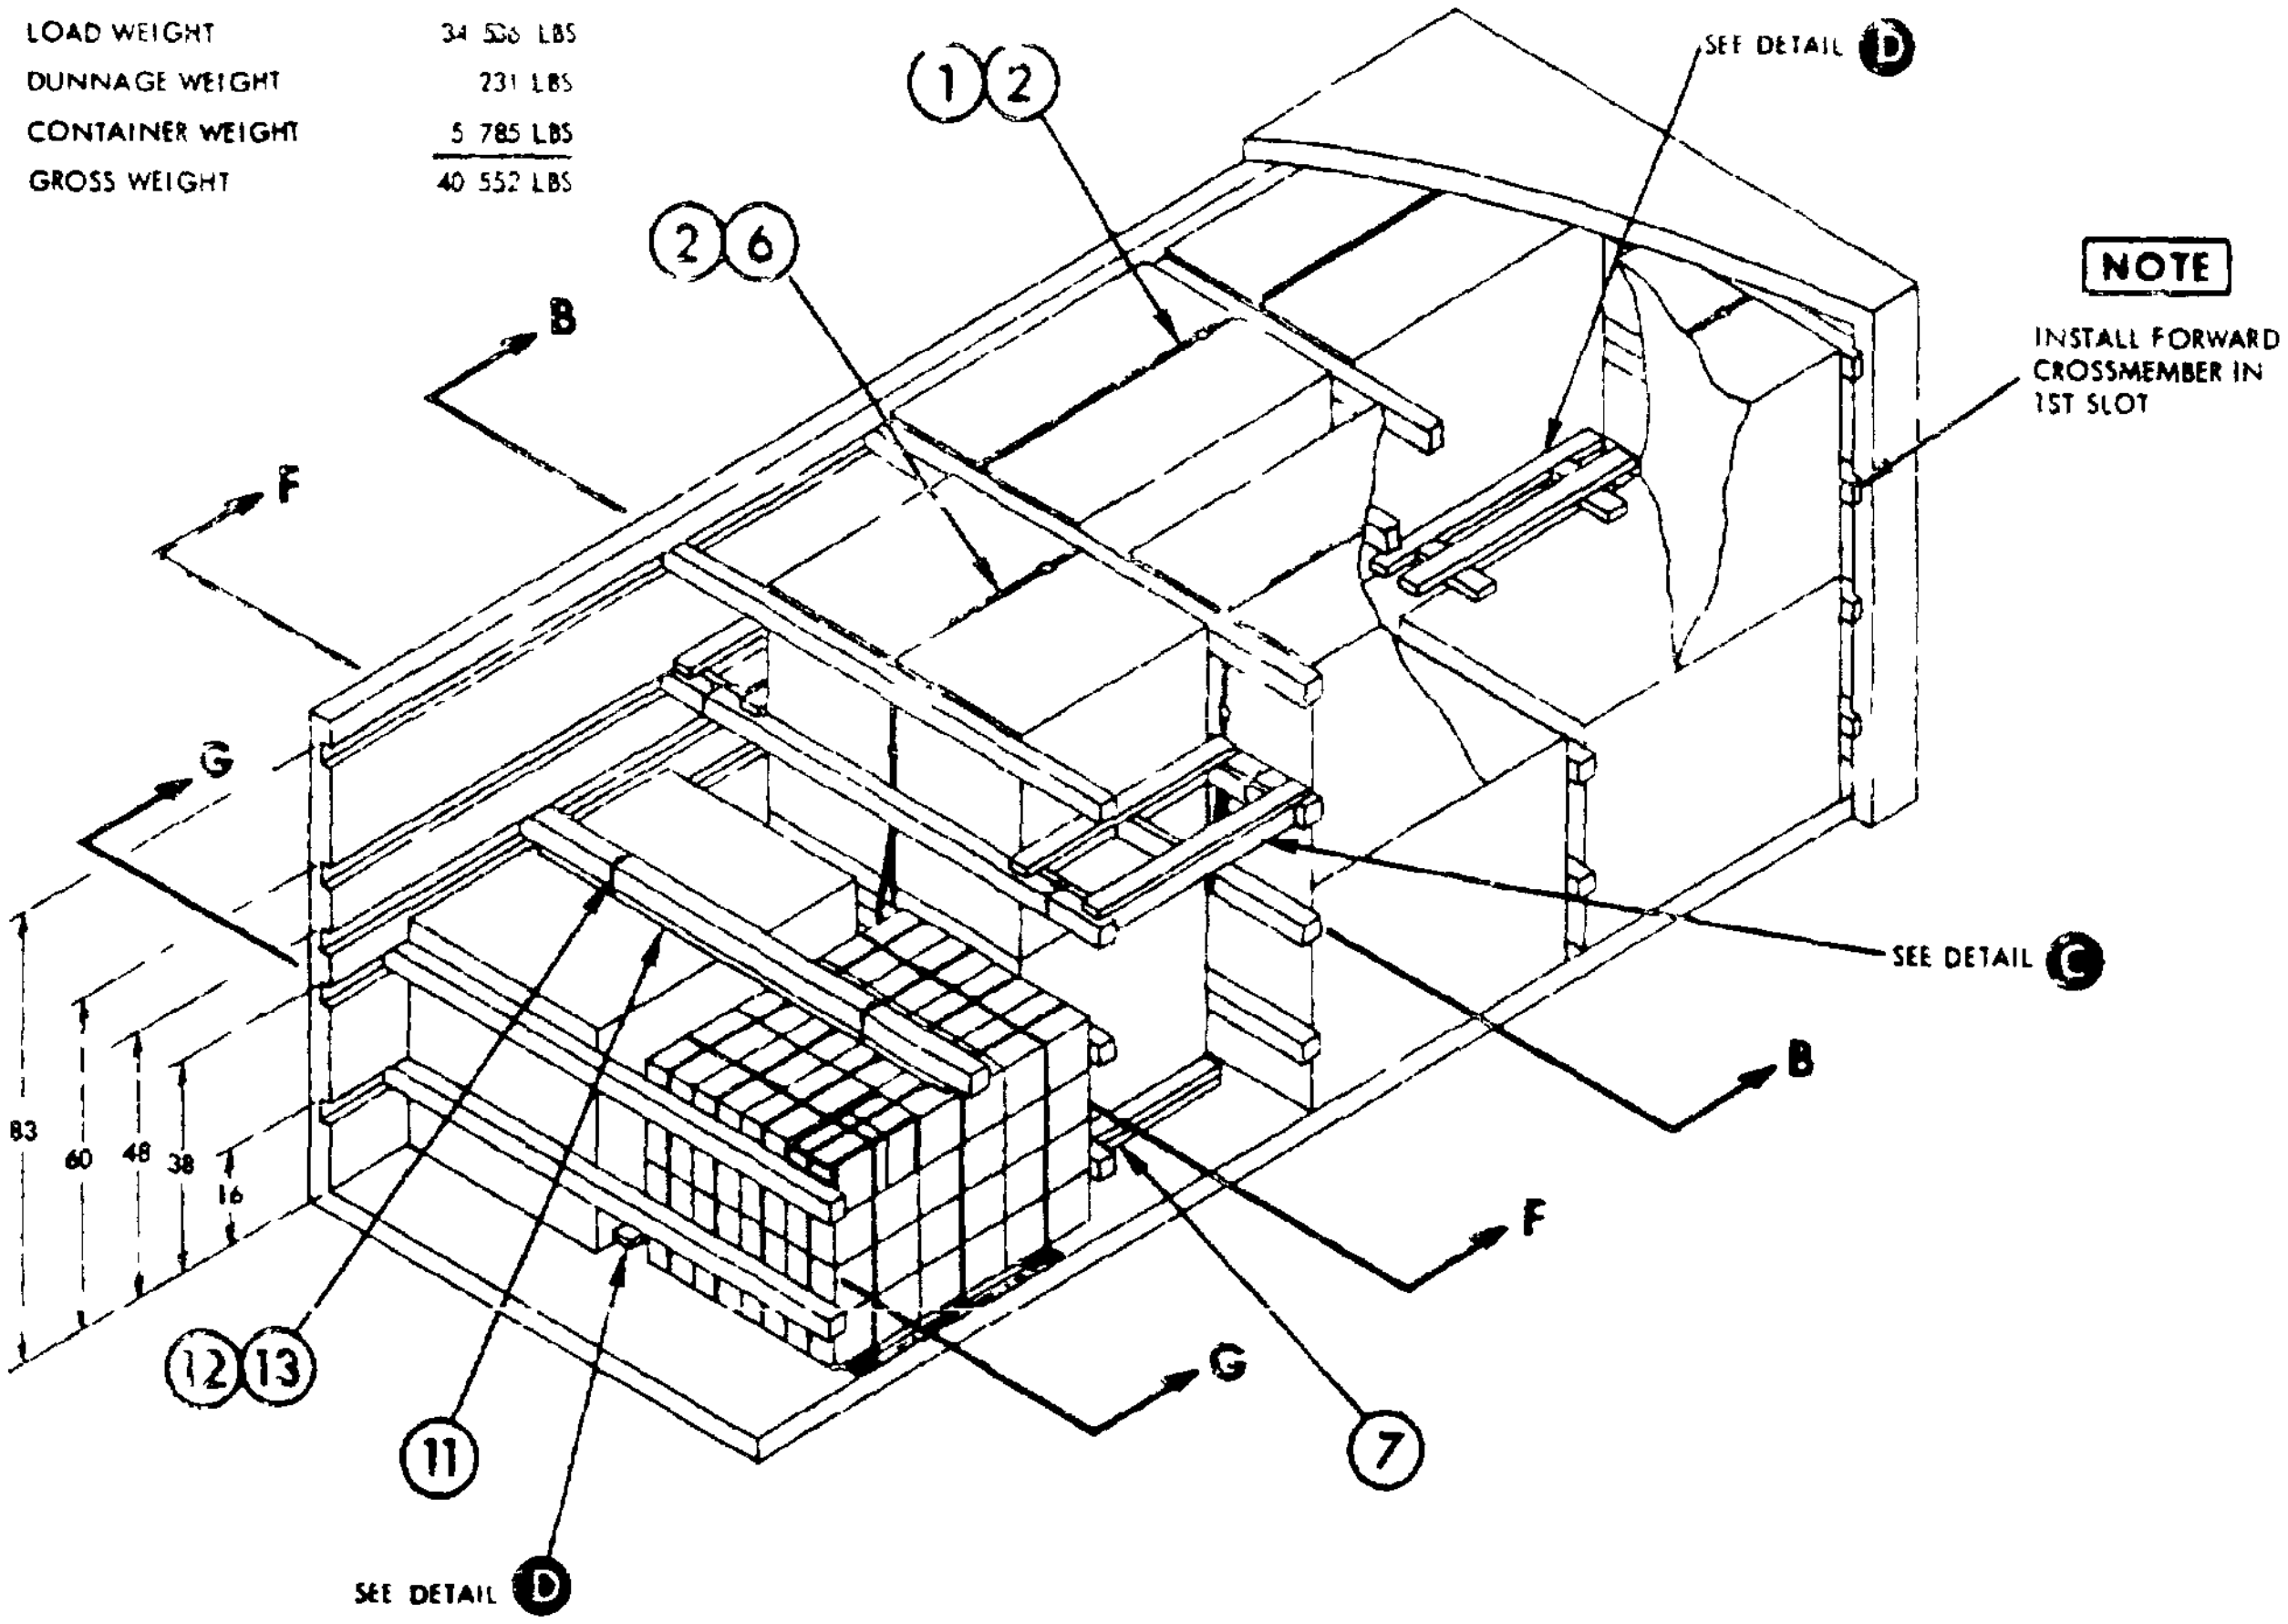

NOTE

INSTALL FORWARD CROSSMEMBER IN 1ST SLOT

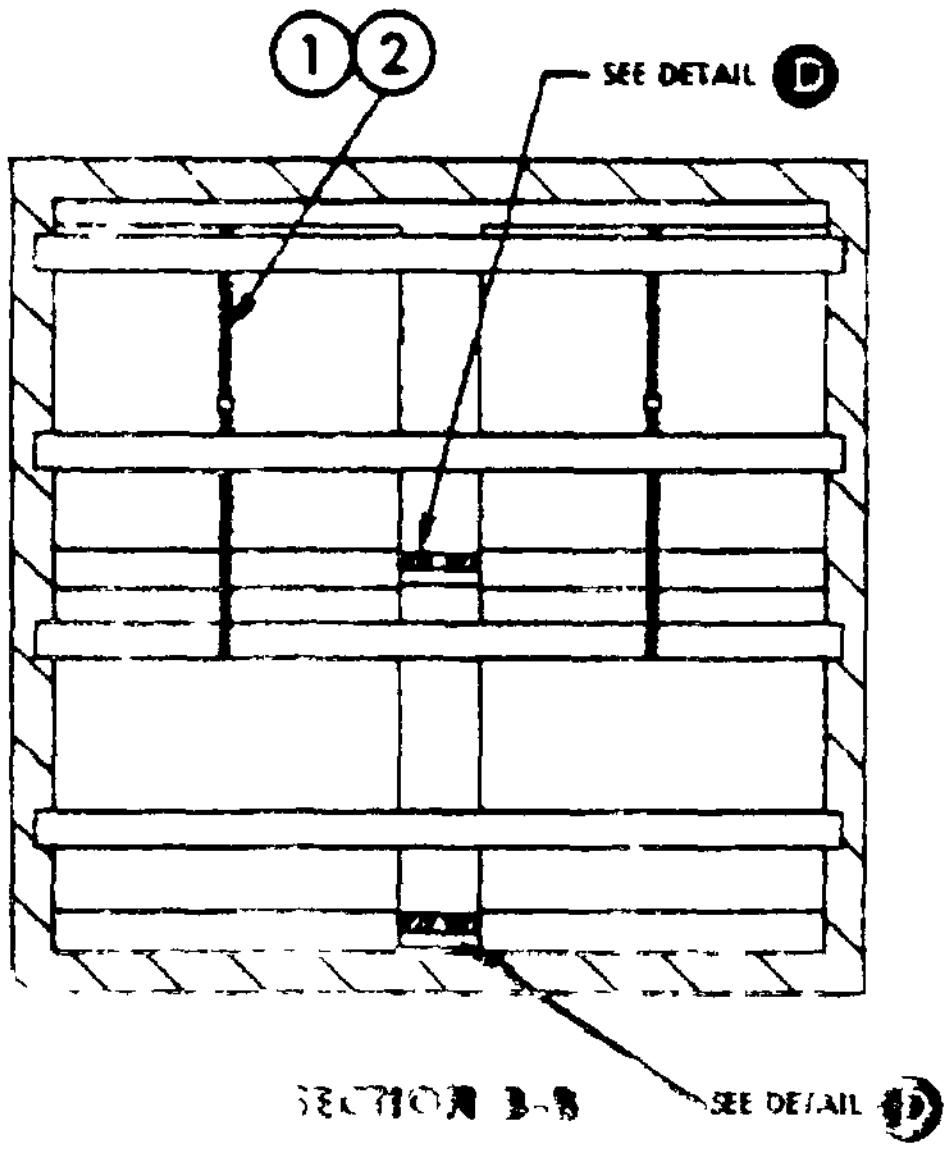

SECTION B-B

PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
13	SEAL	5/8	2	-	-	-
12	STRAP	5/8 x 020 x 30	2	-	-	-
11	SHIM	4 WIDE x 90 L x THICKNESS TO SUIT	1	SEE GENERAL NOTE 11		
10	RETAINER PIECE	2 x 4 x 46	4	9 8	1/JOINT 4	16d 16d
9	STRUT	2 x 4 TO SUIT (SEE NOTE 12)	6	SEE 8	[illegible]	-
8	BUFFER PIECE	2 x 4 x 40 1/2	4	9	2 PER JOINT	16d
7	SLEEPER	2 x 4 x 40	4	SEE SECTION F-F		
6	STRAP	1 1/4 x 035 x 16 FT	1	-	-	-
5	SPACER	2 x 4 x TO SUIT	10	3	2	10d
4	STRINGER	2 x 4 x 48	10	3	3 PER JOINT	10d
3	SUPPORT	2 x 4 x 22 1/2	10	SEE 4	-	-
2	SEAL	1 1/4	5	-	-	-
1	STRAP	1 1/4 x 035 x 17 FT	4	-	-	-

LIST OF MATERIALS & NAILING DATA

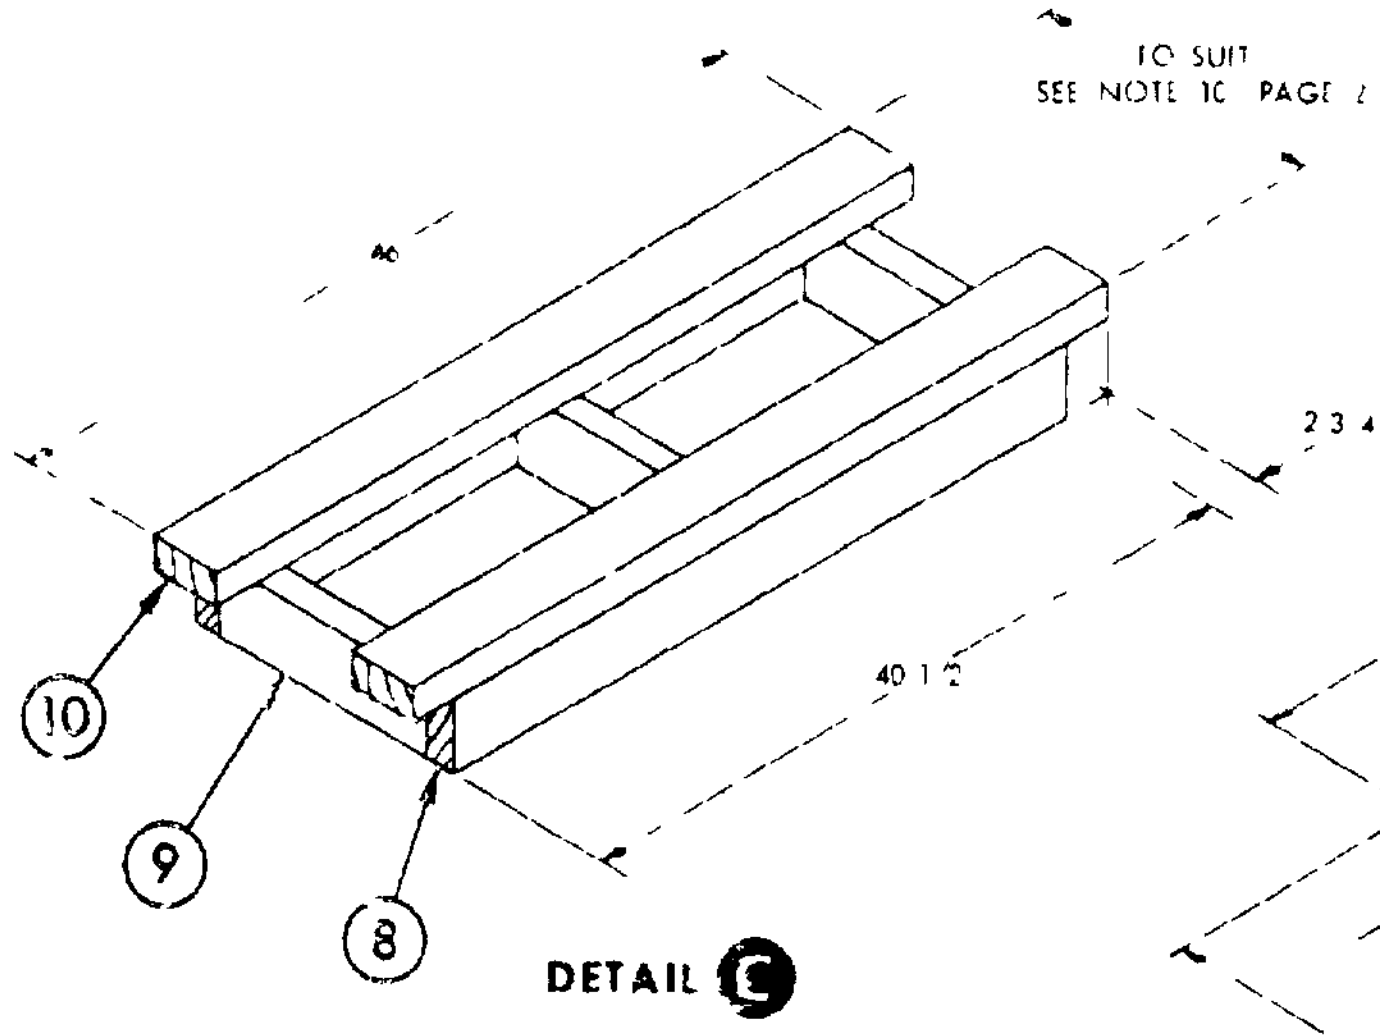

DETAIL C

SWAY BRACE FRAME
2 REQUIRED

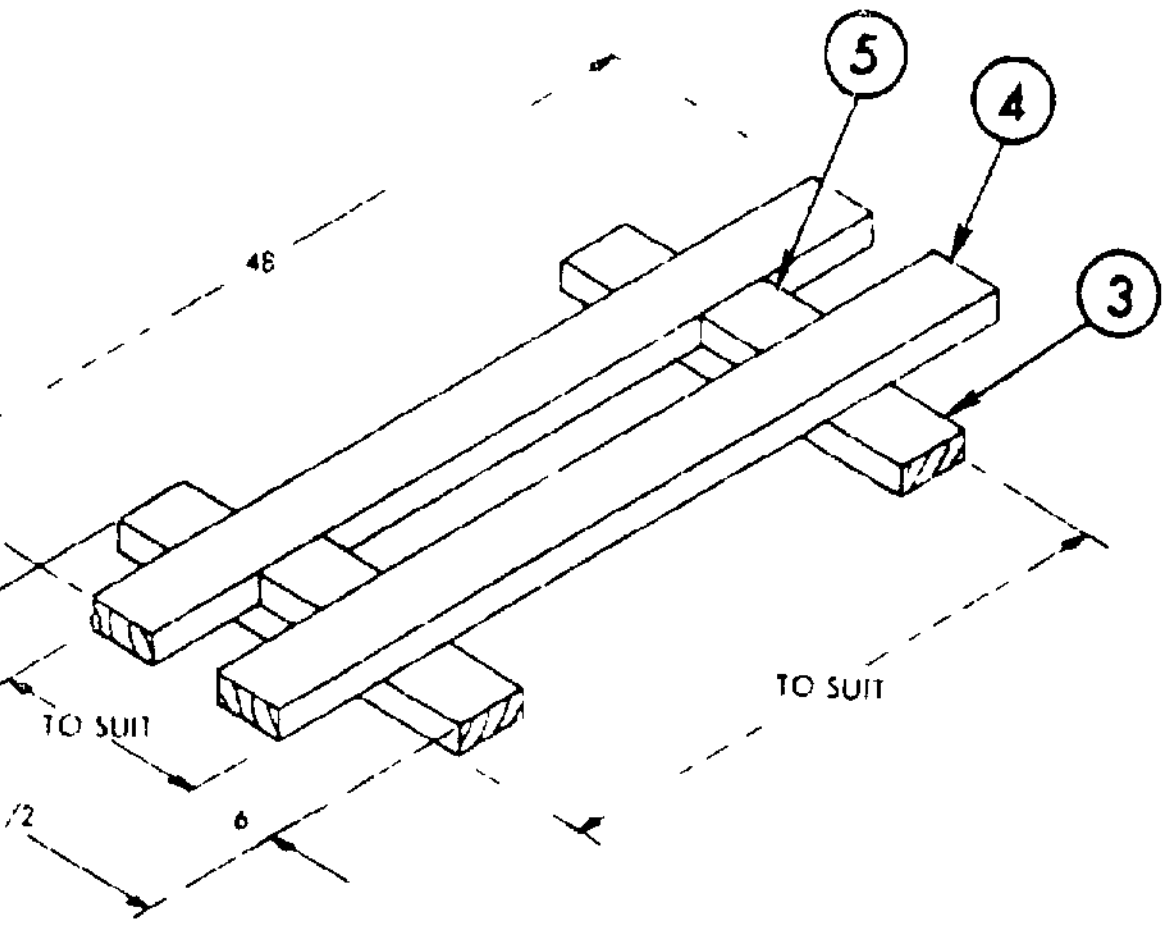

DETAIL D

SWAY BRACE FRAME
5 REQUIRED
TO BE ASSEMBLED IN PLACE
SEE NOTE 9 PAGE 2

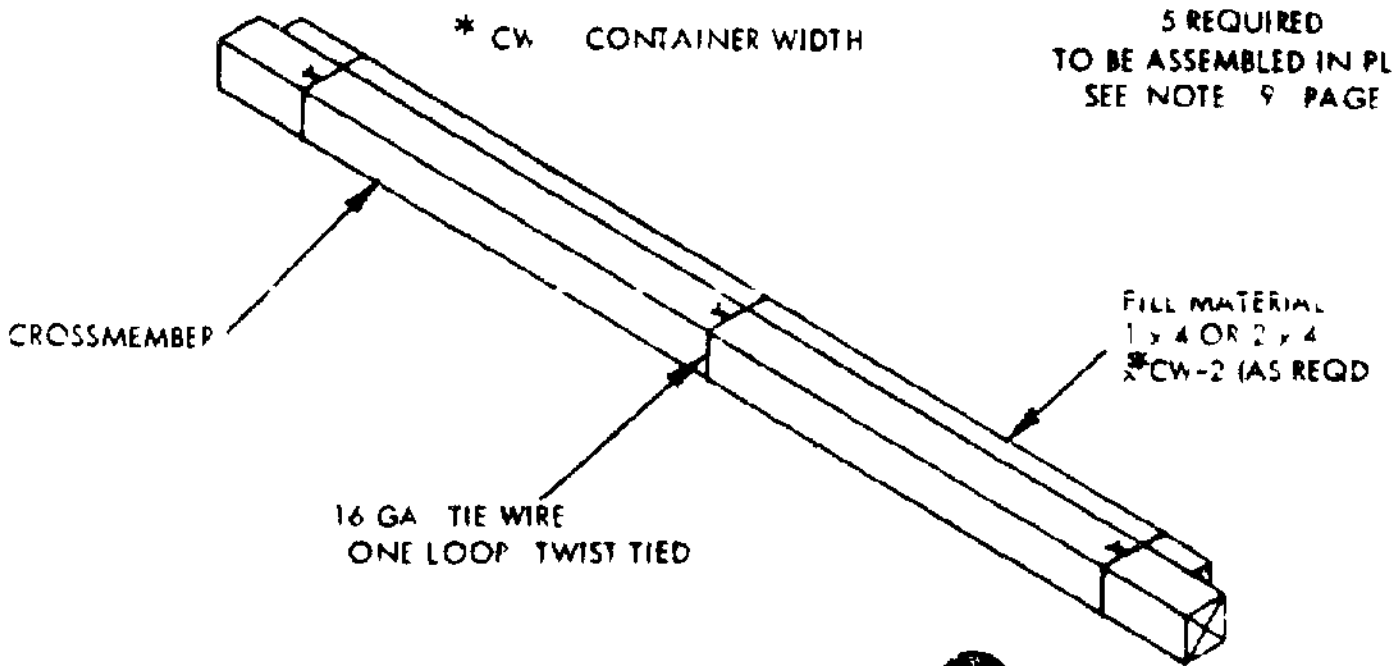

DETAIL E

FILL MATERIAL
SEE NOTE 6 PAGE 2

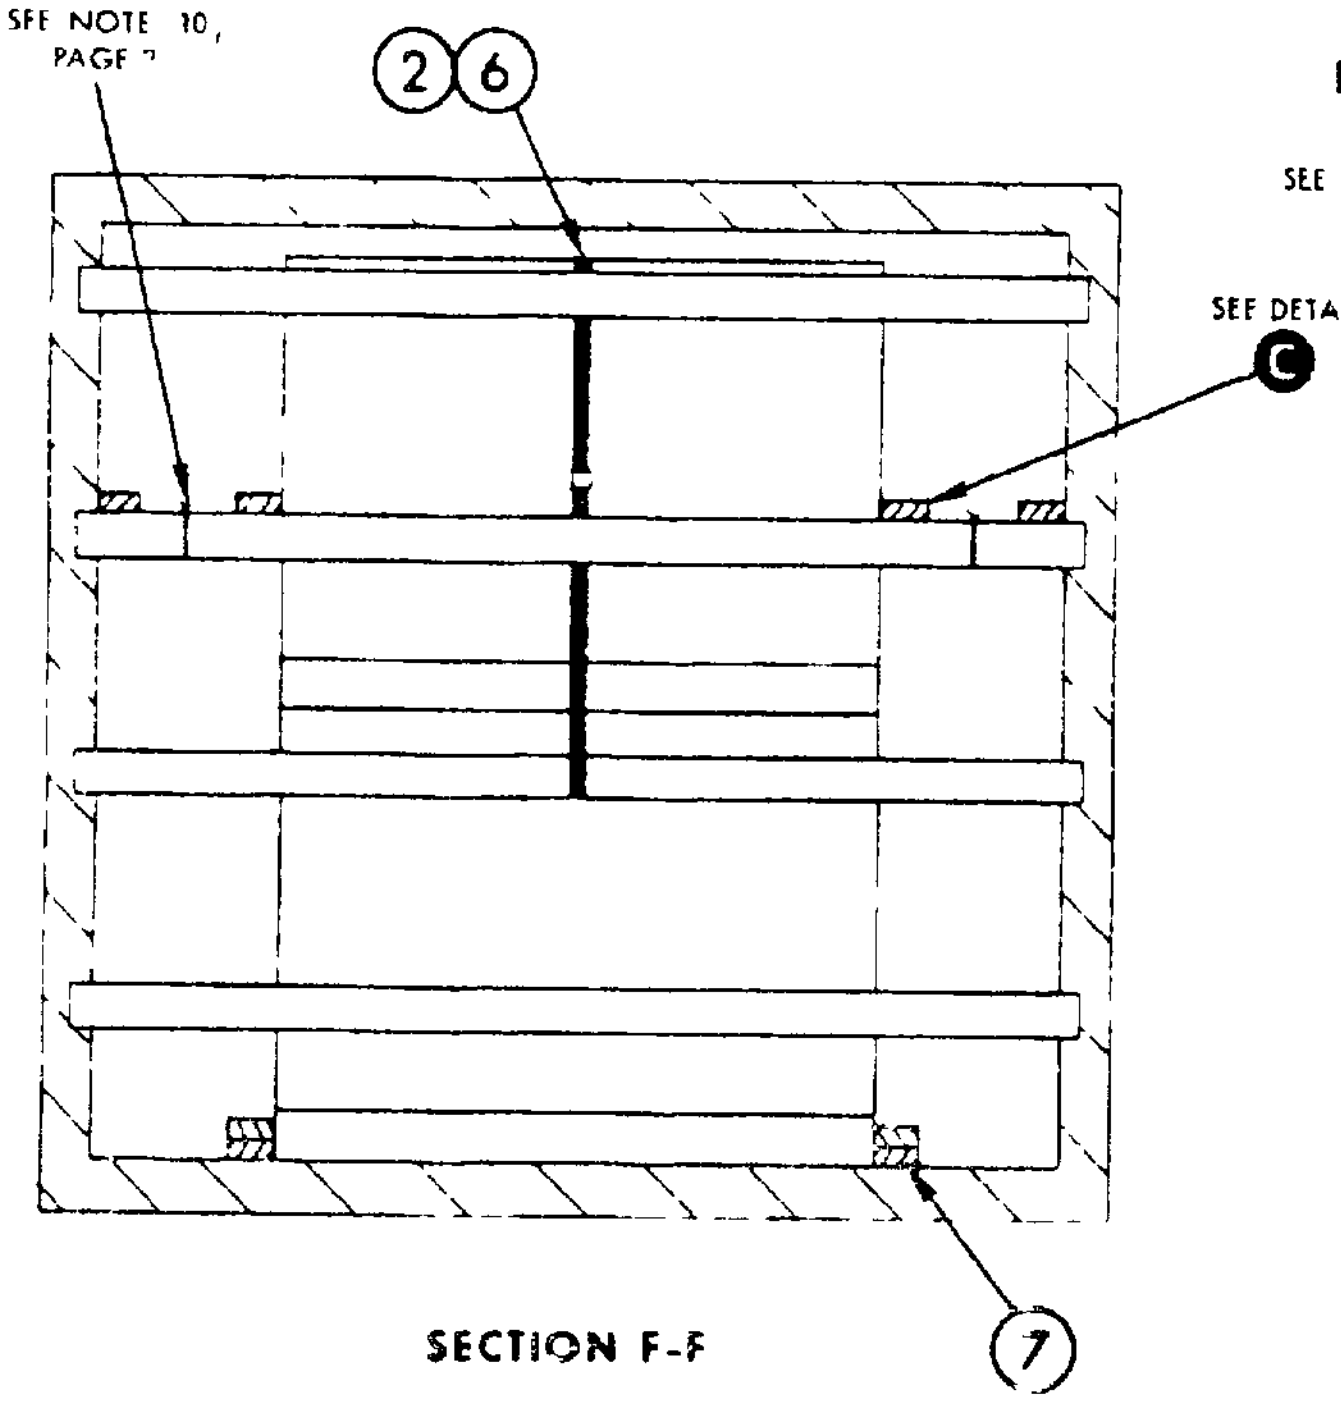

SECTION F-F

2 x 4 DOUBLED NAIL 1ST PIECE
TO CONTAINER FLOOR W/1-16d
NAIL EVERY EIGHT INCHES
NAIL 2ND PIECE TO 1ST IN LIKE
MANNER

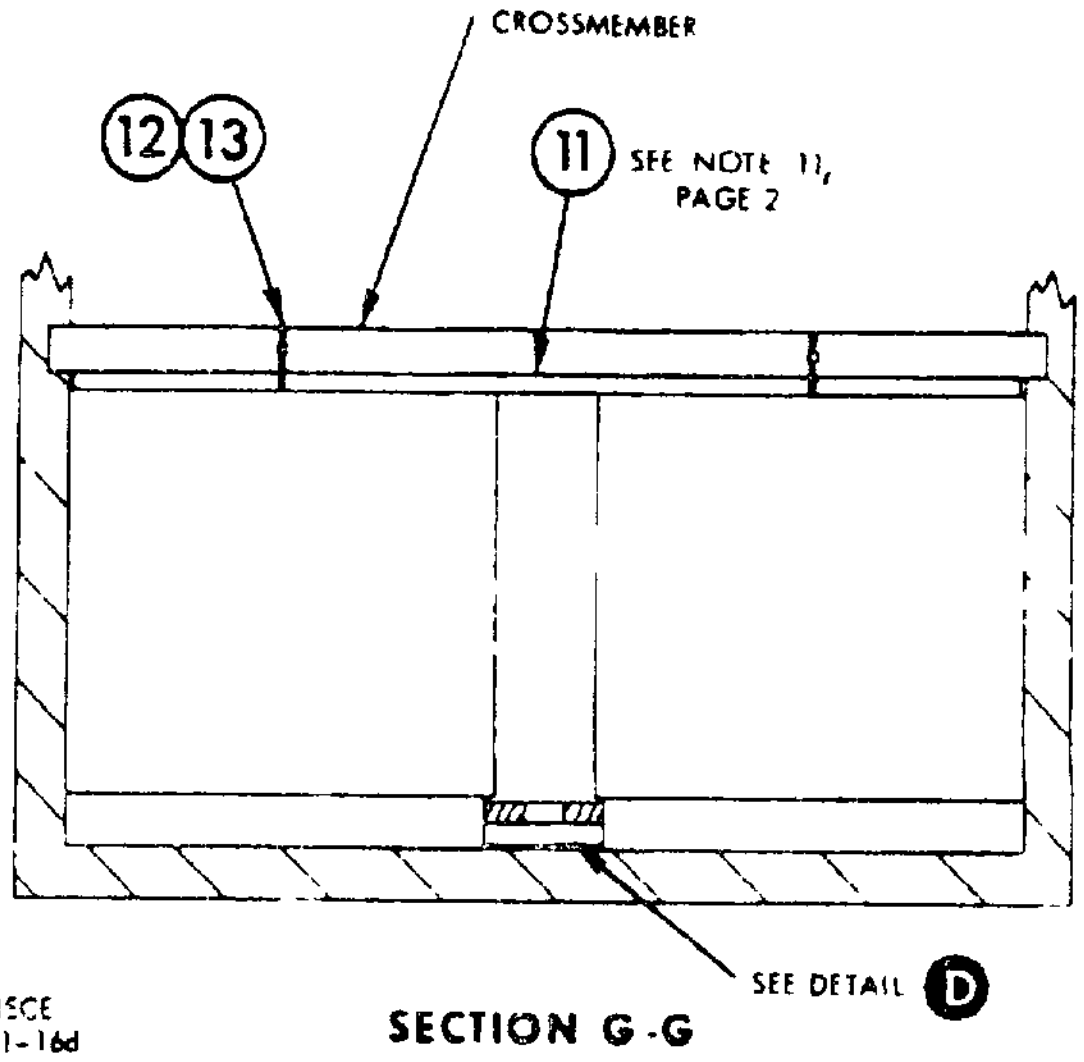

SECTION G-G