MILITARY STANDARD


LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

PARAPAC ASSEMBLY MK 36 MOD 0 FOR UNDERWATER MINE MK 53 FLEET ISSUE UNIT LOAD

MIL-STD-1386-62
(NAVY)
30 SEPTEMBER 1975

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54/2B
DIMENSIONS	38 L X 38 W X 38 3/4 H
WEIGHT (APPROX)	430 LBS
CUBE	51.6 CU FT
DOT HAZARD CLASSIFICATION	INERT
COAST GUARD CLASS	NONE

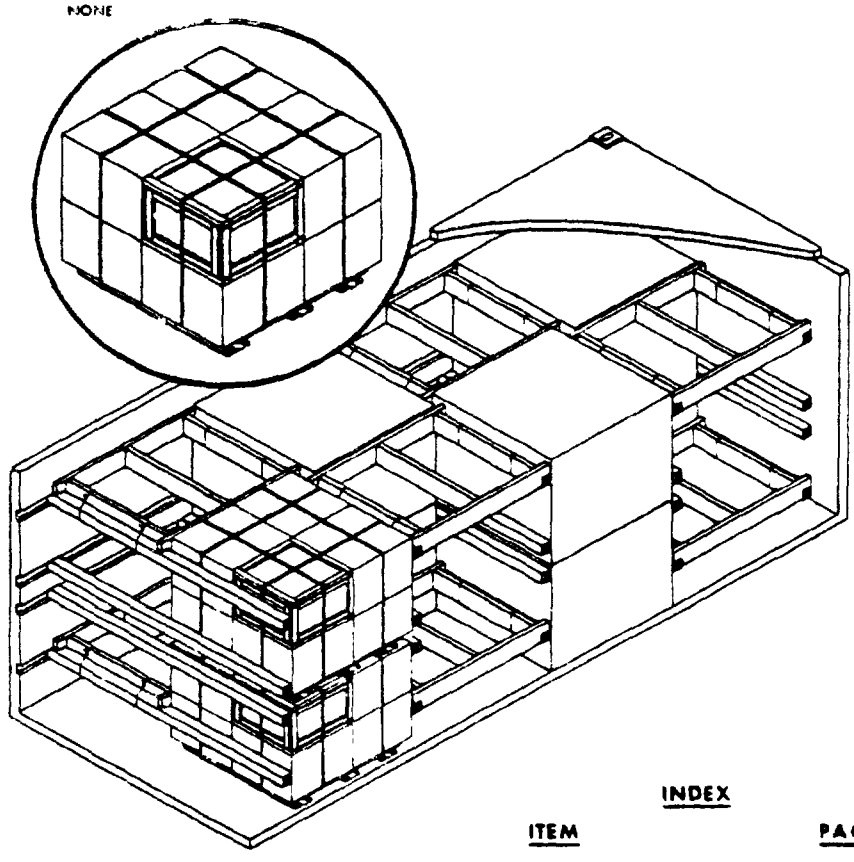

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCK-LOADING AND CARLOADING MILITARY STANDARDS, REFER TO THE INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC, CONTAINER-SHIP & HIGHWAY	2 & 3
DETAILS	2

FSC 8140

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENTS

W. S. Lang NAVSEA 9/15/75
SIGNATURE (TECHNICAL DIRECTION AGENT (NAVY)) DATE

T. E. Kelley 9/15/75
SIGNATURE SEASYSCOM BY DIRECTION DATE

ORIGINATOR P. J. Stanley 9/15/75
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
N A D EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF THE PARAPAC ASSEMBLY MK 36 MOD 0 FOR UNDERWATER MINE MK 55 THE UNIT LOADS SHALL BE PALLETIZED IN ACCORDANCE WITH WR-54 238
2. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C
3. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR
4. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO THE BELT RAILS FOR SHIPMENT

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT THE CROSSMEMBERS ARE LOCKED SECURELY IN PLACE


5. WHEN THE LONGITUDINAL SLACK BETWEEN A CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN THE CROSSMEMBER AND THE UNIT LOAD, AS SHOWN IN DETAIL B
6. LENGTH OF STRUT PIECE 1, SHALL BE SUFFICIENT TO CAUSE SWAY BRACE, DETAIL A, TO FILL VOID BETWEEN THE UNIT LOAD AND THE CONTAINER SIDEWALL TWIST-TIE BOTH ENDS OF ASSEMBLY TO CROSSMEMBER WITH 16 GAUGE SOFT ANNEALED WIRE, 4 PLACES
7. APPLICABLE MATERIAL SPECIFICATIONS
   DUNNAGE LUMBER - FED SPEC MM-L-751
   NAILS - FED SPEC FF-N-105 TYPE II, STYLE 10 COMMON BRIGHT
8. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA CLOSE AND SEAL THE CONTAINER DOORS

TOFC/COFC, CONTAINERSHIP AND HIGHWAY


1. THE CONTAINER LOAD CONSISTS OF 8 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT
2. THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS
   a. ONE CONTAINER ON A 20 FT MILVAN CHASSIS WITH DOUBLE BOGGIES AND PULLED BY A DOUBLE DRIVE AXLE TRAILER
   b. TWO CONTAINERS ON A 40 FT MILVAN CHASSIS WITH DOUBLE BOGGIES LOCATED IN THE REARMOST POSITION AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR
3. ONE OR TWO LOADED CONTAINERS MAY ALSO BE TRANSPORTED OVER PUBLIC HIGHWAY ON SUITABLE COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY THAT MEETS THE REQUIREMENTS OF THE CODE OF FEDERAL REGULATIONS
4. THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED
   a. ONE CONTAINER ON A 20 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGGIES
   b. TWO CONTAINERS ON A 40 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGGIES

WARNING

CHASSIS CONTAINERS COUPLED INTO A 40 FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC CAR THE REAR END OF THE 40 FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END 20 FT AND 40 FT UNITS CAN BE LOADED ON THE SAME CAR

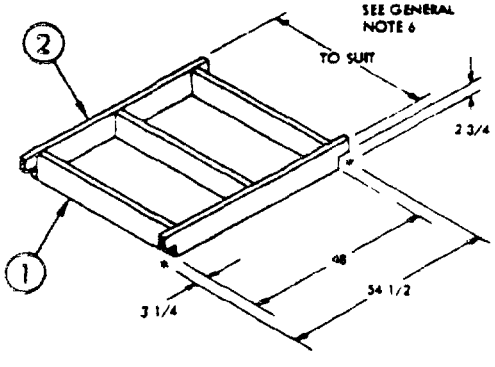


DETAIL A
SWAY-BRACE
8 REQUIRED

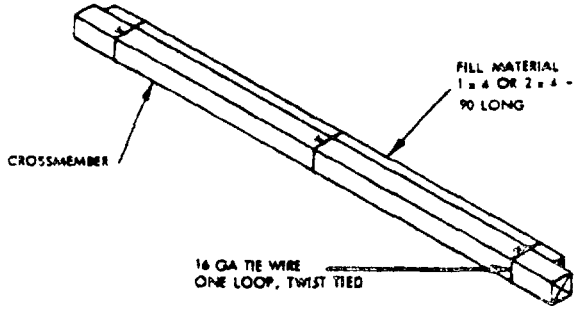

DETAIL B
FILL MATERIAL
SEE GENERAL NOTE 5


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.

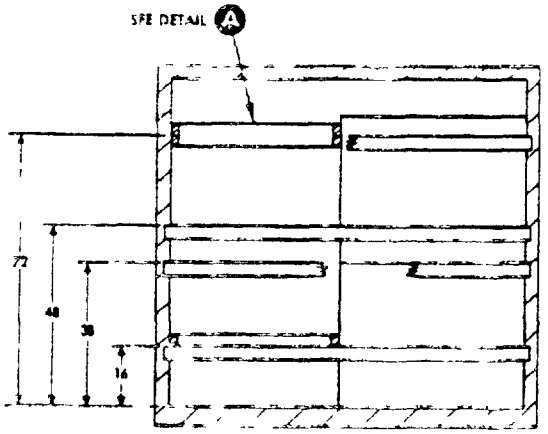

SECTION C-C

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	8
NUMBER OF CROSSMEMBERS REQ'D	20
LOAD WEIGHT (APPROX)	6 640 LBS
DUNNAGE WEIGHT (APPROX)	365 LBS
CONTAINER WEIGHT	5,785 LBS
GROSS WEIGHT (APPROX)	12,790 LBS

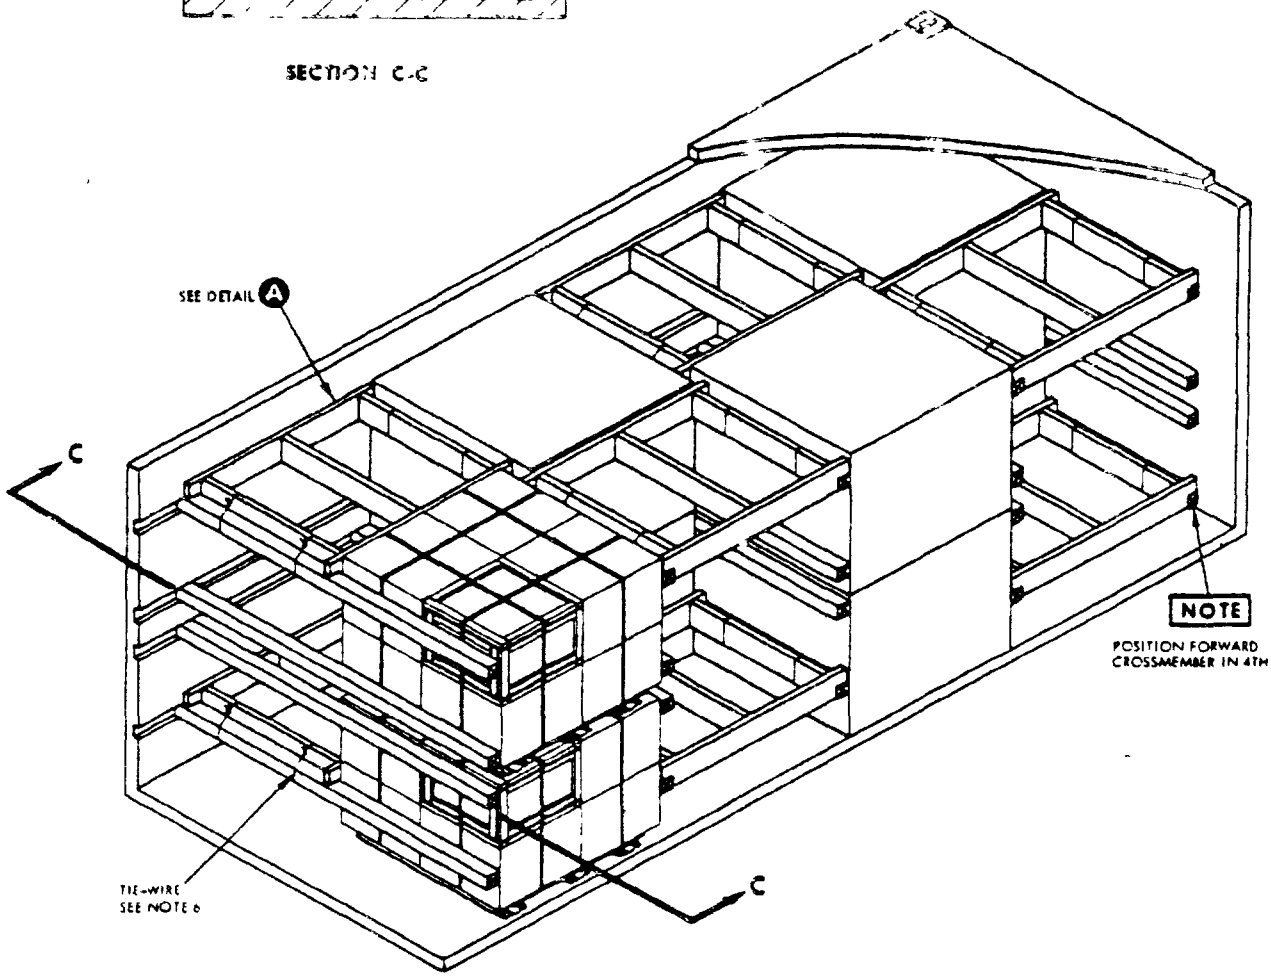

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NUMBER	SIZE
2	HORIZONTAL	2 x 6 x 54 - 2	16	1	3/ JOINT	16d
1	STRUT	2 x 6 x TO SUIT	24	SEE 2	-	-
					NAILS	

LIST OF MATERIALS AND MARKING DATA

FOFC/COFC, CONTAINERSHIP AND HIGHWAY

REVIEW ACTIVITY
NAVY - OS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO. 8140-N-2971)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.