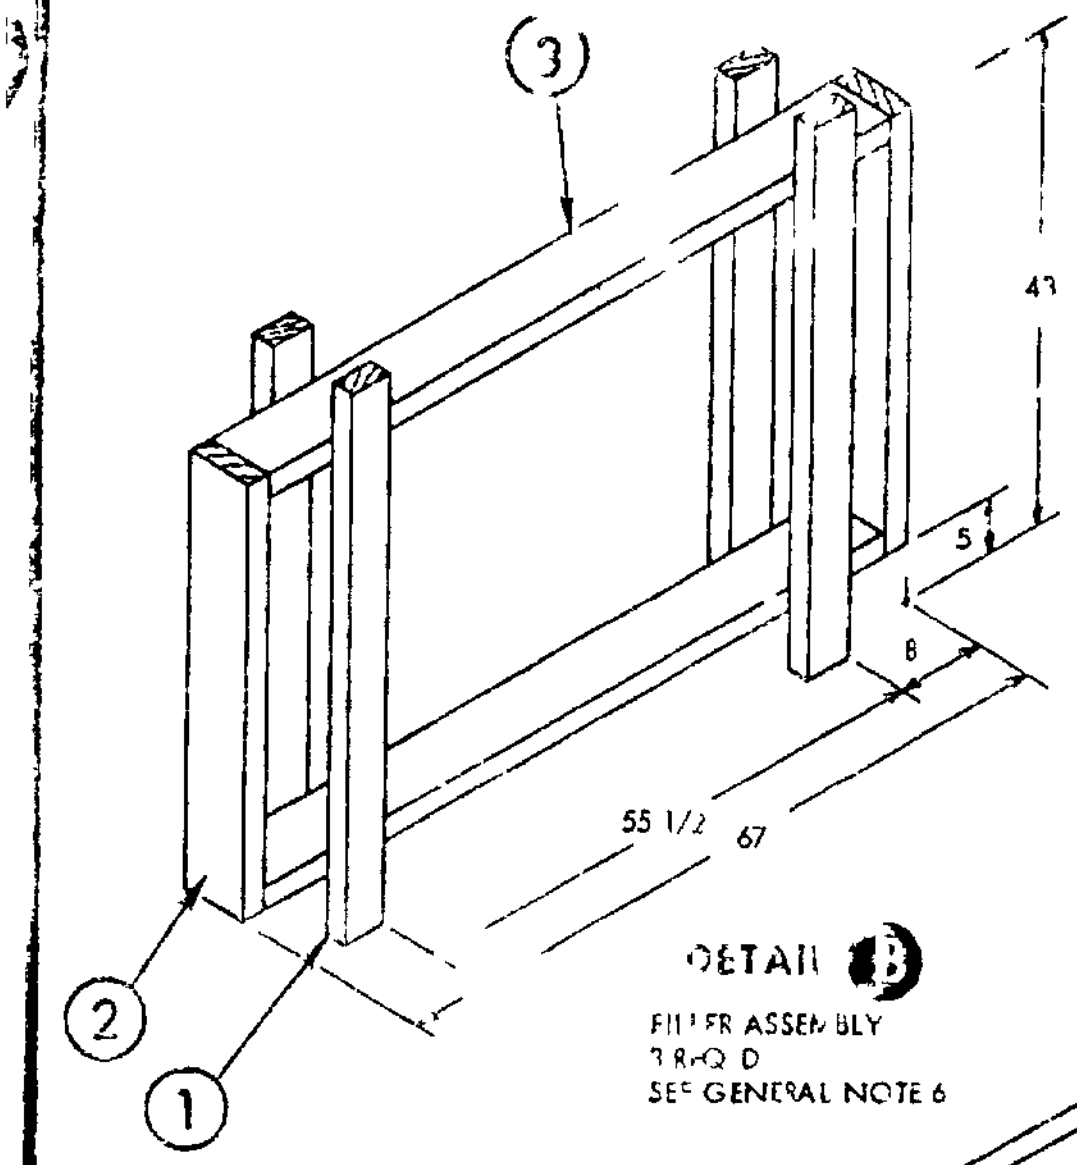

DETAIL B
FILLER ASSEMBLY
3 REQ'D
SEE GENERAL NOTE 6

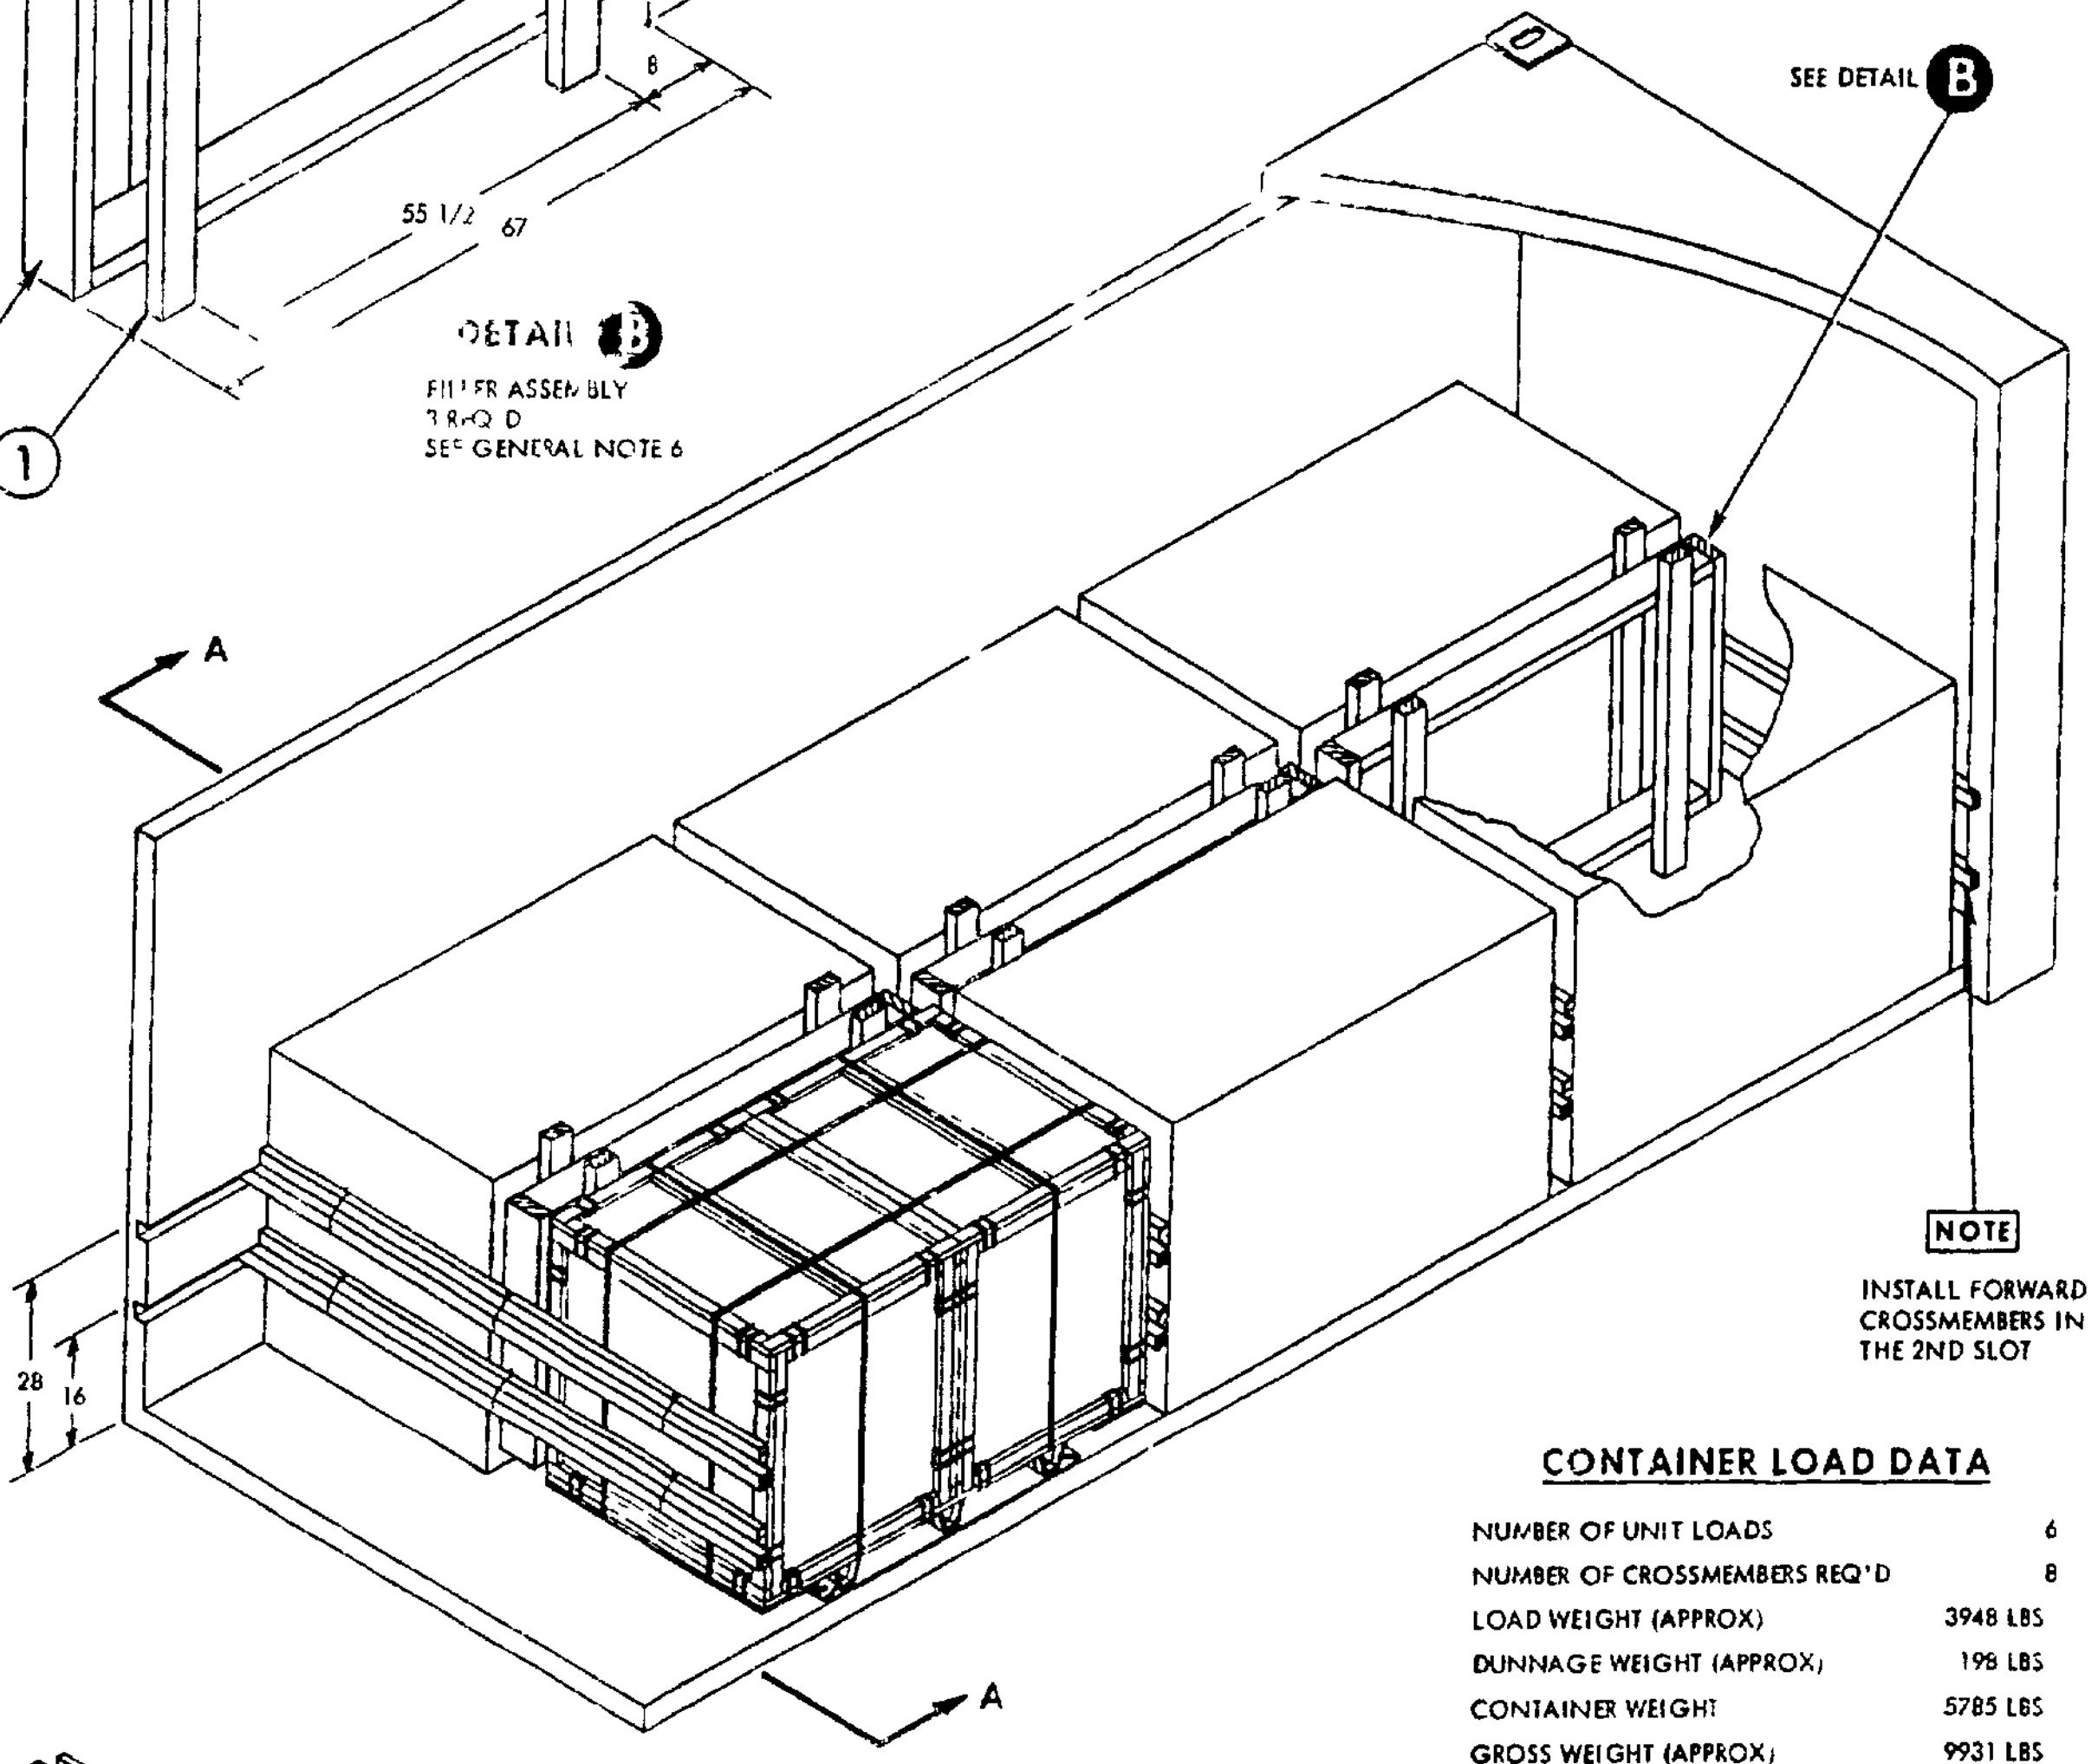

NOTE
INSTALL FORWARD CROSSMEMBERS IN THE 2ND SLOT

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	6
NUMBER OF CROSSMEMBERS REQ'D	8
LOAD WEIGHT (APPROX)	3948 LBS
DUNNAGE WEIGHT (APPROX)	198 LBS
CONTAINER WEIGHT	5785 LBS
GROSS WEIGHT (APPROX)	9931 LBS

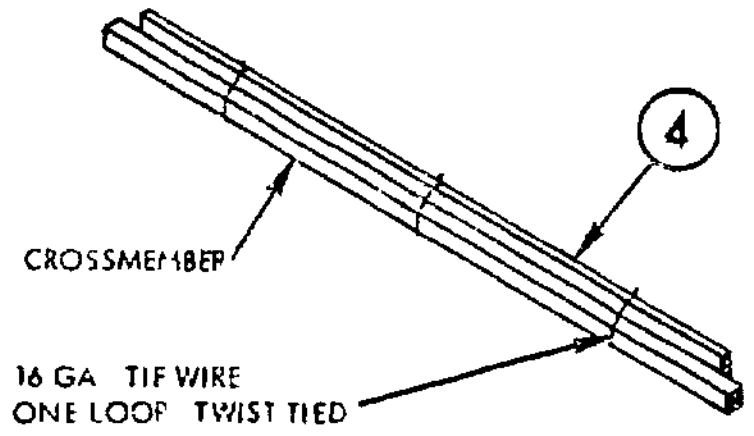

DETAIL C
FILL MATERIAL
SEE GENERAL NOTE 5

PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
4	SHIM	4 WIDE X 90 LONG X THICKNESS TO SUIT	AS REQ'D	SEE GENERAL NOTE 5		
3	HORIZONTAL	2 X 6 X 67	6	SEE 2	-	-
2	END VERTICAL	2 X 6 X 38	6	3	3/JOINT	12d
1	SIDE VERTICAL	2 X 4 X 46	12	3	2/JOINT	12d

LIST OF MATERIALS & NAILING DATA

TOFC/COFC, CONTAINERSHIP AND HIGHWAY

REVIEW ACTIVITY
NAVY - 15

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO 8110-N-299)

MIL-STD-1386-63
(NAVY)

31 OCTOBER 1975

MILITARY STANDARD

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

FLIGHT GEAR, UNDERWATER MINE MK 55
IN CONTAINER MK 586 MOD 0
FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54/245
WEIGHT	658 LBS
DIMENSIONS	67 3/4L X 41 1/2W X 45 5/8H
CUBE	74.2 CU FT

DOT HAZARD CLASSIFICATION - INERT

COAST GUARD CLASS - NONE

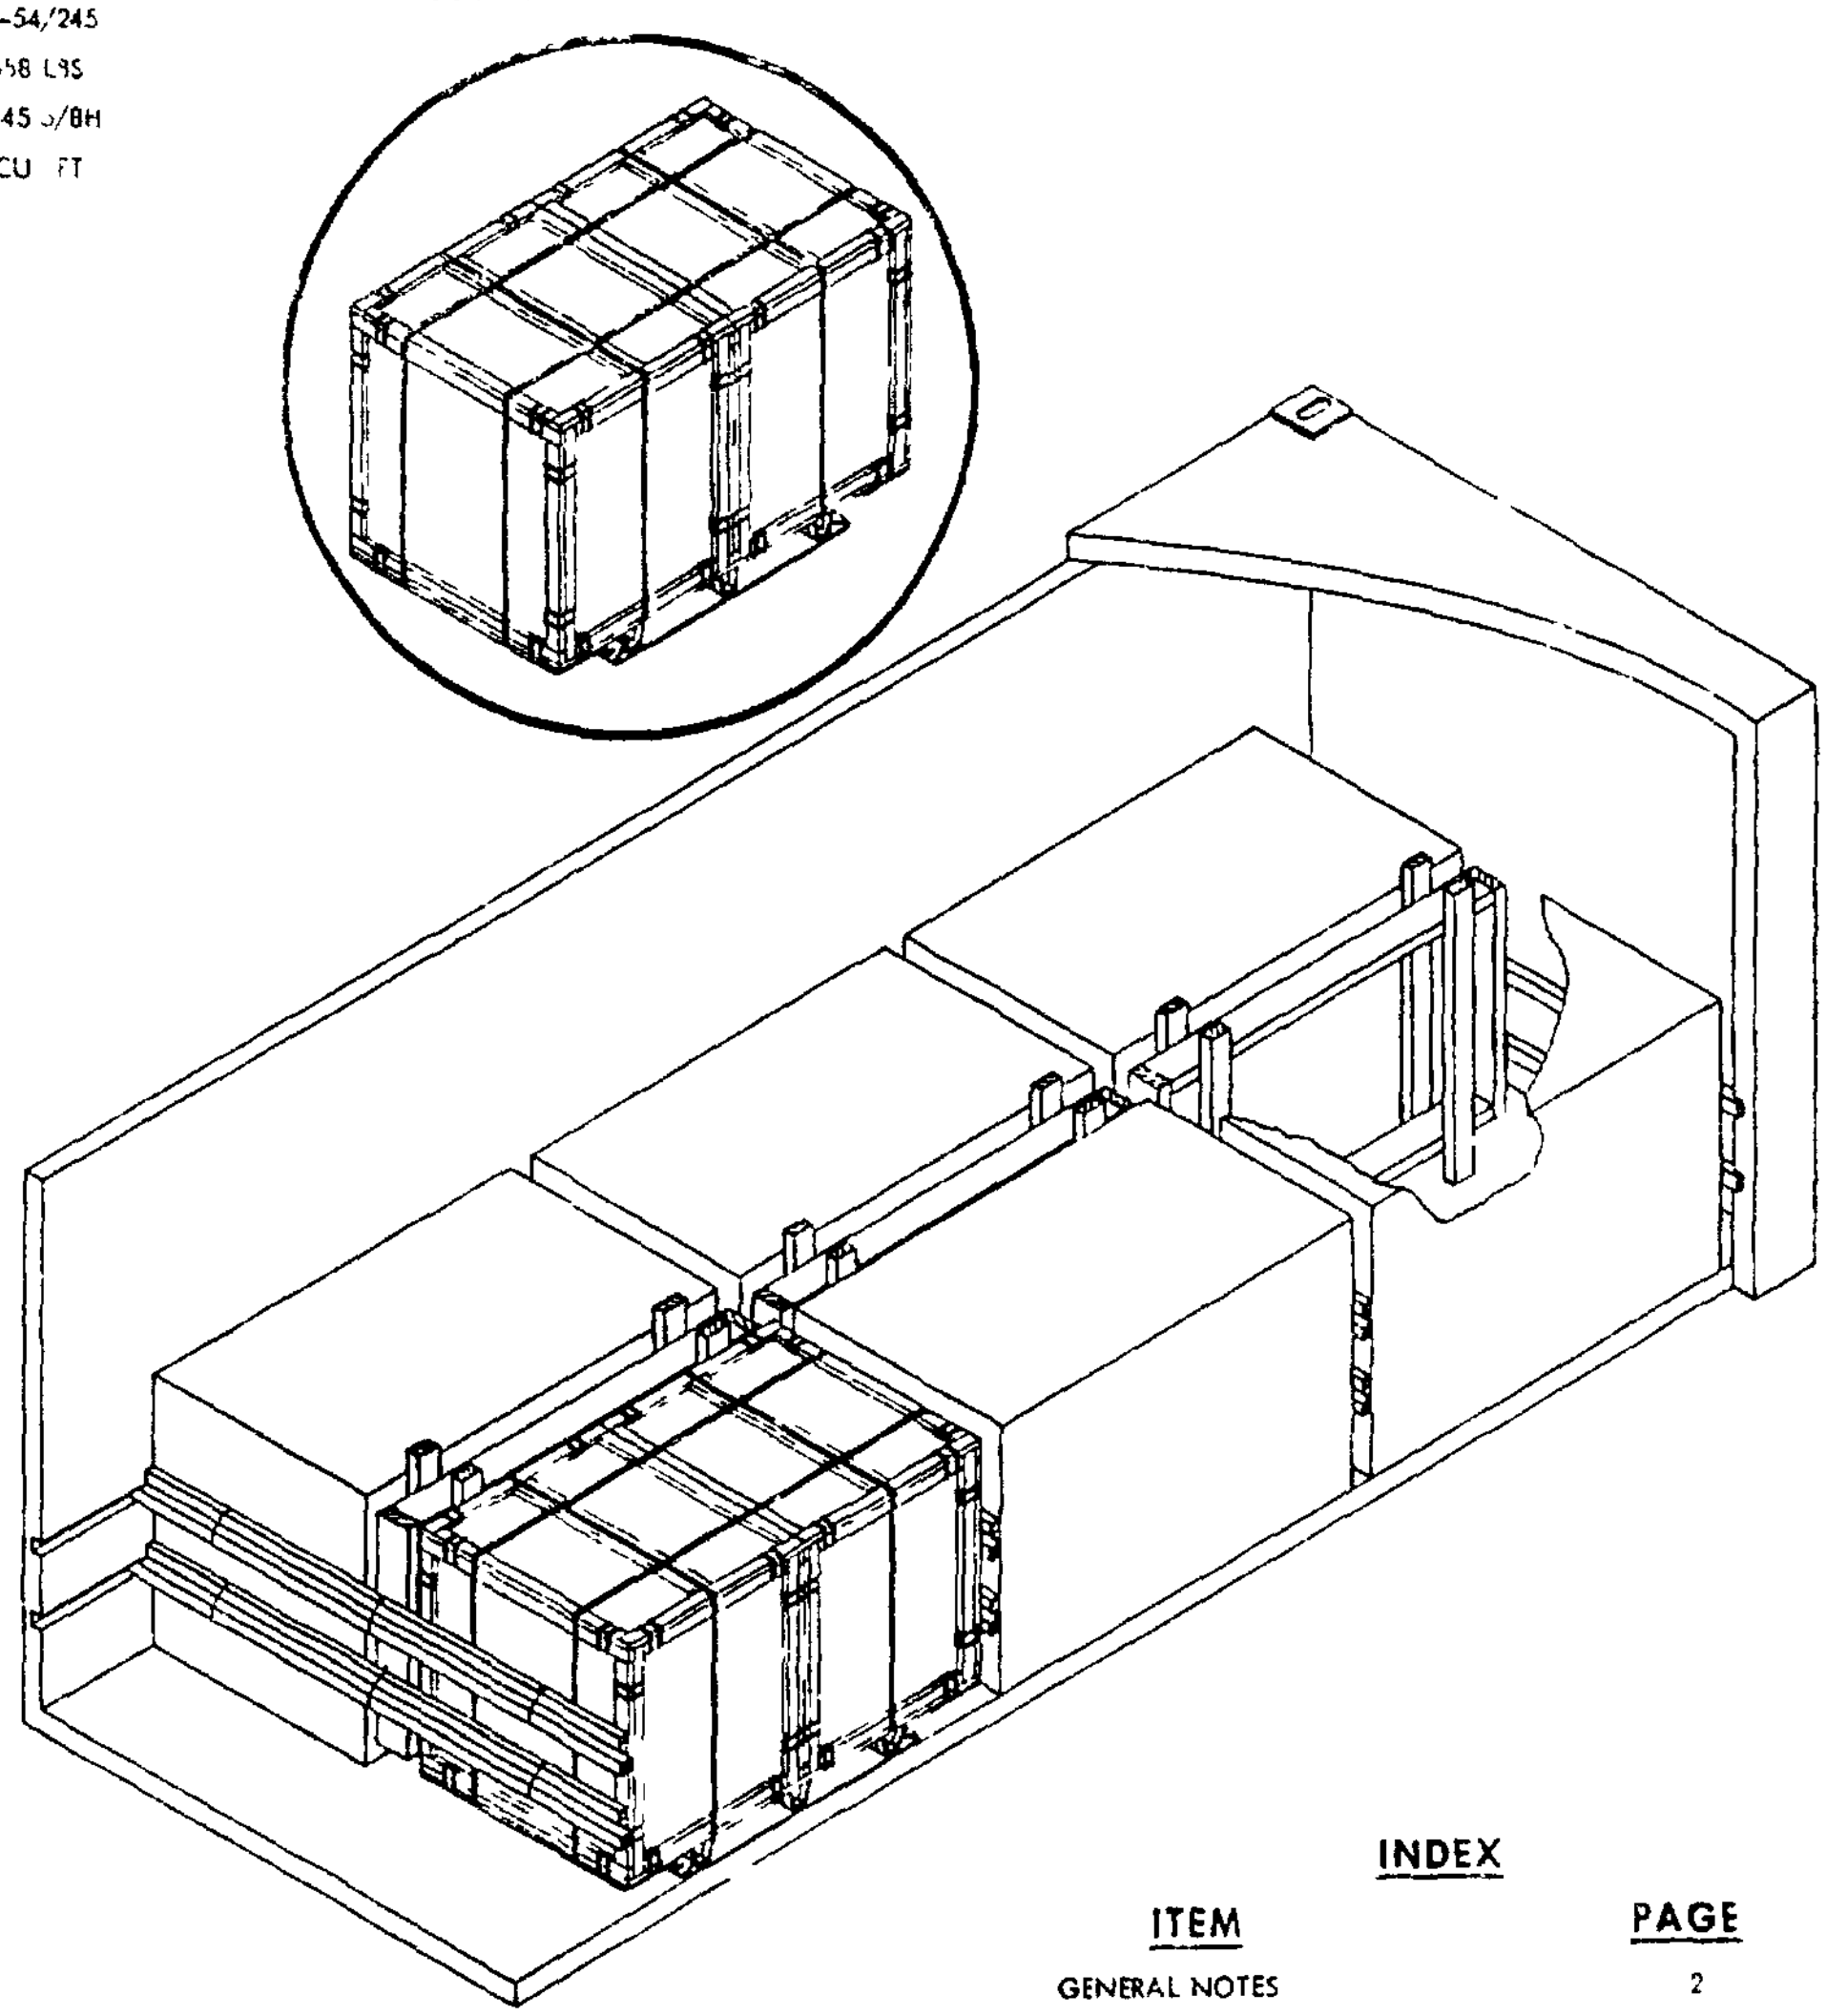

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC, CONTAINERSHIP & HIGHWAY	2 & 3

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO THE INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

FSC 8140

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENTS

M S Gray NWHL 10/25/75
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

10/25/75
SIGNATURE SEAS COM BY DIRECTION DATE

ORIGINATOR
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
WPNSTA EARLE, NEW JERSEY

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF UNDERWATER MINE MK 55 FLIGHT GEAR IN CONTAINERS MK 586 MOD 0 THE UNIT LOADS SHALL BE PALLETIZED IN ACCORDANCE WITH WR-54/245

2 THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C

3 IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR

4 CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT THE CROSSMEMBERS ARE LOCKED SECURELY IN PLACE

5 WHEN THE LONGITUDINAL SLACK BETWEEN A CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH INSTALL SHIM, PIECE 4 TO THE CROSSMEMBER TO FILL THE VOID TWIST TIE WITH 3 PIECES OF 16 GAUGE SOFT ANNEALED WIRE, AS SHOWN IN DETAIL C THIS SHIM MAY BE ADDED OR OMITTED AS REQUIRED

6 THICKNESS OF FILLER ASSEMBLY, DETAIL B, MAY BE VARIED TO FILL THE VOID BETWEEN UNIT LOADS

7 APPLICABLE MATERIAL SPECIFICATIONS DUNNAGE LUMBER - FED SPEC MM-L-751, NAILS - FED SPEC FF-N-105, TYPE II STYLE 10 COMMON BRIGHT

8 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA, CLOSE AND SEAL CONTAINER DOORS

TOFC/COFC, CONTAINERSHIP AND HIGHWAY

1 THE CONTAINER CONSISTS OF 6 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT

2 THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS

A ONE CONTAINER ON 20 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES

B TWO CONTAINERS ON A 40 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES LOCATED IN THE REARMOST POSITION AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR

3 ONE OR TWO LOADED CONTAINERS MAY ALSO BE TRANSPORTED OVER PUBLIC HIGHWAYS ON SUITABLE COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY THAT MEETS THE REQUIREMENTS OF THE CODE OF FEDERAL REGULATIONS

4 THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED-

A ONE CONTAINER ON 20 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES

B TWO CONTAINERS ON 40 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES

WARNING

CHASSIS/CONTAINERS COUPLED WITH A 40 FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC CAR THE REAR END OF THE 40 FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END 20 FT AND 40 FT UNITS CAN BE LOADED ON THE SAME CAR

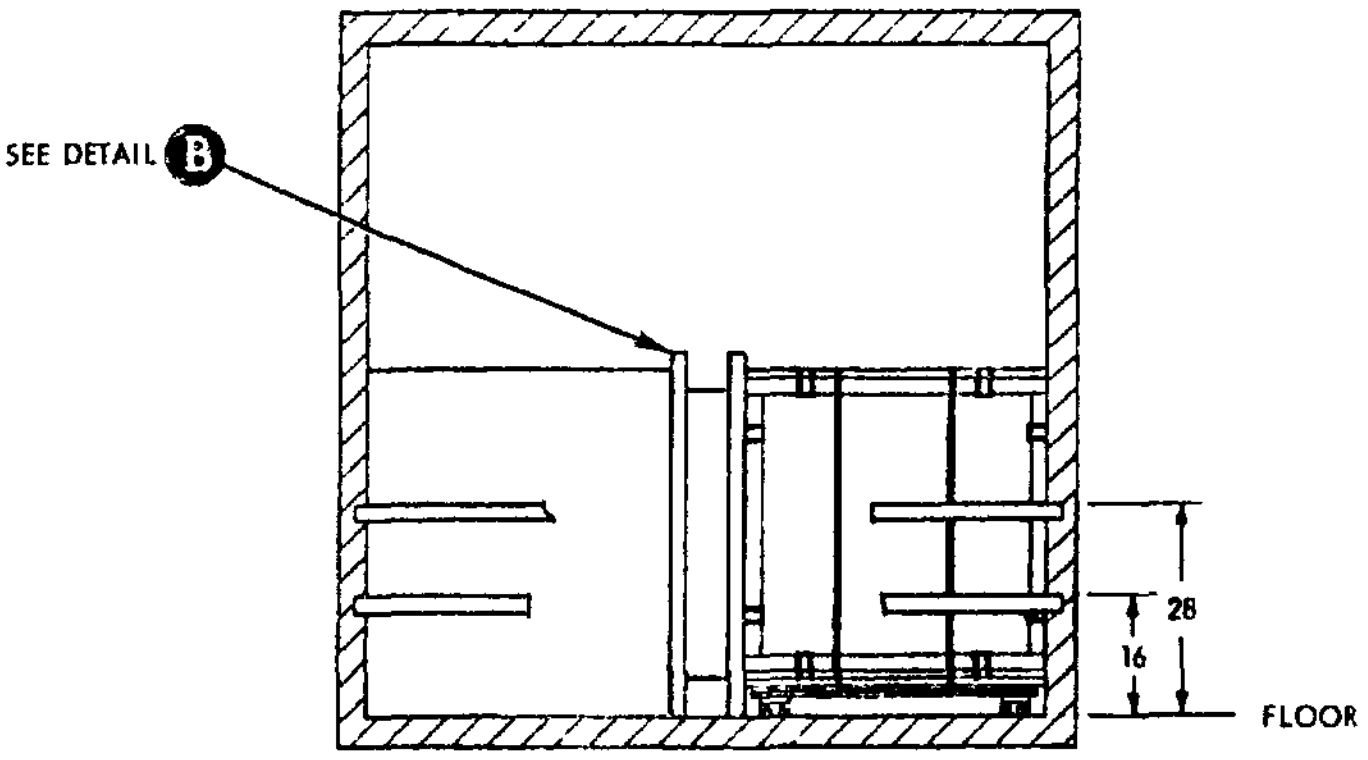

SECTION A-A