MILITARY STANDARD

MIL-STD 1386-64
(NAVY)


31 OCTOBER 1975

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

FLIGHT GEAR, UNDERWATER MINE MK 52
IN CONTAINER MK 585 MOD 0
FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WA-54/246
DIMENSIONS	57 1/2L X 40 1/8W X 40 1/2H
CUBE	54 0 CU FT
WEIGHT	503 LBS
HAZARD CLASSIFICATION	
DOT - INERT	
CC - NONE	

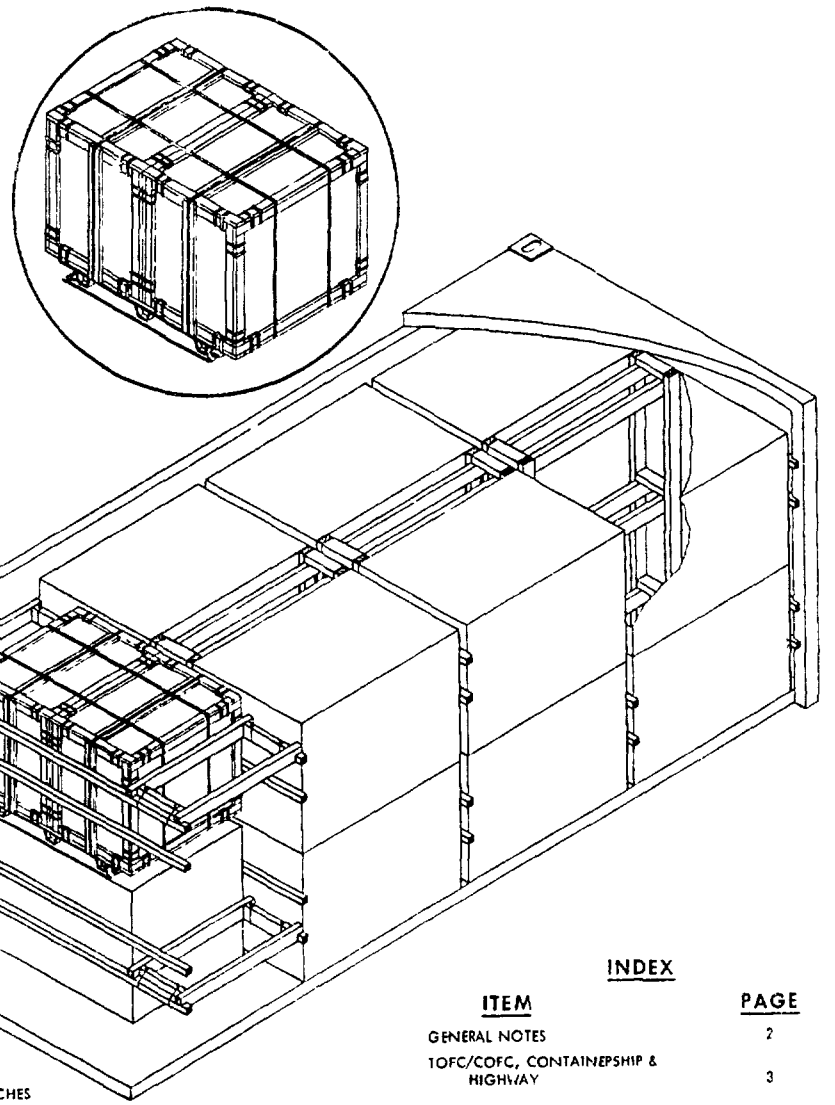

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC, CONTAINERSHIP & HIGHWAY	3

NOTES

1 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

2 FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO THE INDEX STANDARDS, MIL-HDBK-236 (NAVY)

FSC 8140

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENT

SIGNATURE — TECHNICAL DIRECTION AGENT (TDA) — DATE

SIGNATURE — SEASYSCOM BY DIRECTION — DATE

ORIGINATOR

SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF UNDERWATER MINE MK 52 FLIGHT GEAR IN CONTAINER MK 585 MOD 0 THE UNIT LOAD SHALL BE PALLETIZED IN ACCORDANCE WITH WR-54/246

2 THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C

3 IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR

4 CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT

CAUTION

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT THE CROSSMEMBERS ARE LOCKED SECURELY IN PLACE

5 LENGTH OF STRUTS, PIECE 2, DETAIL C, SHALL BE SUFFICIENT TO CAUSE SWAY BRACE TO BEAR AGAINST THE UNIT LOAD AND THE CONTAINER SIDE WALLS *TWIST-TIE ASSEMBLIES TO CROSSMEMBERS WITH 16 GAUGE TIE-WIRE, FOUR PLACES*

6 CENTER FRAME ASSEMBLY, DETAIL D MAY BE ASSEMBLED IN PLACE SPREADER, PIECE 3, SHALL BE OF SUFFICIENT LENGTH TO CAUSE THE FRAME ASSEMBLY TO FILL THE VOID BETWEEN THE UNIT LOADS

7 APPLICABLE MATERIAL SPECIFICATIONS DUNNAGE LUMBER - FED SPEC MM-L-751, NAILS - FED SPEC FF-N-105, TYPE II, STYLE 10, COMMON BRIGHT

8 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA, CLOSE AND SEAL CONTAINER DOORS

TOFC/COFC, CONTAINERSHIP AND HIGHWAY

1 THE CONTAINER CONSISTS OF 14 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS DOCUMENT

2 THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS

- A ONE CONTAINER ON 20 FT MILVAN CHASSIS WITH DOUBLE BOGIES
- B TWO CONTAINERS ON A 40 FT MILVAN CHASSIS WITH DOUBLE BOGIES LOCATED IN THE REARMOST POSITION AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR


3 ONE OR TWO LOADED CONTAINERS MAY ALSO BE TRANSPORTED OVER PUBLIC HIGHWAYS ON SUITABLE COMMERCIAL EQUIPMENT OF *APPROPRIATE CAPACITY THAT MEETS THE REQUIREMENTS OF THE CODE OF FEDERAL REGULATIONS*

4 THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED


- A ONE CONTAINER ON 20 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES
- B TWO CONTAINERS ON 40 FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES

WARNING

CHASSIS/CONTAINERS COUPLED INTO A 40 FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC CAR THE REAR END OF THE 40 FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END 20 FT AND 40 FT UNITS CAN BE LOADED ON THE SAME CAR

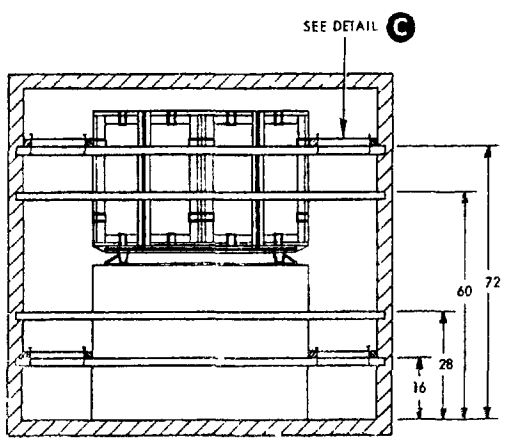


SECTION A-A

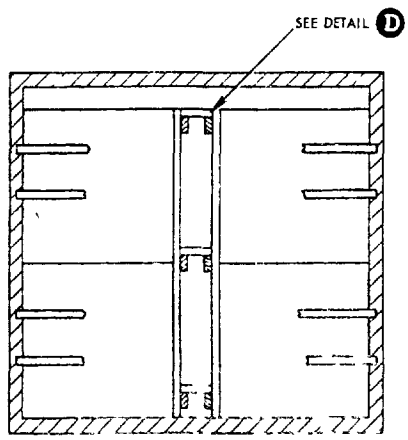


SECTION B-B

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.

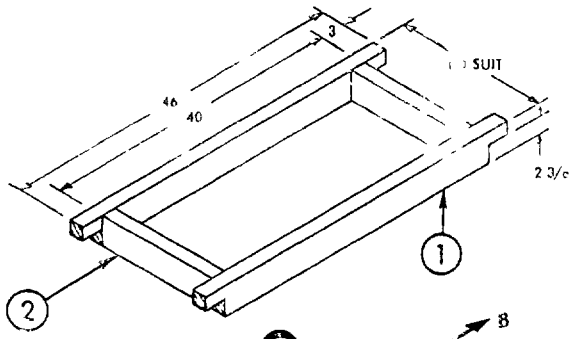


DETAIL C

SWAY BRACE ASSEMBLY
4 REQ'D
SEE GENERAL NOTES

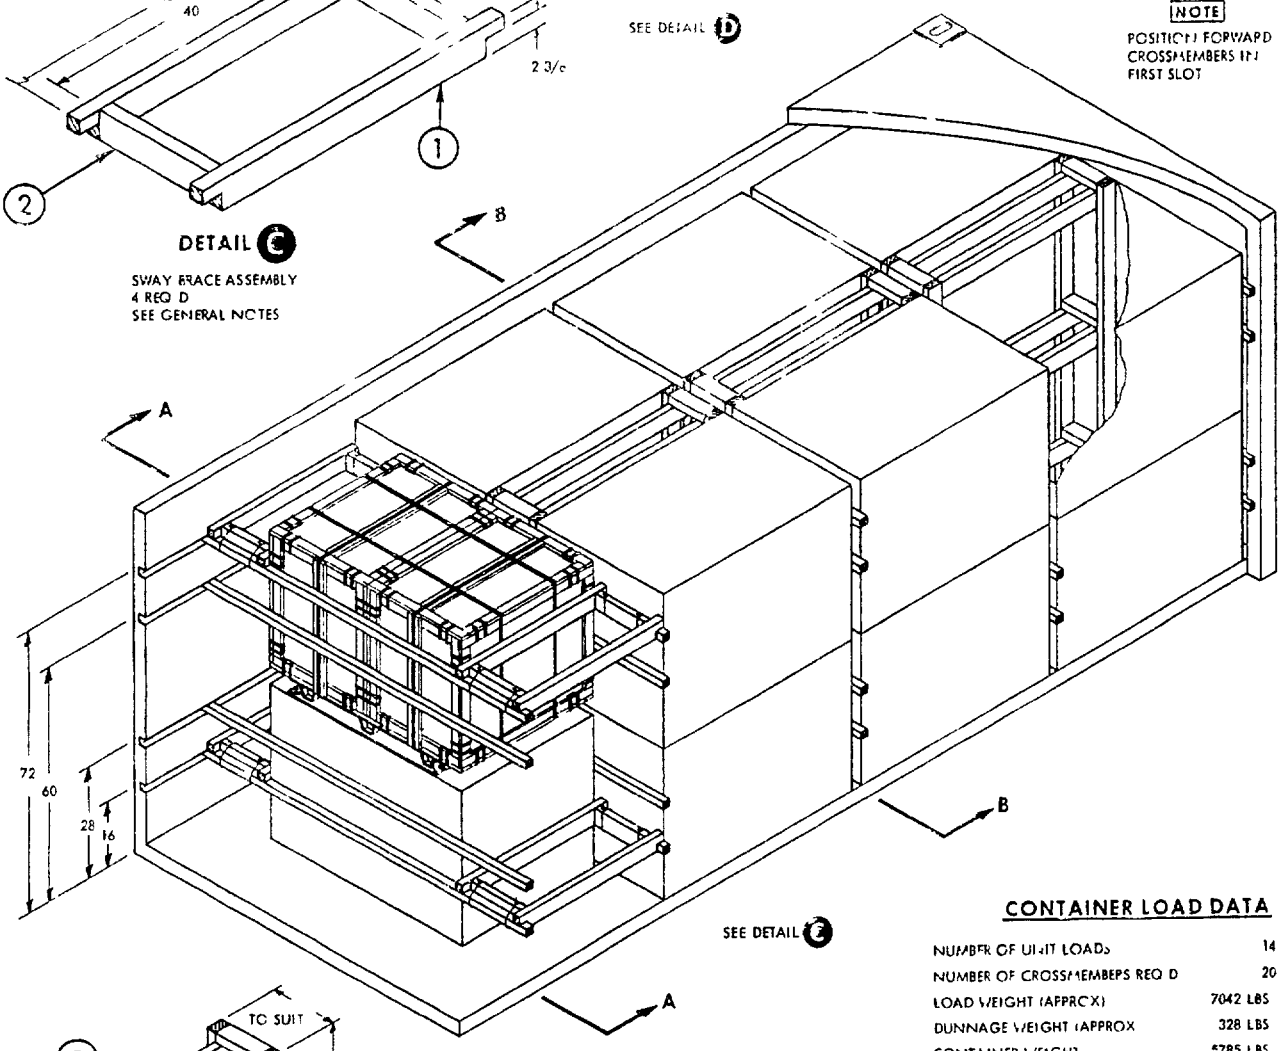

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	14
NUMBER OF CROSSMEMBERS REQ'D	20
LOAD WEIGHT (APPROX)	7042 LBS
DUNNAGE WEIGHT (APPROX	328 LBS
CONTAINER WEIGHT	5785 LBS
GROSS WEIGHT (APPROX)	13155 LBS

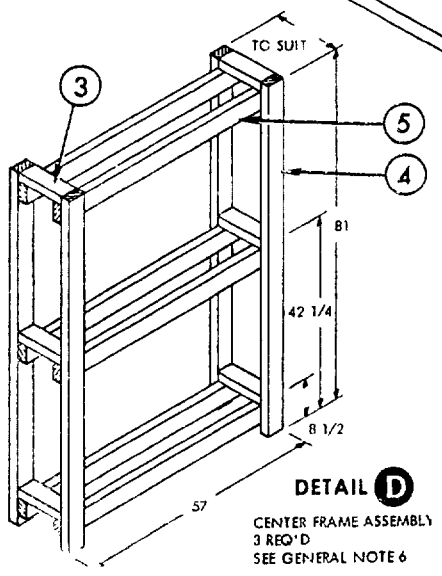

DETAIL D

CENTER FRAME ASSEMBLY
3 REQ'D
SEE GENERAL NOTE 6

PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER	SIZE
					NAILS	
5	HORIZONTAL	2 X 4 X 5'	16	4	3/JOINT	10d
4	VERTICAL	2 X 4 X 81	12	SEE 5	-	-
3	SPREADER	2 X 4 X TO SUIT	16	5	2/JOINT	12d
2	STRUT	2 X 6 X TO SUIT	6	-	-	-
1	STRINGER	2 X 6 X 46	6	2	3/JOINT	6d

LIST OF MATERIALS & NAILING DATA

REVIEW ACTIVITY
NAVY - OS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO. 8110-N-702)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:14Z
Check the source to verify that this is the current version before use.