MIL STD 1325-B
(Navy)
11 May 72


# MILITARY STANDARD

## LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

### FIN ASSY MAU-93/B FOR MK 82 BOMB AIR FORCE UNIT LOAD

**UNIT LOAD DATA**

| | |
|---|---|
| UNIT LOAD DRAWING | TPO 1325-Box-1175 |
| WEIGHT | 960 LBS |
| DIMENSIONS | 79 L x 43 W x 31-5/8 H |
| CUBE | 61.9 CU FT |
| DOT HAZARD CLASSIFICATION | INERT |
| COAST GUARD CLASS | NONE |

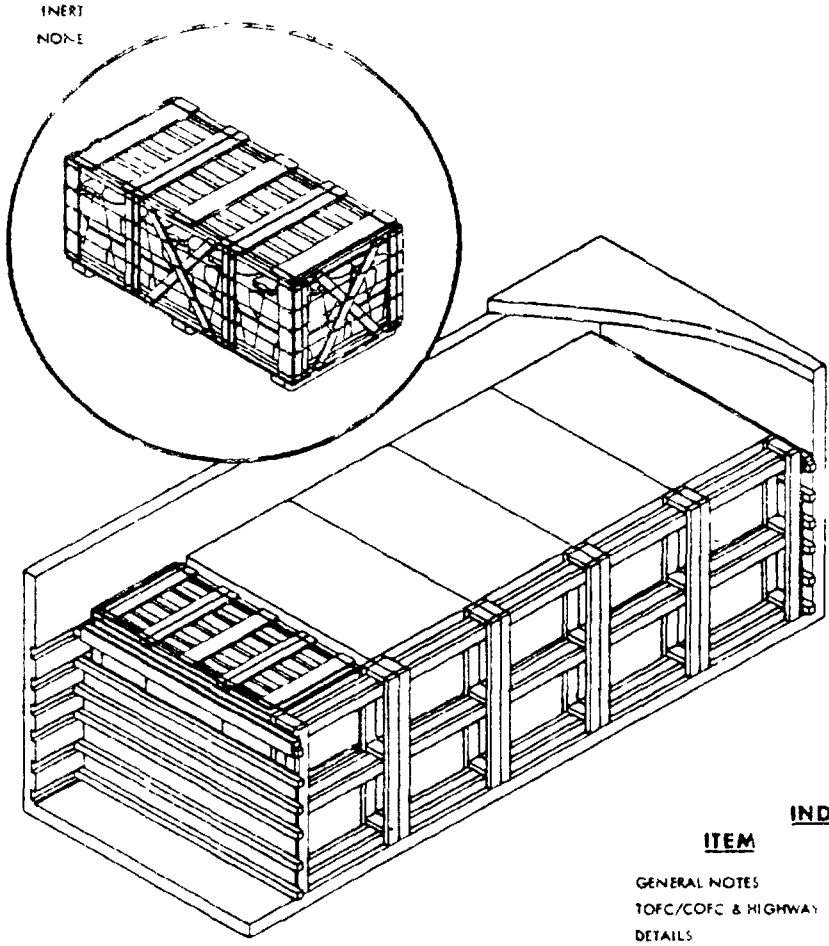

**INDEX**


| ITEM | PAGE |
|---|---|
| GENERAL NOTES | 2 |
| TOFC/COFC & HIGHWAY | 2 & 3 |
| DETAILS | 4 |


NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING TRUCKLOADING AND CARLOADING MILITARY STANDARDS REFER TO COMPREHENSIVE INDEX NWHL NO 4200

**AUTHORIZED FOR CONTAINERSHIP, TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC) AND HIGHWAY SHIPMENTS**

SIGNATURE — TECHNICAL DIRECTION AGENT (NDA) — DATE

SIGNATURE — (AIR) NAVSCOM BY DIRECTION — DATE

ORIGINATOR — SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE, NEW JERSEY

PAGE 1 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

# GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH AIR FORCE UNIT LOADS OF MK 82 MAL 82 E 20 AB FIN ASSEMBLIES. THE FINS SHALL BE PALLETIZED IN ACCORDANCE WITH TPO 1325-866-1175.
2. THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS:
   - A. ONE CONTAINER ON 20-FT MILVAN CHASSIS WITH A DOUBLE BOGIE LOCATED IN THE NEXT TO LAST HOLE AND PULLED BY A SINGLE DRIVE AXLE TRACTOR.
   - B. TWO CONTAINERS ON A 40-FT MILVAN CHASSIS WITH TWO BOGIES LOCATED IN THE REARMOST POSITION AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR.
3. THE LOADED CONTAINER MAY ALSO BE TRANSPORTED OVER PUBLIC HIGHWAYS USING SUITABLE COMMERCIAL EQUIPMENT OF ADEQUATE CAPACITY AND PULLED BY A DOUBLE DRIVE AXLE TRACTOR. CONTAINERS MUST BE ADEQUATELY SECURED TO THE EQUIPMENT.
4. THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC. WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED:
   - A. ONE CONTAINER ON 20-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.
   - B. TWO CONTAINERS ON 40-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES.

**WARNING**


CHASSIS/CONTAINERS COUPLED INTO A 40-FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC RAILCAR. THE REAR END OF THE 40-FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END. 20-FT AND 40-FT UNITS CAN BE LOADED ON THE SAME CAR.

5. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C AND SHIPPED ON FLATCARS THAT MEET THE REQUIREMENTS OF PAMPHLET 6C.
6. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72" AND 83" HEIGHTS FROM THE CONTAINER FLOOR.
7. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT.


**CAUTION**

WHEN POSITIONING CROSSMEMBERS MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.

8. THE DUNNAGE SPECIFIED IS OF NOMINAL SIZE. FOR EXAMPLE, 1 x 4 MATERIAL IS ACTUALLY 3/4 THICK BY 3 5/8 WIDE AND 2 x 6 MATERIAL IS ACTUALLY 1 5/8 THICK BY 5 1/2 WIDE.
9. WHEN THE VOID BETWEEN THE CROSSMEMBER AND THE PLYWOOD SEPARATOR IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND PLYWOOD AS SHOWN IN DETAIL E, PAGE 4.
10. APPLICABLE MATERIAL SPECIFICATIONS:
    DUNNAGE LUMBER - FED SPEC MM-L-751. PLYWOOD, COMMERCIAL STANDARD CS45, GRADE INTERIOR C-D.
    NAILS - FED SPEC FF-N-105, COMMON CEMENT COATED.
11. SIDE FRAME ASSEMBLY, DETAIL C, MAY BE ASSEMBLED IN PLACE. LENGTH OF SPREADER, PIECE 6, SHOULD BE SUFFICIENT TO CAUSE THE ASSEMBLY TO FILL THE VOID BETWEEN THE UNIT LOAD AND THE CONTAINER SIDE WALL.
12. A SEPARATOR GATE OF DIMENSIONAL 1 x 6 LUMBER MAY BE USED AS AN ALTERNATE FOR THE PLYWOOD SEPARATOR PIECE 1 (SEE DETAIL F, PAGE 4). WHEN USING THIS GATE DO NOT USE THE FILLER ASSEMBLY, DETAIL D, ON THE 60-INCH HIGH CROSSMEMBER.
13. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA. CLOSE AND SEAL CONTAINER DOORS.

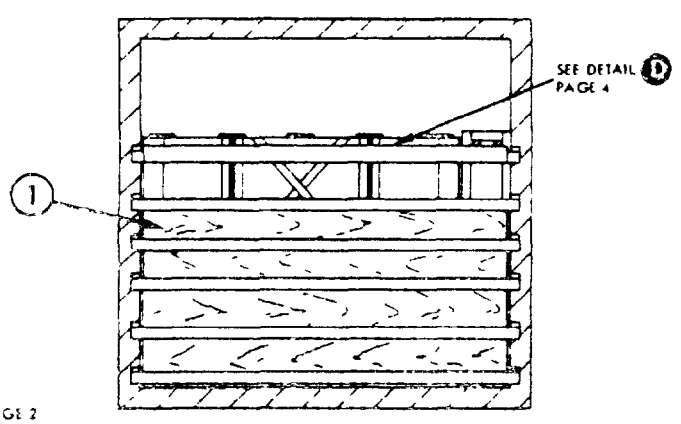



VIEW A-A

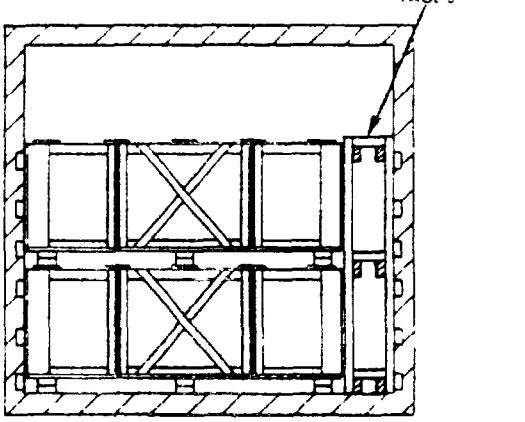


SECTION B-B




Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

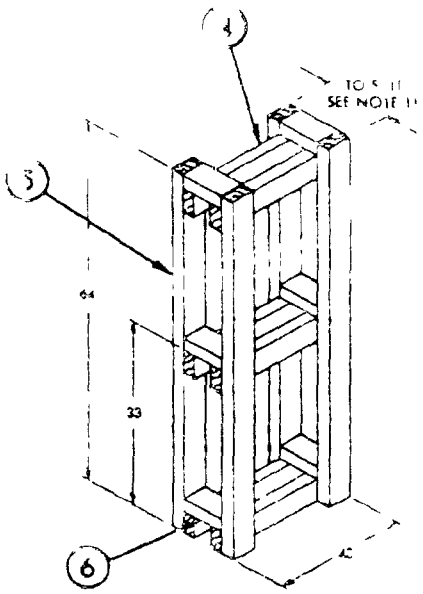


**DETAIL C**

SIDE FRAME ASSEMBLY
5 REQUIRED

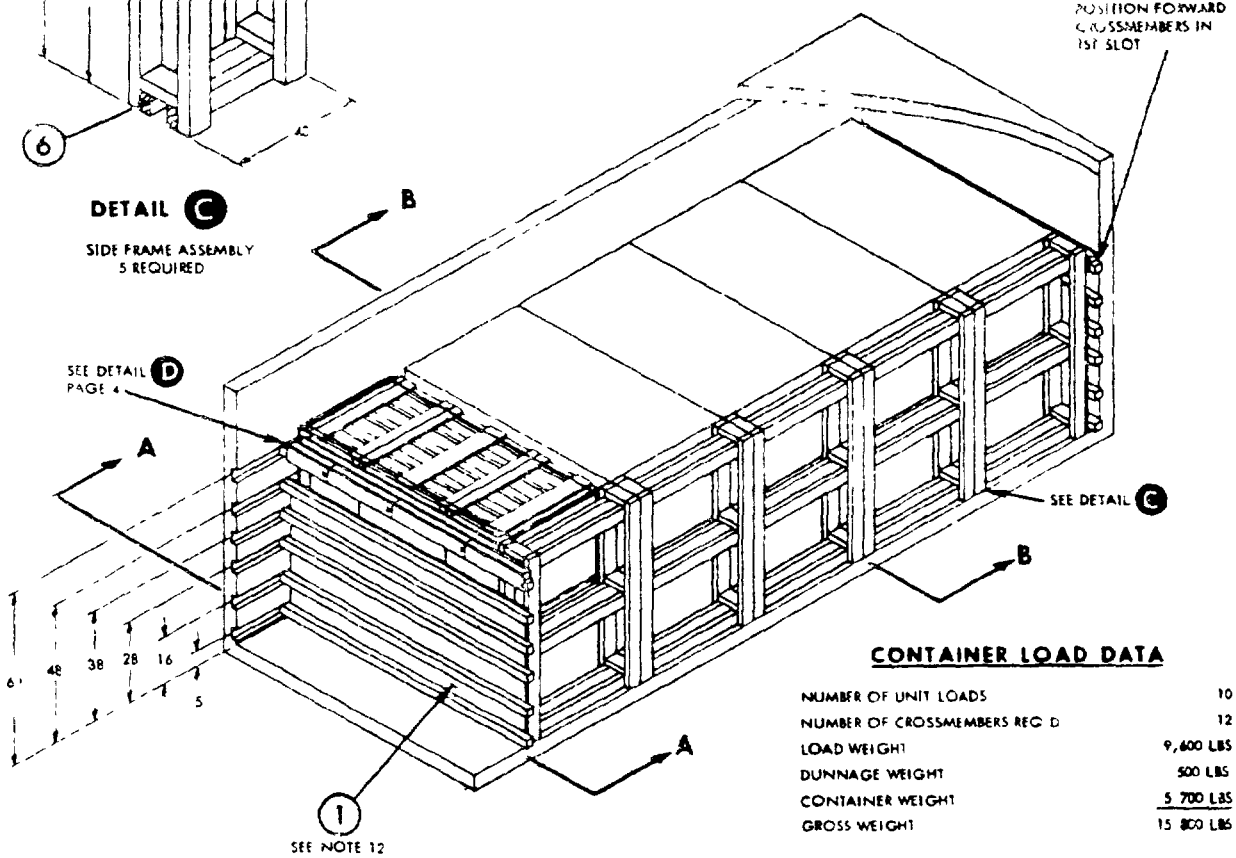


## CONTAINER LOAD DATA

| | |
|---|---|
| NUMBER OF UNIT LOADS | 10 |
| NUMBER OF CROSSMEMBERS REQ'D | 12 |
| LOAD WEIGHT | 9,600 LBS |
| DUNNAGE WEIGHT | 500 LBS |
| CONTAINER WEIGHT | 5 700 LBS |
| GROSS WEIGHT | 15 800 LBS |


* ACTUAL MEASUREMENT

| PIECE NO | DESCRIPTION | SIZE | NO OF PIECES REQ'D | NAIL TO | NUMBER NAILS | SIZE NAILS |
|---|---|---|---|---|---|---|
| 6 | SPREADER | 2 x 4 TO SUIT | 30 | 5 | 2 PER JOINT | 16d |
| 5 | VERTICAL | 2 x 4 x 64 | 20 | SEE 4 | - | - |
| 4 | HORIZONTAL | 2 x 4 x 43 | 30 | 5 | 3 PER JOINT | 10d |
| 3 | SPACER | 2 x 2 1/2* x 90 | 2 | SEE 2 | - | - |
| 2 | SHIM (PLYWOOD) | 1/2 x 4 3/4* x 90 | 4 | 3 | 6 | 10d |
| 1 | SEPARATOR (PLYWOOD) | 1/2 x 48 x 90 | 2 | SEE NOTE 12 | | |

LIST OF MATERIALS & NAILING DATA




Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

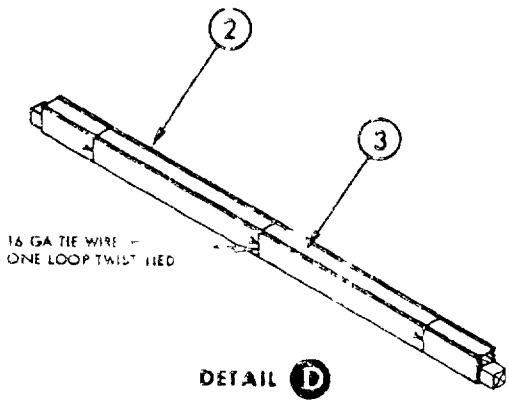



DETAIL D

FILLER ASSEMBLY
2 REQUIRED

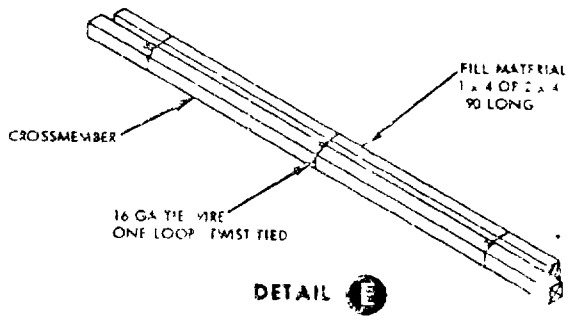


DETAIL E

FILL MATERIAL
SEE NOTE 9 PAGE 2

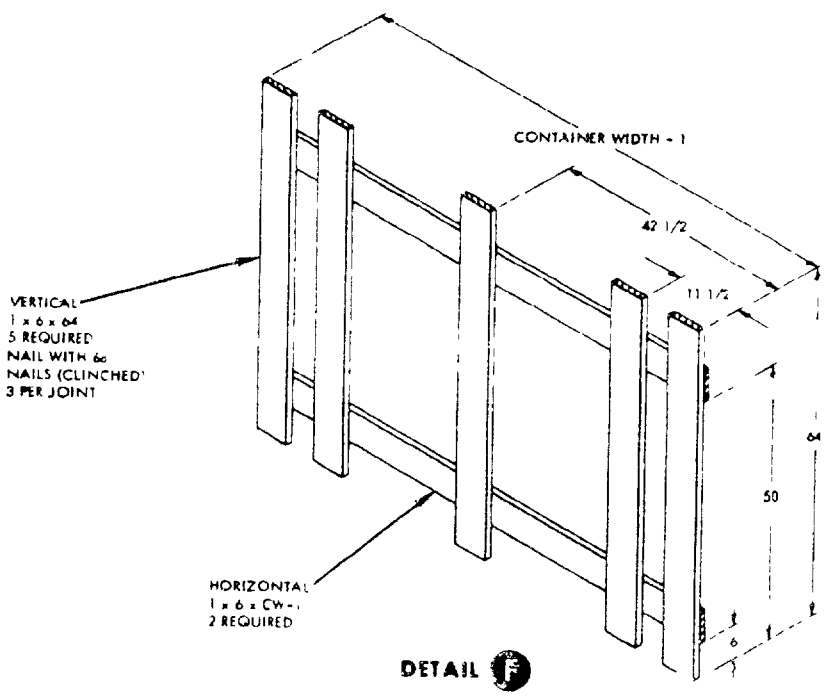


DETAIL F

ALTERNATE SEPARATOR GATE
2 REQUIRED
SEE NOTE 12 PAGE 2



Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.