MILITARY STANDARD

MIL-STD-1386-7
(NAVY)


1 MAY 1972

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

FIN ASSEMBLY, BOMB, FOR 500 LB LD BOMB
(UNCRATED)
FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54/218
WEIGHT	904 LBS
DIMENSIONS	55 1/2 L x 41 1/2 W x 32 H
CUBE	42.6 CU FT
DOT HAZARD CLASSIFICATION	INERT
CLASS GUARD CLASS	NONE

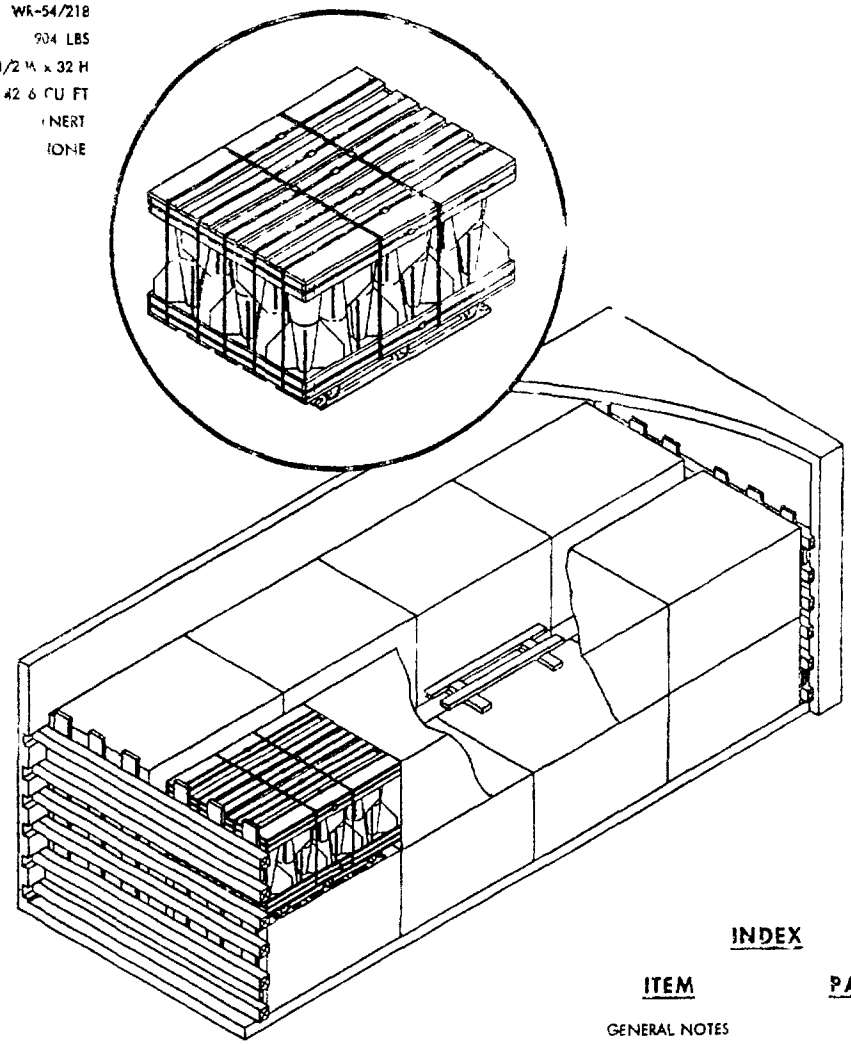

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC & HIGHWAY	2 & 3

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS REFER TO COMPREHENSIVE INDEX NWHL NO 4200

AUTHORIZED FOR TRAILER-ON-FLAT-CAR (TOFC), CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND HIGHWAY SHIPMENTS

M. S. Gray — 7/21/72
SIGNATURE — TECHNICAL DIRECTION AGENT (TDA) — DATE

J. E. Kelly — 7/26/72
SIGNATURE — (AIR)/MSCOM BY DIRECTION — DATE

ORIGINATOR — SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAVAL AMMUNITION DEPOT
CRANE, INDIANA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF 500 LB L D BOMB FIN ASSEMBLIES (UNCRATED) THE UNIT LOAD SHALL BE IN ACCORDANCE WITH WR-54/218

2 THE LOADED CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS USING THE FOLLOWING CONFIGURATIONS

A CONTAINER ON 20-FT MILVAN CHASSIS WITH A DOUBLE BOGIE LOCATED IN THE NEXT TO LAST HOLE AND PULLED BY A TRACTOR WITH A SINGLE DRIVE AXLE

B TWO CONTAINERS ON A 40-FT MILVAN CHASSIS WITH TWO BOGIES LOCATED IN THE REARMOST POSITION AND PULLED BY A TRACTOR WITH A DOUBLE DRIVE AXLE

3 THE LOADED CONTAINER MAY ALSO BE TRANSPORTED OVER PUBLIC HIGHWAYS USING COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY

4 THE LOADED CONTAINERS MAY BE SHIPPED TOFC/COFC WHEN SHIPPING TOFC THE FOLLOWING CONFIGURATIONS ARE AUTHORIZED

A CONTAINER ON 20-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES

B TWO CONTAINERS ON 40-FT MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES

WARNING

CHASSIS/CONTAINERS COUPLED INTO A 40-FT TRAILER CONFIGURATION MUST BE PLACED AT THE B-END OF THE TOFC RAILCAR THE REAR END OF THE 40-FT UNIT WILL OVERHANG THE END OF THE CAR IF IT IS PLACED AT THE A-END 20-FT AND 40-FT UNITS CAN BE LOADED ON THE SAME CAR

5 THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C AND SHIPPED ON FLATCARS THAT MEET THE REQUIREMENTS OF PAMPHLET 6C

6 IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72" AND 83" HEIGHTS FROM THE CONTAINER FLOOR

7 CONTAINERS APE EQUIPPED WITH 25 CROSSMEMBERS UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT

CAUTION

WHEN POSITIONING CROSSMEMBERS, MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE

8 THE DUNNAGE SPECIFIED IS OF NOMINAL SIZE FOR EXAMPLE, 1 x 4 MATERIAL IS ACTUALLY 3/4 THICK BY 3 5/8 WIDE AND 2 x 6 MATERIAL IS ACTUALLY 1 5/8 THICK BY 5 1/2 WIDE

9 WHEN THE VOID BETWEEN THE CROSSMEMBER AND THE SEPARATOR GATE IS GREATER THAN ONE INCH USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND LOAD AS SHOWN IN DETAIL D


10 APPLICABLE MATERIAL SPECIFICATIONS

DUNNAGE LUMBER - FED SPEC MM-L-751


NAILS - FED SPEC FF-N-105, COMMON CEMENT COATED

11 SWAY BRACE, DETAIL C, IS ASSEMBLED IN PLACE INSERT SUPPORTS, PIECE 3, IN FORK POCKETS WITH PIECE 5 AGAINST PALLET POST, NAIL TO PIECE 3 WITH THREE 10d NAILS CUT PIECE 4 TO FIT BETWEEN PIECES 5 AND NAIL TO PIECE 3 WITH THREE 10d NAILS

12 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA, CLOSE AND SEAL CONTAINER DOORS

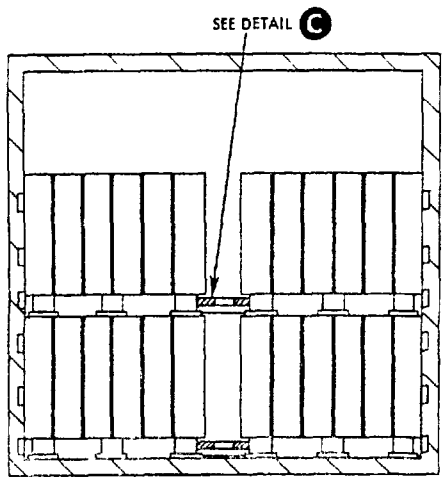


SECTION A-A

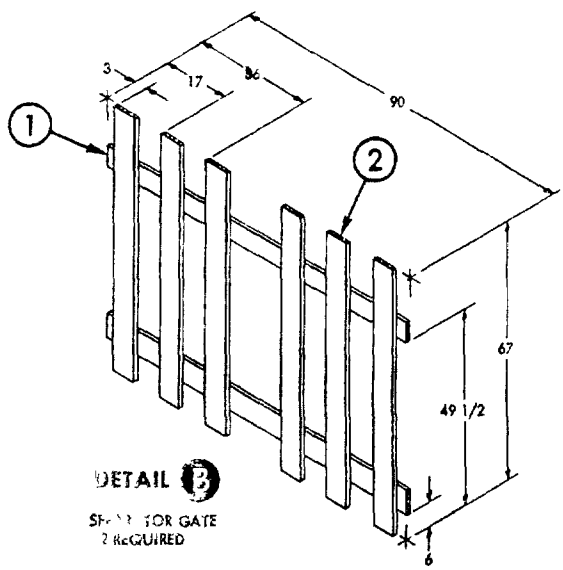

DETAIL B


SHOWN FOR GATE
2 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

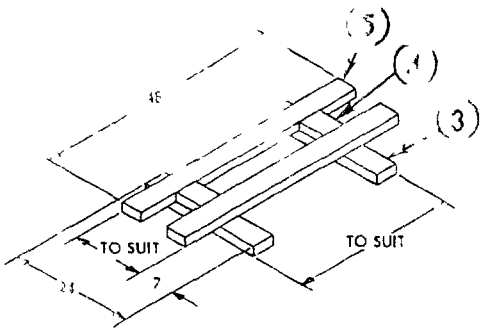

DETAIL C

SWAY BRACE
8 REQ'D
TO BE ASSEMBLED IN PLACE
SEE NOTE 11

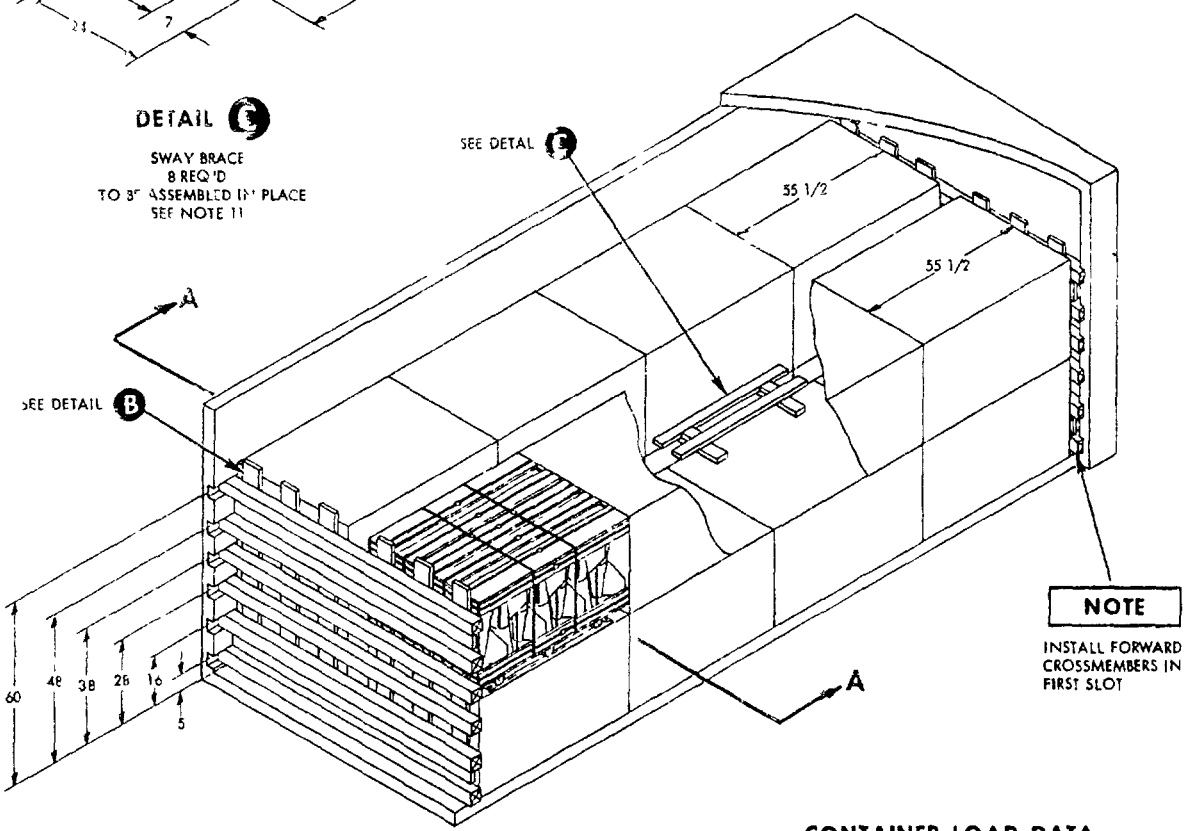


NOTE

INSTALL FORWARD CROSSMEMBERS IN FIRST SLOT

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	16
NUMBER OF CROSSMEMBERS REQ'D	12
LOAD WEIGHT	14,464 LBS
DUNNAGE WEIGHT	500 LBS
CONTAINER WEIGHT	5,700 LBS
GROSS WEIGHT	20,664 LBS

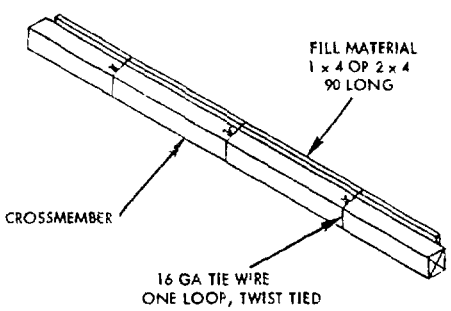

DETAIL D

FILL MATERIAL
SEE NOTE 9

*= CLINCHED

PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE
5	STRINGER	2 x 4 x 48	16	3	3/JOINT	10d
4	SPACER	2 x 4 TO SUIT	16	3	3	10d
3	SUPPORT	2 x 4 x 24	16	SEE 4 & 5	-	-
2	VERTICAL	1 x 6 x 67	12	1	3/JOINT	*6d
1	HORIZONTAL	1 x 6 x 90	4	SEE 2	-	-

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.