MILITARY STANDARD

MIL-STD-1386-B (Navy)


18 AUGUST 1972

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

FUZE, BOMB, M904 OR M990 TYPE FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54/122 OR WR-54/87
WEIGHT	1010 LBS
DIMENSIONS	46 1/8 L x 37 1/8 W x 34 H
CUBE	33.6 CU FT
DOT HAZARD CLASSIFICATION	EXPLOSIVES A
COAST GUARD CLASS	VI

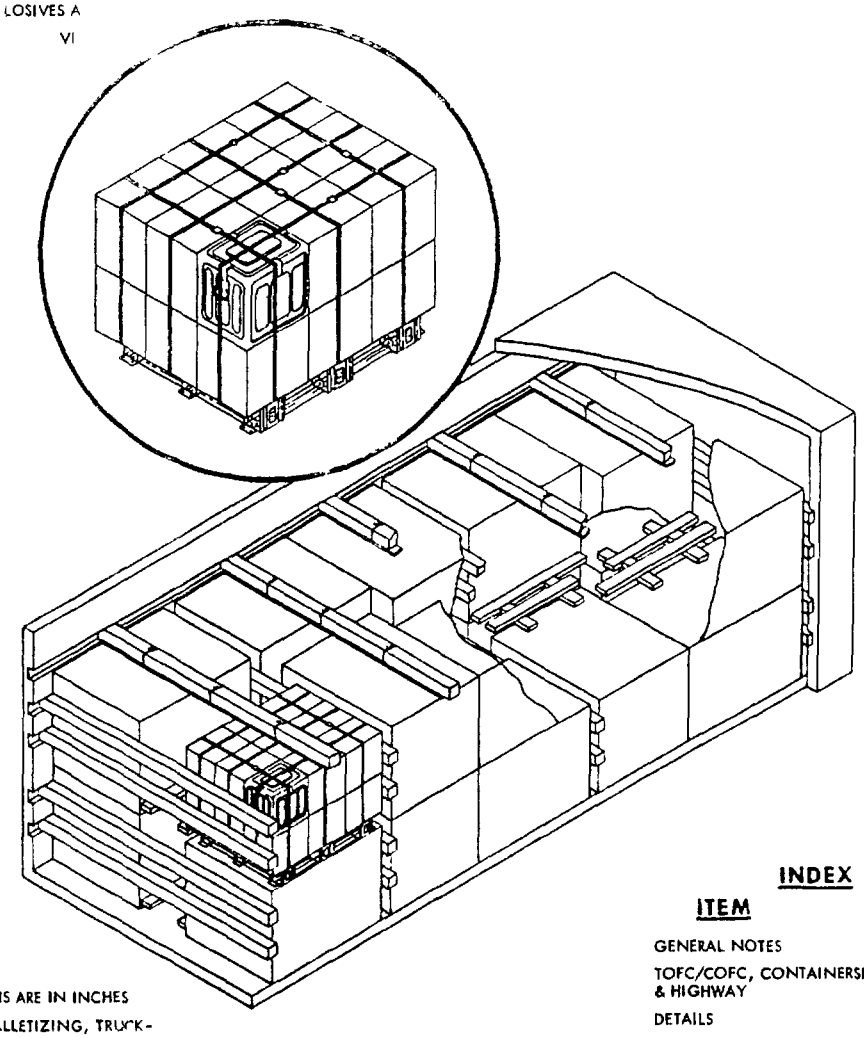

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCK-LOADING AND CARLOADING MILITARY STANDARDS, REFER TO COMPREHENSIVE INDEX NWHL NO 4200

INDEX

ITEM	PAGE
GENERAL NOTES	2
TOFC/COFC, CONTAINERSHIP & HIGHWAY	2,3
DETAILS	4

AUTHORIZED FOR CONTAINERSHIP, TOFC/COFC AND HIGHWAY SHIPMENTS

SIGNATURE — TECHNICAL DIRECTION AGENT — DATE 8/1/72

APPROVED BY US COAST GUARD

R.S. Chuning Capt USCG

DATE 7-19-72

APPROVED BY BUREAU OF EXPLOSIVES

A F Grossmuck

DATE 7/25/72

ORIGINATOR L R Caungi

SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

THIS DOCUMENT GIVES DETAILED PROCEDURES FOR LOADING THE MILVAN CONTAINER WITH FIRST ISSUE UNIT LOADS OF EITHER M904 OR M990 TYPE BOMB FUZES. THE UNIT LOADS SHALL BE IN ACCORDANCE WITH EITHER WP-54/122 OR WP-54/87, AS APPROPRIATE.

2. LOADED MILVAN CONTAINERS MUST BE ON 20 FT MILVAN CHASSIS EQUIPPED WITH TWO BOGIE ASSEMBLIES WHEN BEING MOVED IN TOFC SERVICE.

THE LOADED MILVAN CONTAINER MAY BE TRANSPORTED OVER PUBLIC HIGHWAYS ON THE MILVAN CHASSIS IN THE FOLLOWING CONFIGURATIONS:

A. CONTAINER ON 20-FT MILVAN CHASSIS WITH A DOUBLE BOGIE LOCATED IN THE REARMOST POSITION AND PULLED BY A DOUBLE AXLE TRACTOR.

B. CONTAINER ON COMMERCIAL EQUIPMENT OF APPROPIATE CAPACITY.

4. THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C AND SHIPPED ON FLATCARS THAT MEET THE REQUIREMENTS OF PAMPHLET 6C.

5. IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72" AND 83" HEIGHTS FROM THE CONTAINER FLOOR.

6. CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS. UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINER AND SHALL BE FASTENED INTO BELT RAILS FOR SHIPMENT.

CAUTION

WHEN POSITIONING CROSSMEMBERS, MAKE A VISUAL CHECK TO ENSURE THAT CROSSMEMBERS ARE LOCKED SECURELY IN PLACE.

7. THE DUNNAGE SPECIFIED IS OF NOMINAL SIZE. FOR EXAMPLE, 1 x 4 MATERIAL IS ACTUALLY 3/4 THICK BY 3 5/8 WIDE AND 2 x 6 MATERIAL IS ACTUALLY 1 5/8 THICK BY 5 1/2 WIDE.

8. WHEN THE VOID BETWEEN THE CROSSMEMBER AND THE UNIT LOAD IS GREATER THAN ONE INCH USE FILL MATERIAL TO SHIM BETWEEN CROSSMEMBER AND LOAD AS SHOWN IN DETAIL E, PAGE 4.

9. SHIM, PIECE 5, IS THICKNESS TO SUIT AND MAY BE ADDED TO OR OMITTED AS REQUIRED TO SECURE LADING.

10. APPLICABLE MATERIAL SPECIFICATIONS:


DUNNAGE LUMBER - FED. SPEC. MM-L-751

NAILS - FED. SPEC. FF-N-105, COMMON CEMENT-COATED


11. SWAY BRACES, DETAILS C AND D, ARE ASSEMBLED IN PLACE. INSERT SUPPORTS IN FORK POCKETS AND WITH STRINGERS AGAINST PALLET POSTS, NAIL TO SUPPORTS WITH THREE 10d NAILS. CUT SPACER TO FIT BETWEEN STRINGERS AND NAIL TO SUPPORTS WITH THREE 10d NAILS.

12. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA, CLOSE AND SEAL CONTAINER DOORS, AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF THE CONTAINER FOR THE APPROPRIATE MODE OF TRANSPORTATION AS PRESCRIBED IN OP 2165 (VOL. 1).

TOFC/COFC, CONTAINERSHIP AND HIGHWAY

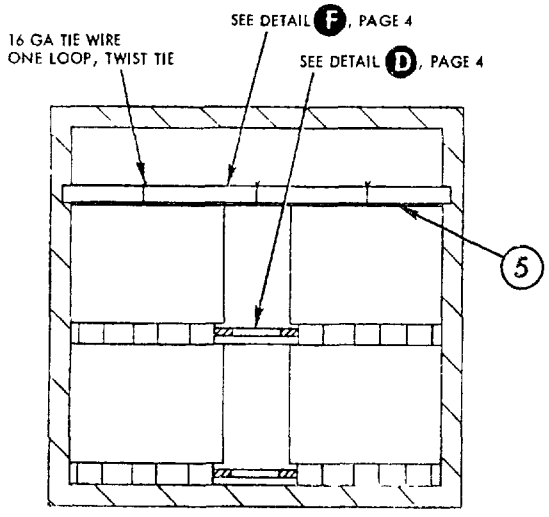

SECTION A-A

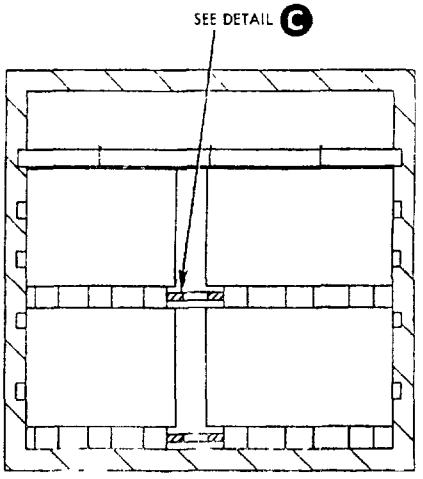



SECTION B-B

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

UNIT LOAD DATA

NUMBER OF UNIT LOADS	20
NUMBER OF CROSSMEMBERS REQ'D	21
LOAD WEIGHT	20,200 LBS
DUNNAGE WEIGHT	234 LBS
CONTAINER TARE WEIGHT	5,700 LBS
GROSS WEIGHT	26,134 LBS

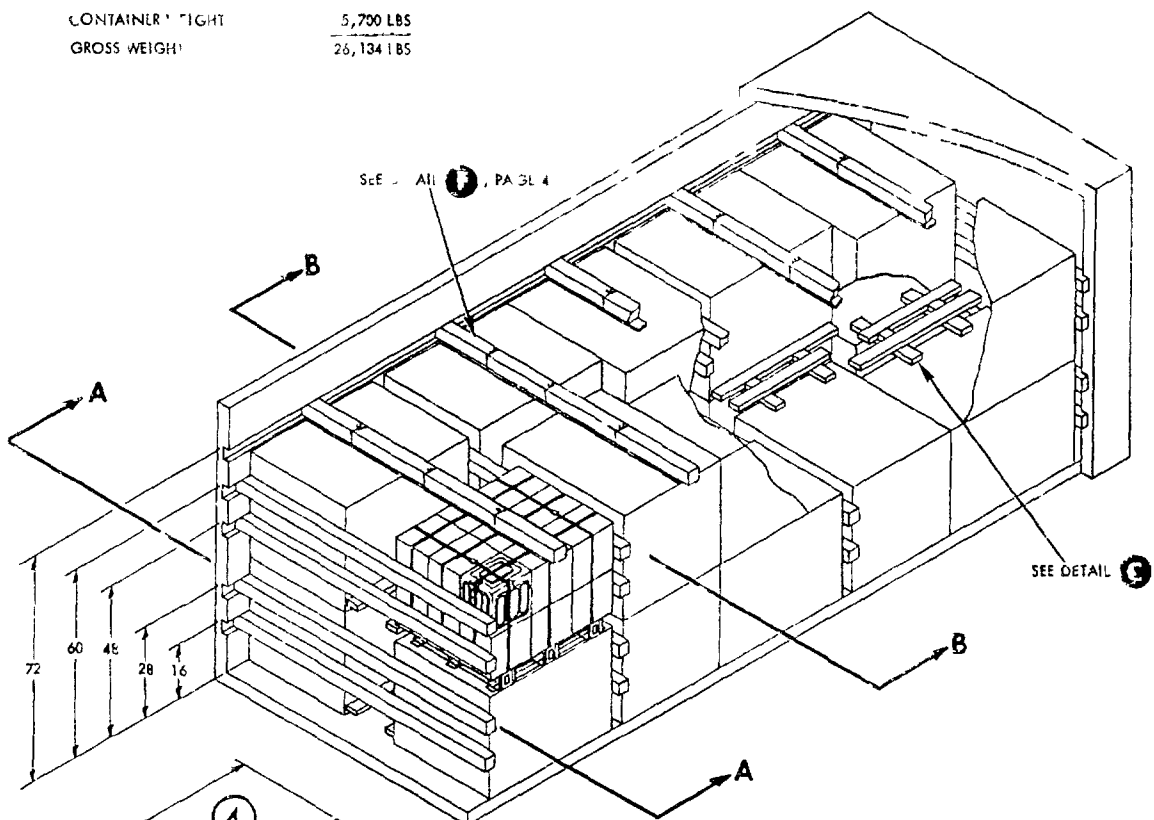

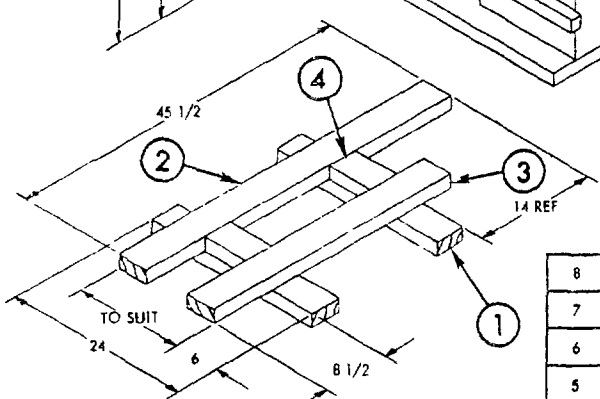


DETAIL C

SWAY BRACE ASSEMBLY
8 REQUIRED

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
8	SPACER	2 x 4 TO SUIT	4	6	3	10d
7	STRINGER	2 x 4 x 45 1/2	4	6	3 PER JOINT	10d
6	SUPPORT	2 x 4 x 31	4	SEE 7	-	-
5	SHIM	4 WIDE x 90 THICKNESS TO SUIT	5	SEE GENERAL NOTE 9		
4	SPACER	2 x 4 TO SUIT	16	1	3	10d
3	STRINGER	2 x 4 x 35	8	1	3 PER JOINT	10d
2	STRINGER	2 x 4 x 45 1/2	8	1	3 PER JOINT	10d
1	SUPPORT	2 x 4 x 24	16	SEE 2	-	-


LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.

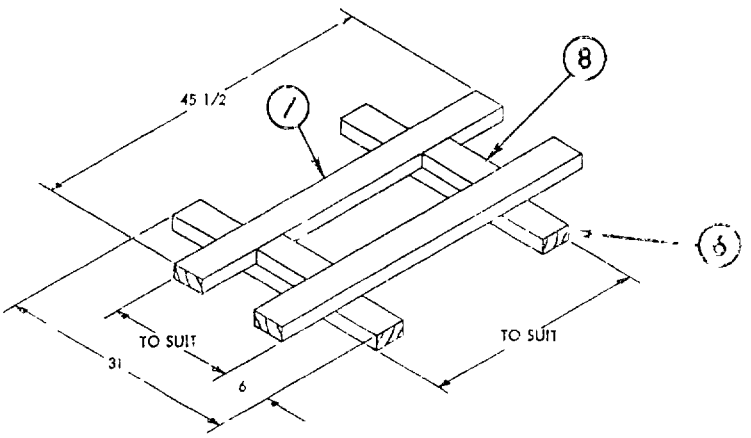


DETAIL D

SWAY BRACE ASSEMBLY
2 REQUIRED

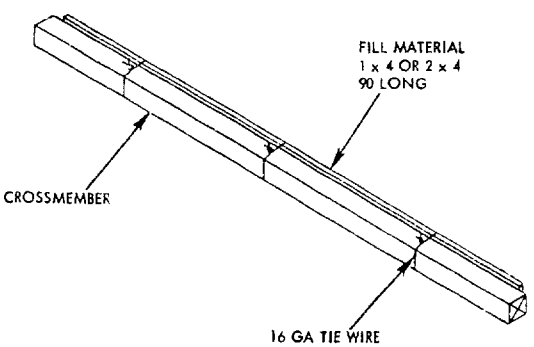

DETAIL E

FILL MATERIAL
SEE GENERAL NOTE 8

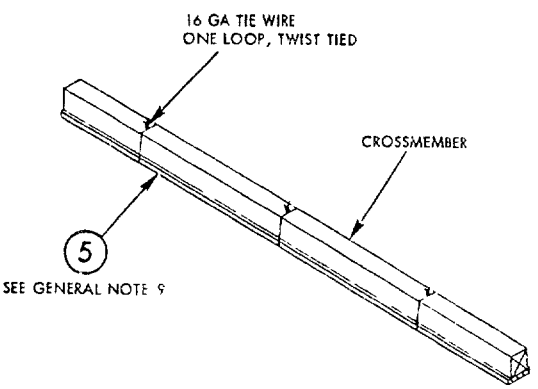

DETAIL F

HOLD DOWN
5 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:11Z
Check the source to verify that this is the current version before use.