METRIC


DOD-P-63477/5A
23 February 1984
SUPERSEDING
DOD-P-63477/5
29 May 1981

MILITARY SPECIFICATION SHEET

PIN, SPRING, TUBULAR, COILED, STANDARD DUTY, CARBON STEEL, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the pins described herein shall consist of this specification and the latest issue of DOD-P-63477.

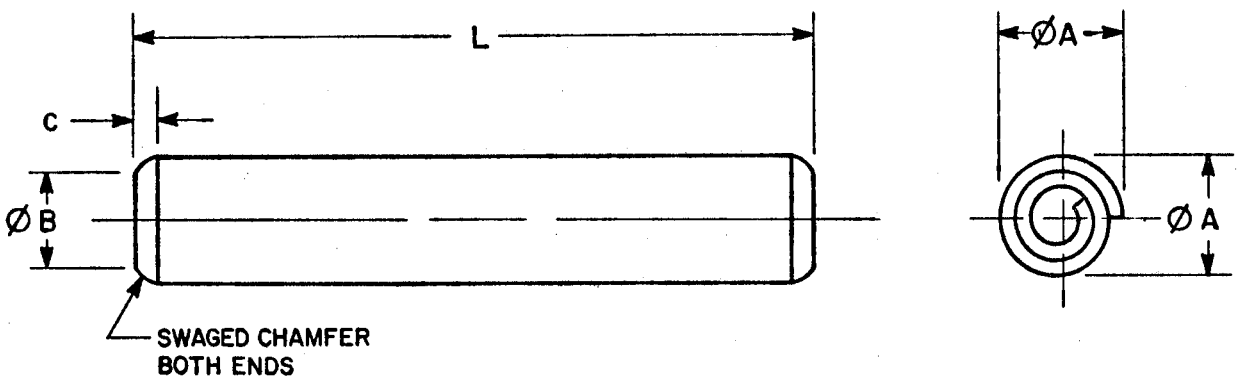

NOTES:

1. All dimensions are in millimeters.

FIGURE 1. PIN, SPRING, TUBULAR, COILED, STANDARD DUTY, CARBON STEEL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

FSC 5315


REQUIREMENTS:

1. Material: Carbon steel, compositions 1070 thru 1095 (UNS G10700 thru UNS G10950).

2. Protective finish: Cadmium plating; Phosphate coating; Zinc coating.

3. Part number: The part number consists of the letter "D", the basic number of this specification sheet, followed by a dash number taken from Table I and a finish code letter, "C" for Cadmium plating, "P" for Phosphate coating and "Z" for Zinc coating.

EXAMPLE: D63477/5-177C

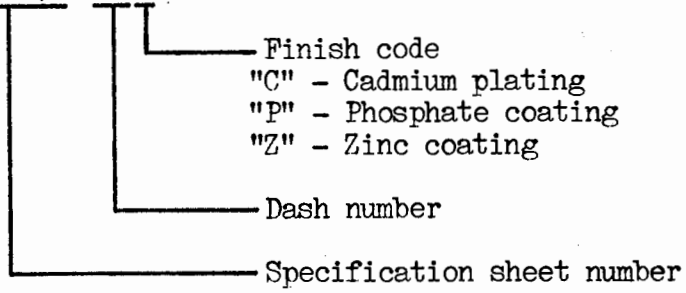

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.

NOMINAL SIZE		0.8	1	1.2	1.5	2	2.5	3	4	5	6	8	10	12	14	16	20
ØA	MAX	0.91	1.15	1.35	1.73	2.25	2.78	3.30	4.40	5.45	6.50	8.63	10.75	12.85	14.95	17.00	21.10
	MIN	0.85	1.05	1.25	1.62	2.13	2.65	3.15	4.20	5.20	6.25	8.30	10.35	12.40	14.45	16.45	20.45
ØB CHAMFER	MAX	0.75	0.95	1.15	1.40	1.90	2.40	2.90	3.90	4.85	5.85	7.80	9.75	11.70	13.60	15.60	19.60
C CHAMFER LENGTH	REF	0.3	0.3	0.4	0.5	0.7	0.7	0.9	1.1	1.3	1.5	2.0	2.5	3.0	3.5	4.0	4.5
RECOMMENDED HOLE SIZE	MAX	0.84	1.04	1.24	1.60	2.10	2.60	3.10	4.12	5.12	6.12	8.15	10.15	12.18	14.18	16.18	20.21
	MIN	0.80	1.00	1.20	1.50	2.00	2.50	3.00	4.00	5.00	6.00	8.00	10.00	12.00	14.00	16.00	20.00
MIN DOUBLE SHEAR FORCE (kN)		0.33	0.53	0.76	1.20	2.10	3.10	5.00	8.90	14.20	20.00	35.00	58.00	73.90	109.00	138.00	227.00

L - LENGTH	TOL	DASH NUMBERS															
4	+0.5 0	3	43	83	123	163											
6	+0.5 0	4	44	84	124	164	204	244									
8	+0.5 0	5	45	85	125	165	205	245	285								
10	+0.5 0	6	46	86	126	166	206	246	286	326							
12	+1.0 0	7	47	87	127	167	207	247	287	327	367						
14	+1.0 0	8	48	88	128	168	208	248	288	328	368						
16	+1.0 0	9	49	89	129	169	209	249	289	329	369	409					
18	+1.0 0				130	170	210	250	290	330	370	410					
20	+1.0 0				131	171	211	251	291	331	371	411	451				
22	+1.0 0				132	172	212	252	292	332	372	412	452				
24	+1.0 0				133	173	213	253	293	333	373	413	453				
26	+1.0 0				134	174	214	254	294	334	374	414	454	494			
28	+1.0 0					175	215	255	295	335	375	415	455	495			
30	+1.0 0					176	216	256	296	336	376	416	456	496	536	576	616
32	+1.0 0					177	217	257	297	337	377	417	457	497	537	577	617
36	+1.0 0					178	218	258	298	338	378	418	458	498	538	578	618
40	+1.0 0					179	219	259	299	339	379	419	459	499	539	579	619

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS. - CONTINUED

NOMINAL SIZE		0.8	1	1.2	1.5	2	2.5	3	4	5	6	8	10	12	14	16	20
ØA	MAX	0.91	1.15	1.35	1.73	2.25	2.78	3.30	4.40	5.45	6.50	8.63	10.75	12.85	14.95	17.00	21.10
	MIN	0.85	1.05	1.25	1.62	2.13	2.65	3.15	4.20	5.20	6.25	8.30	10.35	12.40	14.45	16.45	20.45
ØB CHAMFER	MAX	0.75	0.95	1.15	1.40	1.90	2.40	2.90	3.90	4.85	5.85	7.80	9.75	11.70	13.60	15.60	19.60
C CHAMFER LENGTH	REF	0.3	0.3	0.4	0.5	0.7	0.7	0.9	1.1	1.3	1.5	2.0	2.5	3.0	3.5	4.0	4.5
RECOMMENDED HOLE SIZE	MAX	0.84	1.04	1.24	1.60	2.10	2.60	3.10	4.12	5.12	6.12	8.15	10.15	12.18	14.18	16.18	20.21
	MIN	0.80	1.00	1.20	1.50	2.00	2.50	3.00	4.00	5.00	6.00	8.00	10.00	12.00	14.00	16.00	20.00
MIN DOUBLE SHEAR FORCE (kN)		0.33	0.53	0.76	1.20	2.10	3.10	5.00	8.90	14.20	20.00	35.00	58.00	73.90	109.00	138.00	227.00

L - LENGTH	TOL	DASH NUMBERS															
45	+1.0 0						220	260	300	340	380	420	460	500	540	580	620
50	+1.0 0							261	301	341	381	421	461	501	541	581	621
55	+1.0 0								302	342	382	422	462	502	542	582	622
60	+1.0 0								303	343	383	423	463	503	543	583	623
65	+1.0 0										384	424	464	504	544	584	624
70	+1.0 0										385	425	465	505	545	585	625
75	+1.5 0										386	426	466	506	546	586	626
80	+1.5 0											427	467	507	547	587	627
85	+1.5 0											428	468	508	548	588	628
90	+1.5 0											429	469	509	549	589	629
95	+1.5 0											430	470	510	550	590	630
100	+1.5 0											431	471	511	551	591	631
110	+1.5 0												472	512	552	592	632
120	+1.5 0												473	513	553	593	633
130	+1.5 0															594	634
140	+1.5 0															595	635
150	+1.5 0															596	636
160	+1.5 0															597	637

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - ER, MI
DLA - IS
NSA - NS

User activities:
Army - AV, CE, ME
Navy - MC, YD

Agent:
DLA - IS

Preparing activity:
Army - AR

(Project 5315-0381)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.