INCH-POUND

MIL-C-81511/15F
15 NOVEMBER 1992
SUPERSEDING
MIL-C-81511/15E
5 June 1970

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING; AND ACCESSORIES: PLUG, SEALING CONTACT (SERIES 1 OR 2)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

(F) The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-81511.

Inactive for new design after 30 April 1976.

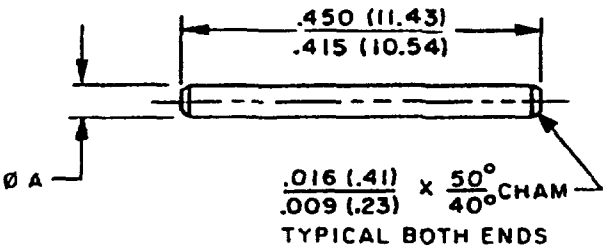


TABLE I. Sealing contacts.

Part Number	Contact size (reference)	ØA	Color	Approx weight in lbs
M81511/15-22	23-22	.050(1.27)/.045(1.14)	White	.000046
M81511/15-20	20-20	.070(1.78)/.065(1.65)	Red	.000093
M81511/15-16	16-16	.095(2.41)/.090(2.29)	Blue	.000174
(F) M81511/15-12	12-12	.145(3.68)/.140(3.56)	Yellow	.000556

(F) Denotes changes

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-23T05:33Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Plugs are used with unwired contacts in connectors conforming to MIL-C-81511.

REQUIREMENTS:

Material - Polytetrafluoroethylene.

Custodians:
Army - CR
Air Force - 85
(F) Navy - AS

Preparing activity:
Navy - AS

(Project 5935-3876)

Review activities:
Army - MI, AV, AR
Navy - SH, EC, OS
DLA - ES

User activities:
Army - ME, AT
Navy - MC

Source: https://assist.dla.mil -- Downloaded: 202610-23T05:33Z
Check the source to verify that this is the current version before use.