
MIL-C-81511/18C
5 June 1970
SUPERSEDING
MIL-C-81511/18B (NAVY)
23 September 1969

MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING; AND ACCESSORIES: COVER, PROTECTIVE, RECEPTACLE (SERIES 1 OR 2)

The complete requirements for procuring the receptacle cap described herein shall consist of this document and the latest issue of Specification MIL-C-81511.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

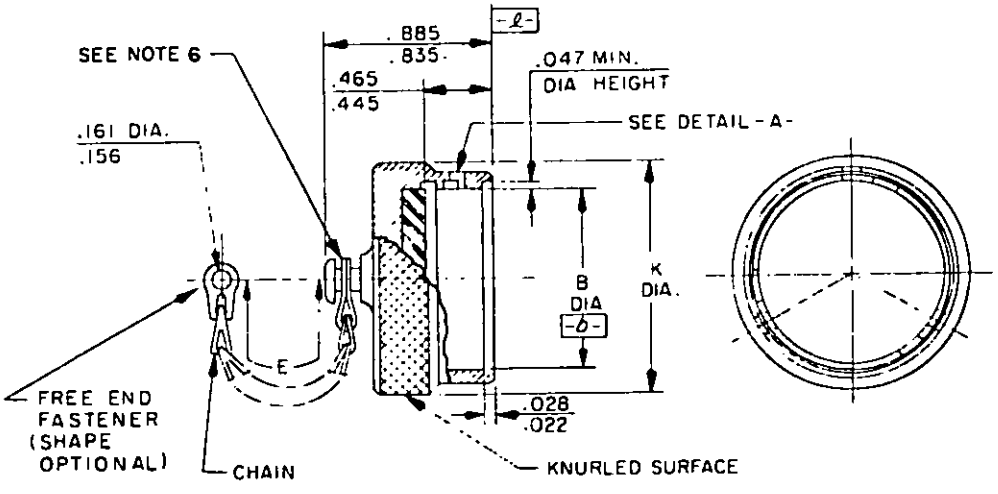

INCHES	MM
.006	.15
.022	.56
.028	.71
.047	1.19
.094	2.39
.100	2.54
.112	2.84
.125	3.18
.156	3.96
.161	4.09
.206	5.23
.211	5.36
.215	5.46
.220	5.59
.445	11.30
.465	11.81
.835	21.21
.885	22.48

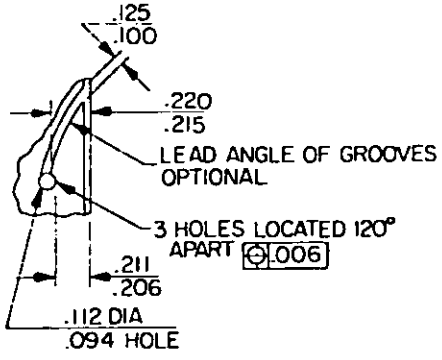

DETAIL - A -

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

Part number	Shell size	B dia	K dia	Approx weight in lbs	E ± one link
M81511/18-08 (Series 1 or 2)	8	.566 (14.38) .558 (14.17)	.844 (21.44) .830 (21.08)	.023	3.0
M81511/18-10 (Series 1 or 2)	10	.691 (17.55) .683 (17.35)	.969 (24.61) .955 (24.26)	.027	3.0
M81511/18-14 (Series 1 or 2)	14	.941 (23.90) .933 (23.70)	1.219 (30.96) 1.205 (30.61)	.038	3.5
M81511/18-16 (Series 1 or 2)	16	1.068 (27.13) 1.060 (26.92)	1.345 (34.16) 1.331 (33.81)	.043	3.5
M81511/18-18 (Series 1 or 2)	18	1.191 (30.25) 1.183 (30.05)	1.469 (37.31) 1.455 (36.96)	.050	3.5
M81511/18-20 (Series 1)	20	1.316 (33.43) 1.308 (33.22)	1.594 (40.49) 1.580 (40.13)	.057	3.5
M81511/18-22 (Series 1)	22	1.441 (36.60) 1.433 (36.40)	1.719 (43.66) 1.705 (43.31)	.065	3.5
M81511/18-24 (Series 1)	24	1.566 (39.78) 1.558 (39.57)	1.844 (46.84) 1.830 (46.48)	.074	3.5

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Dimensions are after plating.
5. This cap mates with type MIL-C-81511/1, /2, /3, /4, /5, /21, /22, /23, /24, /25, /27, /28, /31, /32, /33, /35, /36 and /37 receptacles.
6. Link to be free rotating about post.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Material:
Shell - Aluminum
Insert - Silicone rubber

Custodians:
Army - EL
Navy - AS
Air Force - 17

Review activities:
Army - MI, MU, AV, WC
Navy - SH, EC, OS
Air Force - 11, 85
DSA - ES

User activities:
Army - ME, AT
Navy - MC
Air Force -

Preparing activity:
Navy - AS

(Project 5935-1646-18)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.