
MIL-C-81511/19D
30 October 1970
SUPERSEDING
MIL-C-81511/19C
5 June 1970


MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING; AND ACCESSORIES; RECEPTACLE, DUMMY STOWAGE, FOR SERIES 2 CONNECTORS

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-81511.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

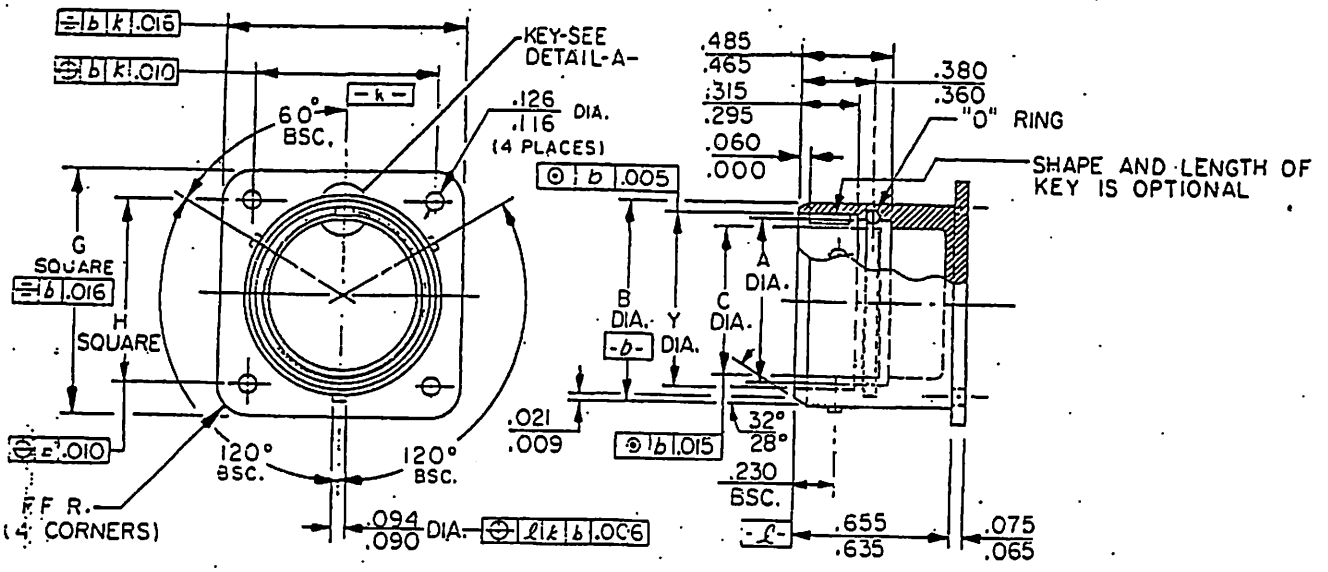

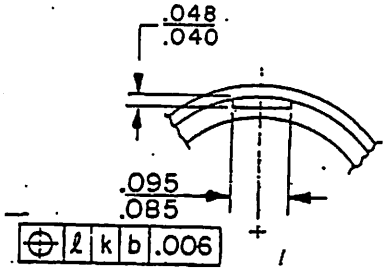

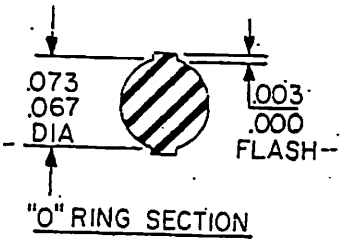

INCHES	MM	INCHES	MM	INCHES	MM
.003	.08	.060	1.52	.126	3.20
.005	.13	.065	1.65	.230	5.84
.006	.15	.067	1.70	.295	7.49
.009	.23	.073	1.85	.315	8.00
.010	.25	.075	1.91	.360	9.14
.015	.38	.085	2.16	.380	9.65
.016	.41	.090	2.29	.465	11.81
.021	.53	.094	2.39	.485	12.32
.025	.64	.095	2.41	.635	16.13
.031	.79	.116	2.95	.655	16.64
.040	1.02				
.048	1.22				

Source: https://assist.dla.mil - Downloaded: 202610-23T05:34Z
Check the source to verify that this is the current version before use.

FSC 5935

Part number	Temp. rating (°C)	Shell size (REF)	A dia	B dia	C dia	G square	H square	Y dia	FF rad	Weight (pounds) (REF)
M81511/19-08-1	150	8	.392 (9.96)	.553 (14.05)	.301 (7.65)	.820 (20.83)	.599 (15.21)	.465 (11.81)	.120 (3.05)	.0118
M81511/19-08-2	175-200		.386 (9.80)	.547 (13.89)	.292 (7.42)	.804 (20.42)	.589 (14.96)	.455 (11.56)	.100 (2.54)	
M81511/19-10-1	150	10	.517 (13.13)	.678 (17.22)	.426 (10.82)	.945 (24.00)	.724 (18.39)	.590 (14.99)	.120 (3.05)	.0148
M81511/19-10-2	175-200		.511 (12.98)	.672 (17.07)	.417 (10.59)	.929 (23.60)	.714 (18.14)	.580 (14.73)	.100 (2.54)	
M81511/19-14-1	150	14	.767 (19.48)	.928 (23.57)	.676 (17.17)	1.133 (28.78)	.911 (23.14)	.840 (21.34)	.120 (3.05)	.020
M81511/19-14-2	175-200		.761 (19.33)	.922 (23.42)	.667 (16.94)	1.117 (28.37)	.901 (22.89)	.830 (21.08)	.100 (2.54)	
M81511/19-16-1	150	16	.893 (22.68)	1.054 (26.77)	.802 (20.37)	1.258 (31.95)	.974 (24.74)	.966 (24.54)	.150 (3.81)	.023
M81511/19-16-2	175-200		.887 (22.53)	1.048 (26.62)	.793 (20.14)	1.242 (31.55)	.964 (24.49)	.956 (24.28)	.130 (3.30)	
M81511/19-18-1	150	18	1.017 (25.83)	1.178 (29.92)	.926 (23.52)	1.351 (34.32)	1.067 (27.10)	1.090 (27.69)	.150 (3.81)	.025
M81511/19-18-2	175-200		1.011 (25.68)	1.172 (29.77)	.917 (23.29)	1.335 (33.91)	1.057 (26.85)	1.080 (27.43)	.130 (3.30)	

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Dimensions apply after plating.
5. This connector mates with MIL-C-81511/6 and /34 plug connectors.
6. For shell sizes 20, 22 and 24 use MIL-C-81511/30 connectors.

REQUIREMENTS:

Material:
Shell - Aluminum
Finish:
150° C - Cadmium plate over nickel, olive drab in color
175 - 200° C - Dull chromium over nickel

Custodians:
Army - EL
Navy - AS
Air Force - 17

Preparing activity:
Navy - AS

Review activities:
Army - MI, MU, AV, WC
Navy - SH, EC, OS
Air Force - 11, 80
DSA - ES

(Project No. 5935-1732-13)

User activities:
Army - ME, AT
Navy - MC
Air Force -

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.